SetuScan scale marker sheet

Print on A4 at 100 % / "Actual size". Do NOT use "Fit to page". Then check the ruler with a real ruler.



must measure exactly 100 mm

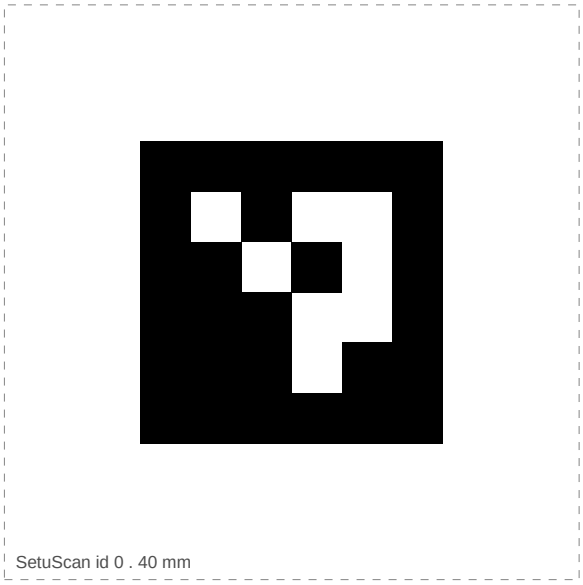

SetuScan id 0 . 40 mm

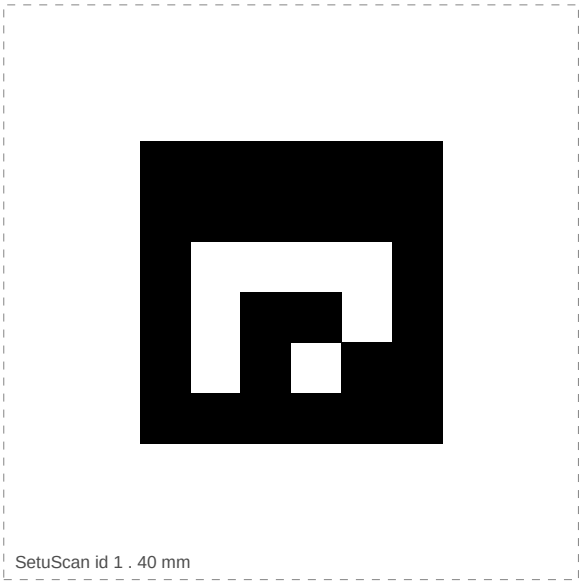

SetuScan id 1 . 40 mm



SetuScan id 2 . 20 mm



SetuScan id 3 . 20 mm

How to photograph a crack

1. Cut out one card along the dashed line. Use a big card (40 mm) normally, a small one (20 mm) for close-ups.
2. Stick it FLAT on the same surface as the crack, 2-10 cm from it (masking tape on the corners). Do not cover the crack.
3. Hold the phone roughly parallel to the surface, about 20-40 cm away, so the card and the crack fill most of the frame.
4. Use even light. Avoid flash glare and harsh sun. Tap the screen to focus on the crack, hold steady.
5. For a later visit, put the card back near the same spot and shoot from about the same position.
6. Check the ruler above: if it is not 100 mm, the print was scaled and every measurement will be wrong.

Safety and privacy

Only photograph surfaces you can reach safely from the ground. Never climb or lean over edges for a photo.

Do not photograph people, vehicles' number plates, or private interiors without permission.

SetuScan is decision support. It does not certify that a structure is safe. A qualified engineer decides.

Markers: OpenCV ArUco dictionary DICT_4X4_50, ids 0-3. Sizes are the black square's outer edge.