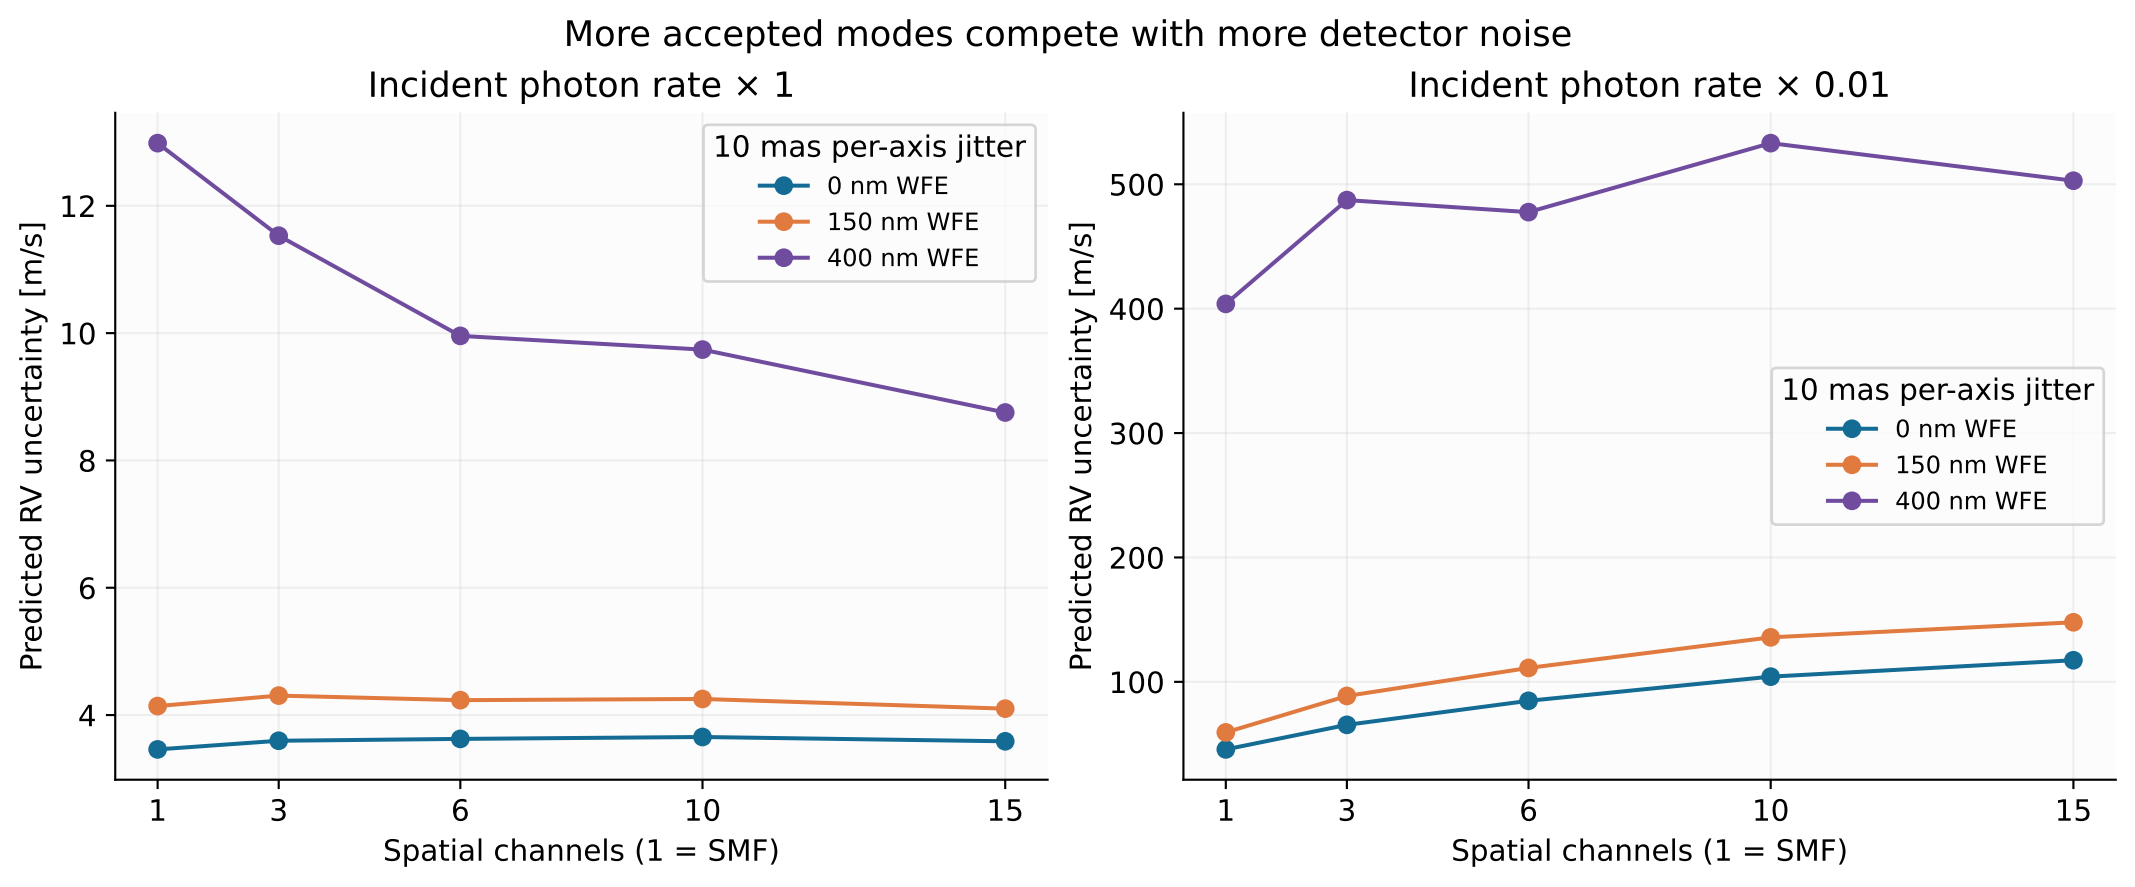
More accepted modes compete with more detector noise
Incident photon rate × 1
Incident photon rate × 0.01
Predicted RV uncertainty [m/s]
Spatial channels (1 = SMF)
10 mas per-axis jitter
0 nm WFE
150 nm WFE
400 nm WFE
1
3
6
10
15
4
6
8
10
12
100
200
300
400
500