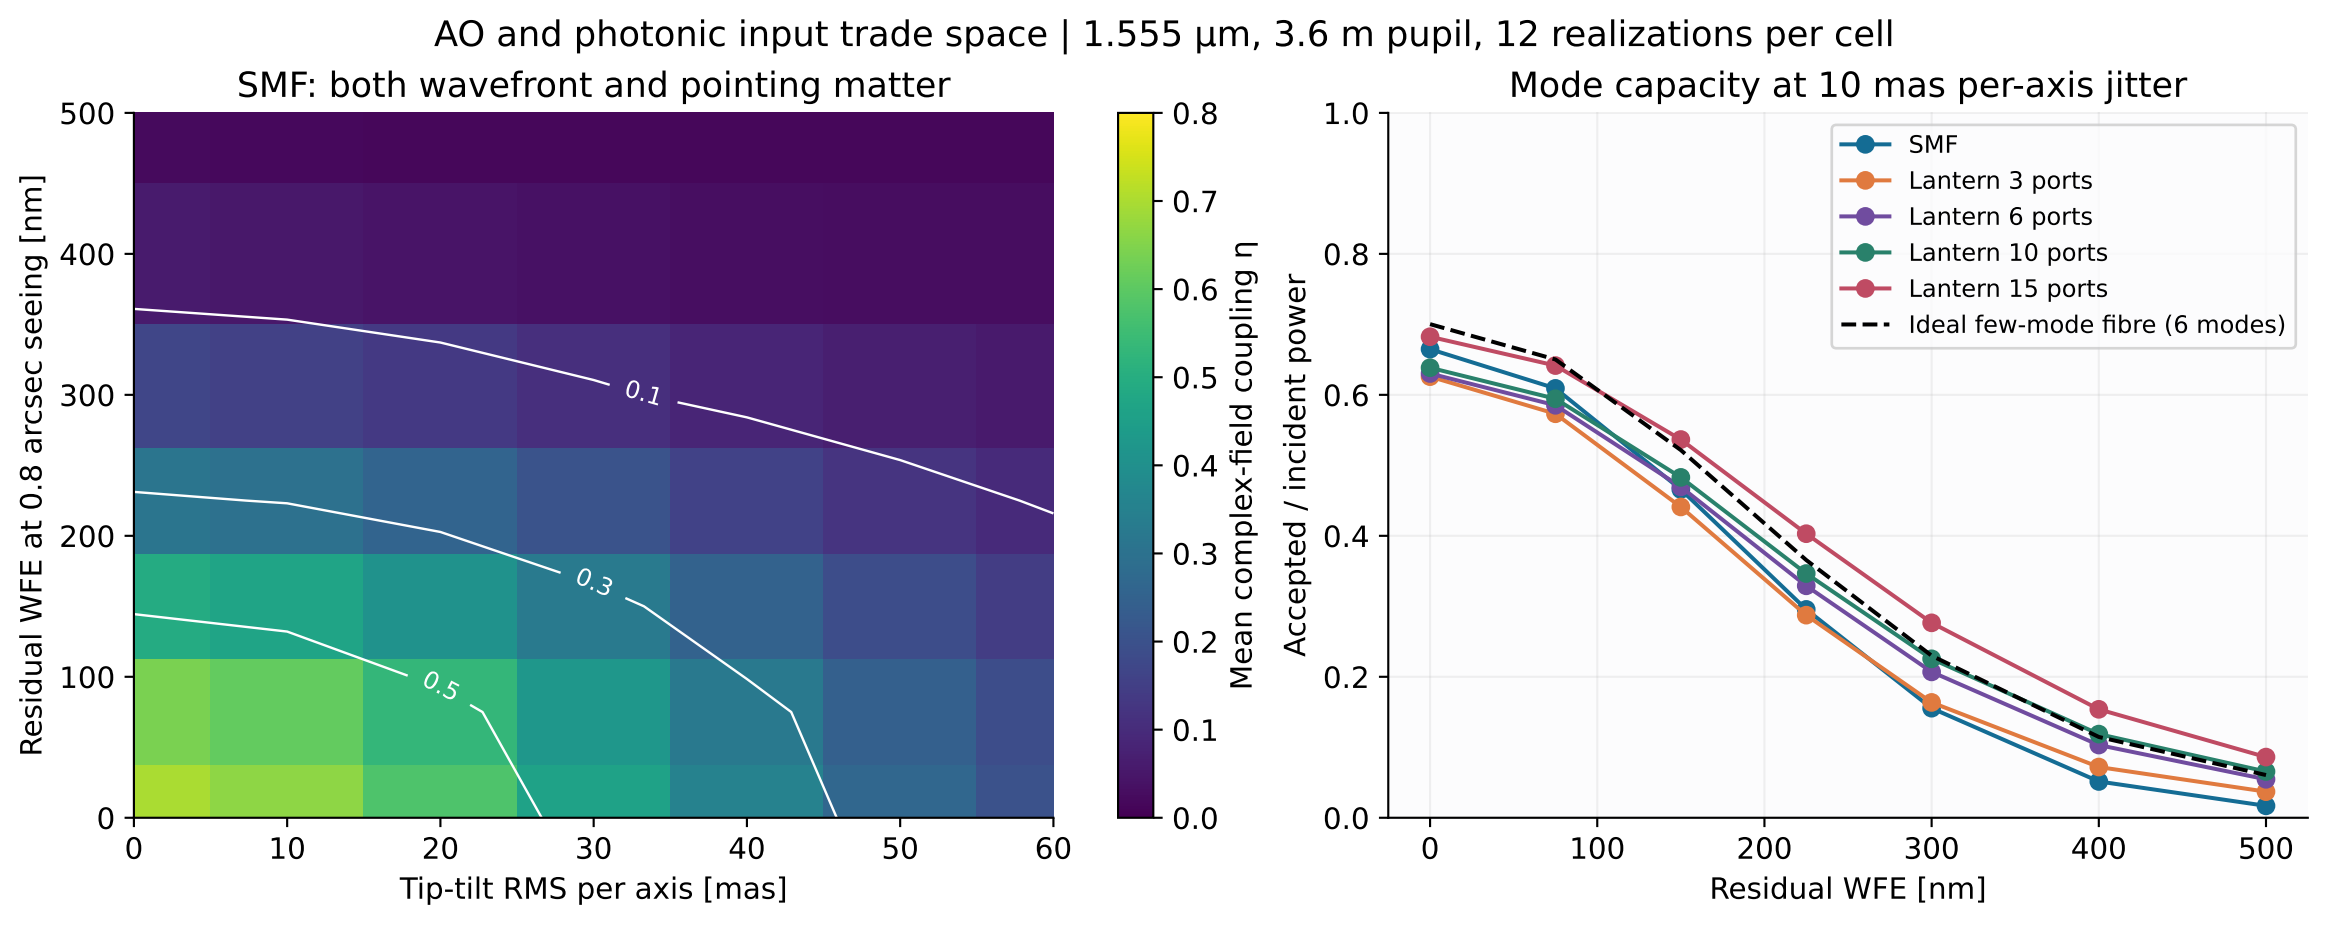
AO and photonic input trade space | 1.555 µm, 3.6 m pupil, 12 realizations per cell
SMF: both wavefront and pointing matter
Residual WFE at 0.8 arcsec seeing [nm]
Tip-tilt RMS per axis [mas]
Mean complex-field coupling η
0.1
0.3
0.5
Mode capacity at 10 mas per-axis jitter
Accepted / incident power
Residual WFE [nm]
SMF
Lantern 3 ports
Lantern 6 ports
Lantern 10 ports
Lantern 15 ports
Ideal few-mode fibre (6 modes)