
ARM_REBOT · reachable positions and static payload capacity

Below 0.5 kg · 0.5–1 kg · 1–1.5 kg · 1.5–2 kg · At least 2 kg

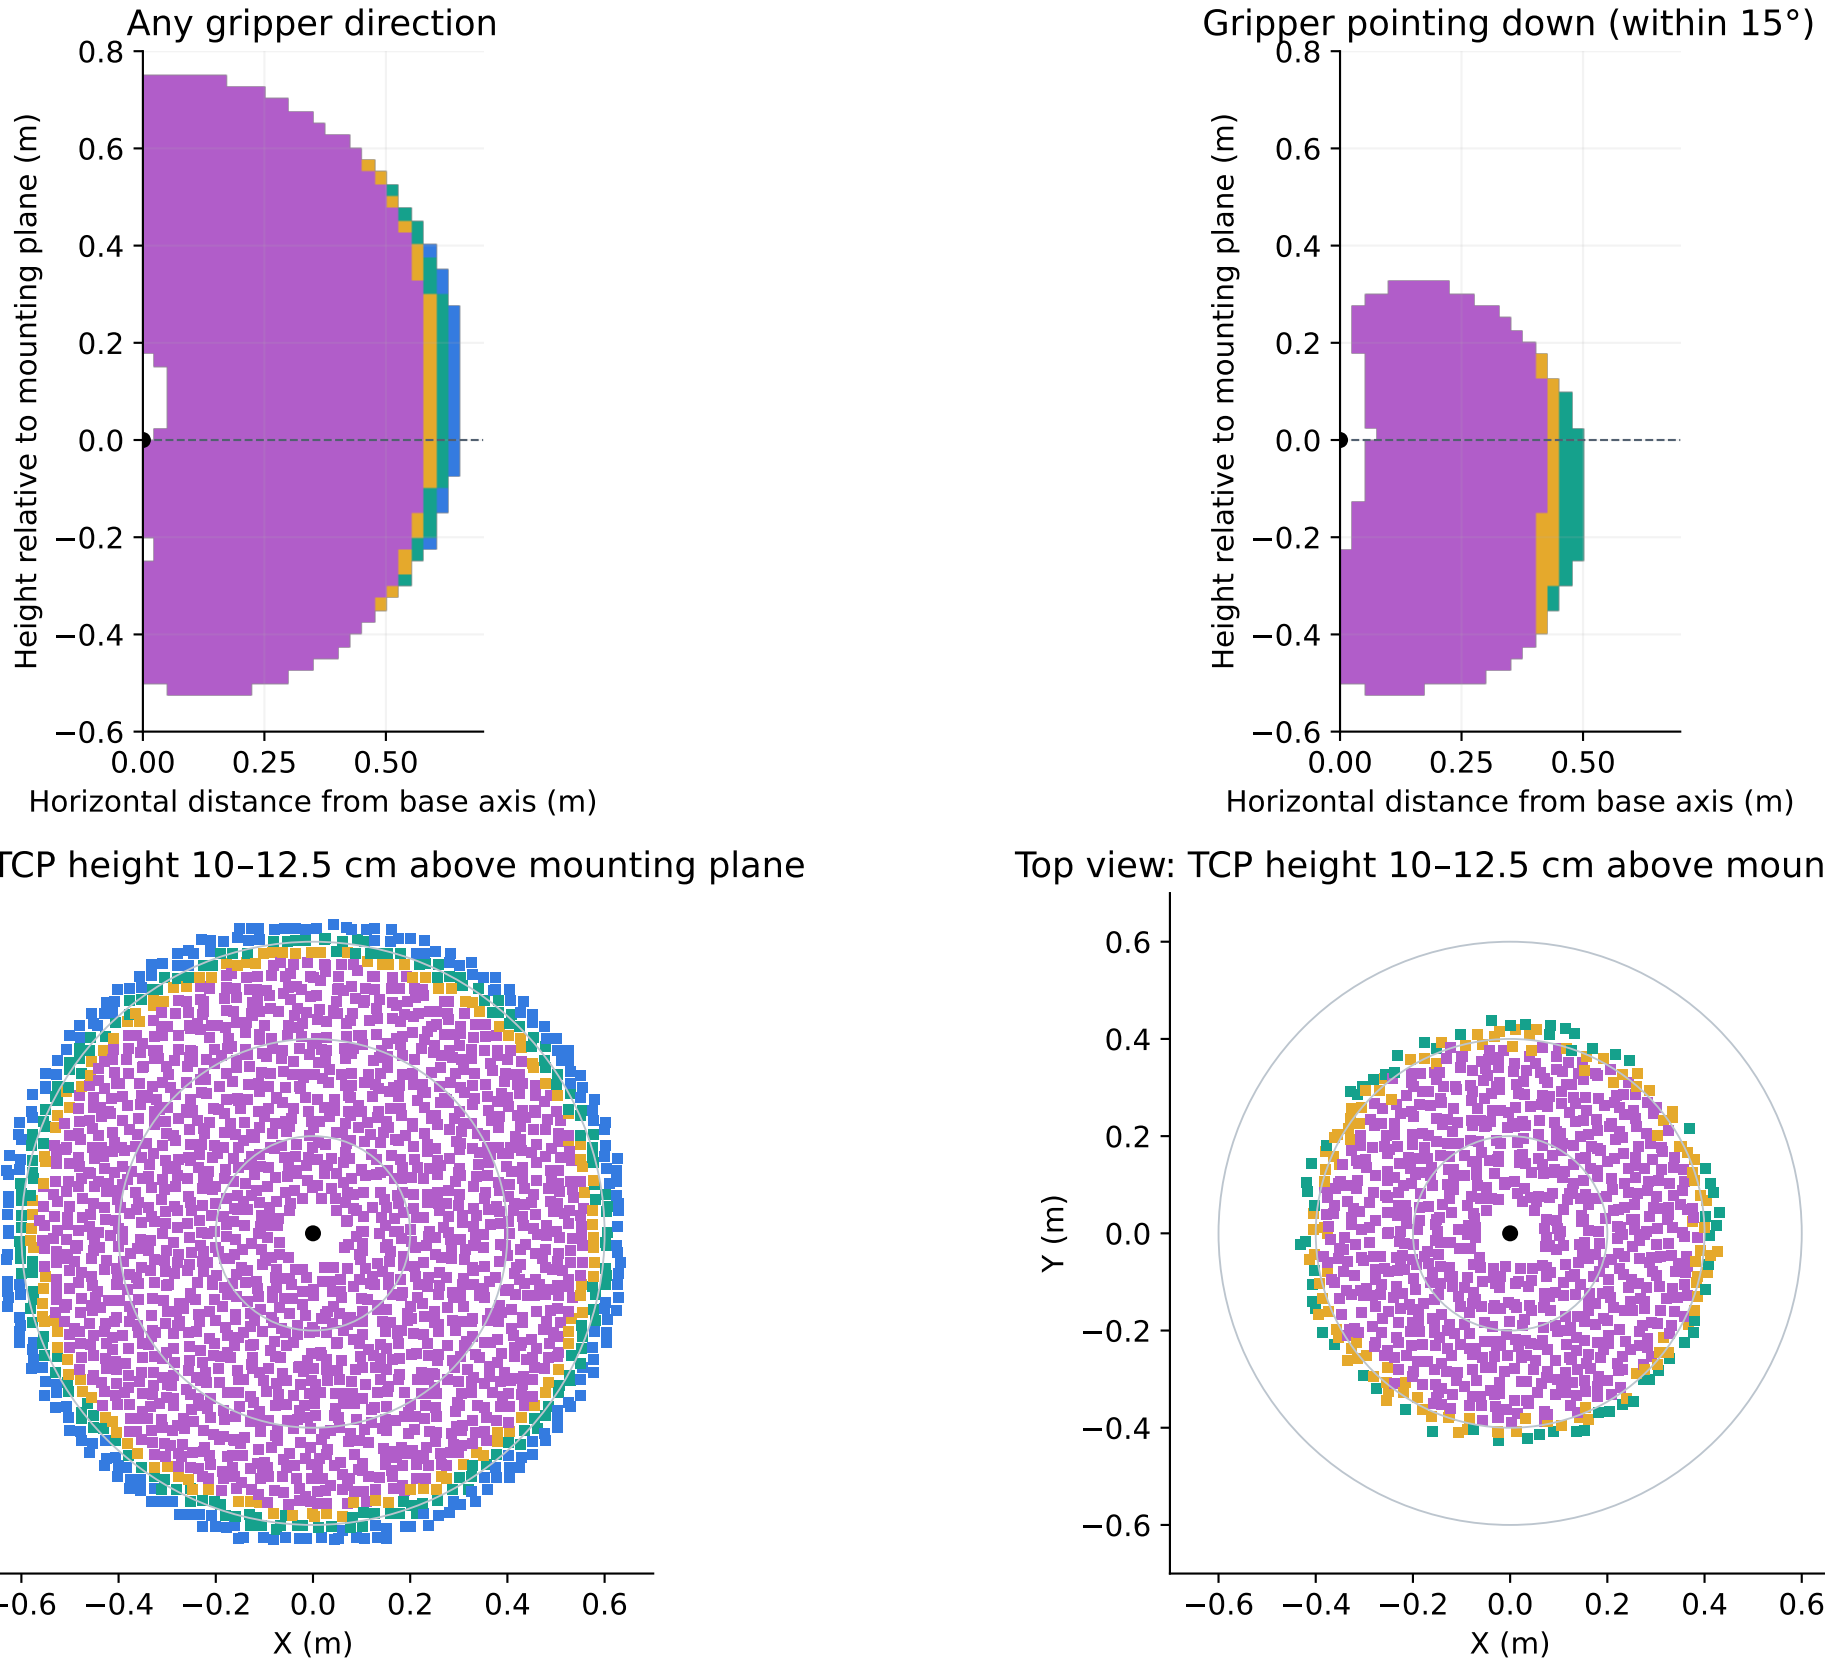

Upper panels: best sampled posture and azimuth at each radius/height. Lower panels: a thin height slice.
67,108,864 joint samples • 2.5 cm cells • 13 N·m per joint • self-collision screened with approximate spheres
Base fixed upright; payload COM at TCP. No floor/table, load geometry, acceleration, grip or strength checks.