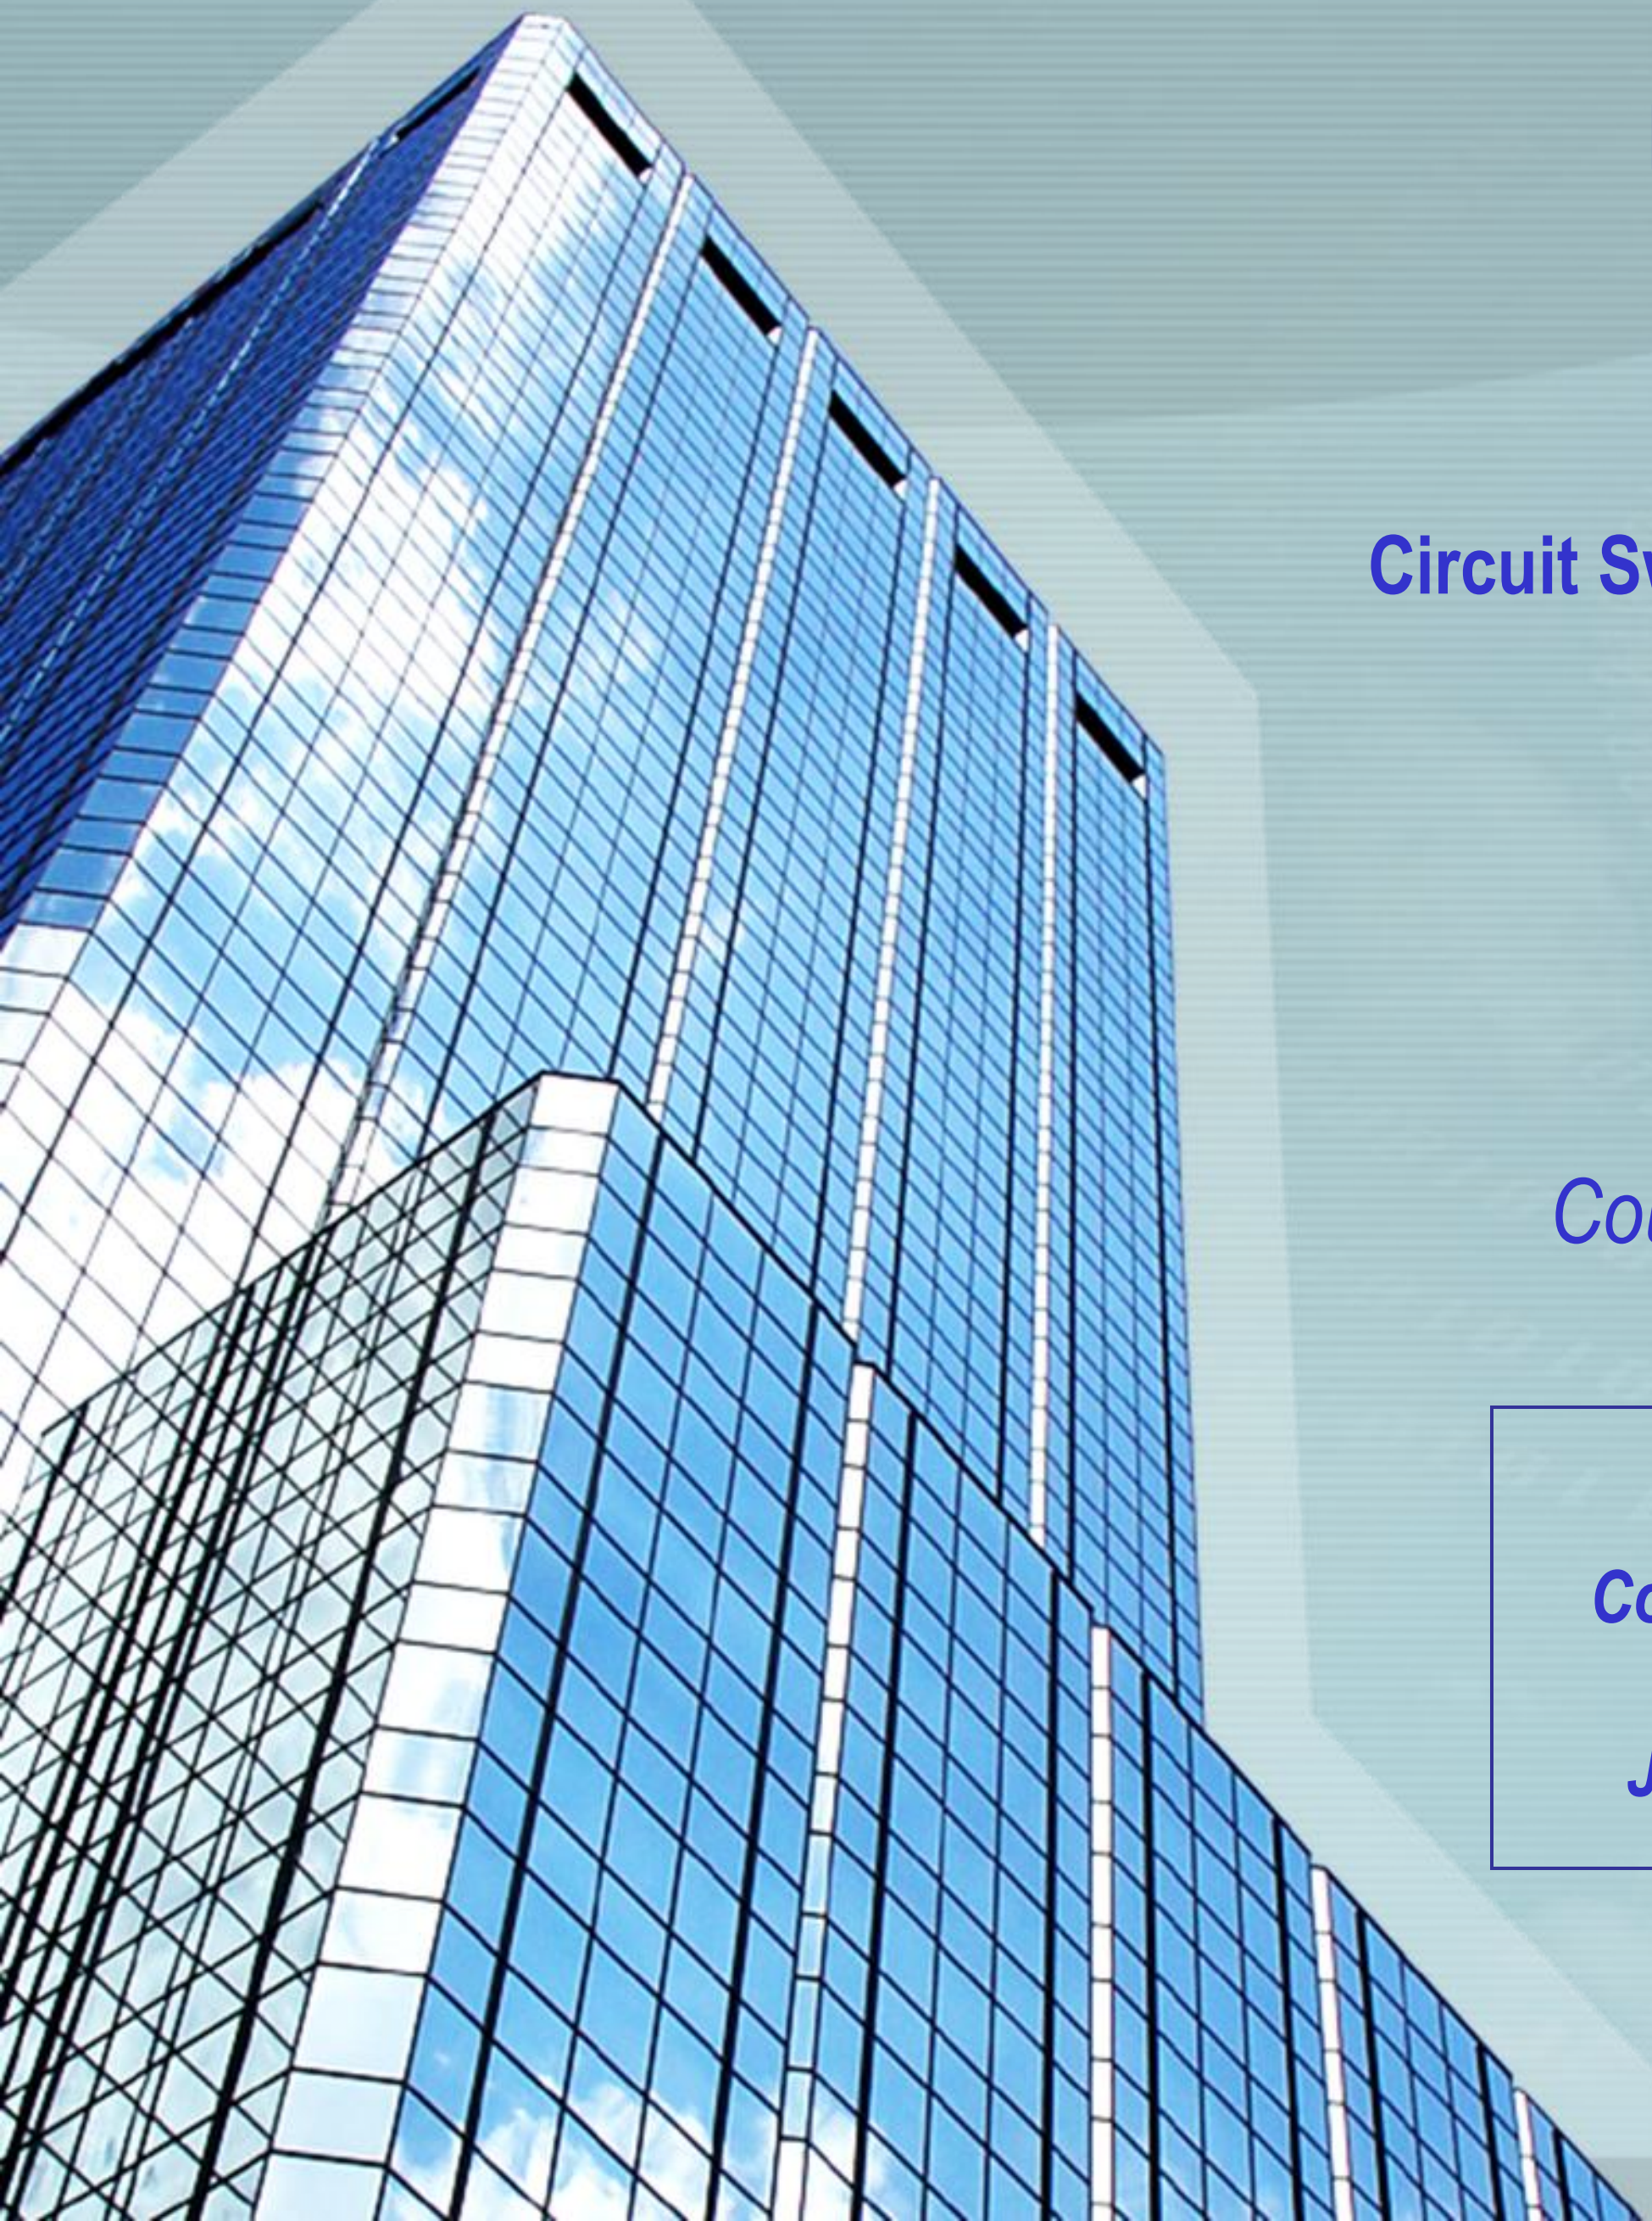

Data Communications & Networks

Session 8 – Main Theme
Networks: Part II
Circuit Switching, Packet Switching, The Network Layer

Dr. Jean-Claude Franchitti

New York University
Computer Science Department
Courant Institute of Mathematical Sciences

Adapted from course textbook resources
Computer Networking: A Top-Down Approach, 6/E

Agenda

1 Session Overview

2 Networks Part 2

3 Summary and Conclusion

What is the class about?

- Course description and syllabus:
  - » http://www.nyu.edu/classes/jcf/csci-ga.2262-001/
  - » http://cs.nyu.edu/courses/spring16/CSCI-GA.2262-001/index.html

- Textbooks:
  - » ***Computer Networking: A Top-Down Approach (6th Edition)***



James F. Kurose, Keith W. Ross
Addison Wesley
ISBN-10: 0132856204, ISBN-13: 978-0132856201, 6th Edition (02/24/12)

Course Overview

- Computer Networks and the Internet
- Application Layer
- Fundamental Data Structures: queues, ring buffers, finite state machines
- Data Encoding and Transmission
- Local Area Networks and Data Link Control
- Wireless Communications
- Packet Switching
- OSI and Internet Protocol Architecture
- Congestion Control and Flow Control Methods
- Internet Protocols (IP, ARP, UDP, TCP)
- Network (packet) Routing Algorithms (OSPF, Distance Vector)
- IP Multicast
- Sockets

Course Approach

- Introduction to Basic Networking Concepts (Network Stack)
- Origins of Naming, Addressing, and Routing (TCP, IP, DNS)
- Physical Communication Layer
- MAC Layer (Ethernet, Bridging)
- Routing Protocols (Link State, Distance Vector)
- Internet Routing (BGP, OSPF, Programmable Routers)
- TCP Basics (Reliable/Unreliable)
- Congestion Control
- QoS, Fair Queuing, and Queuing Theory
- Network Services – Multicast and Unicast
- Extensions to Internet Architecture (NATs, IPv6, Proxies)
- Network Hardware and Software (How to Build Networks, Routers)
- Overlay Networks and Services (How to Implement Network Services)
- Network Firewalls, Network Security, and Enterprise Networks

Networks Part 2 Session in Brief

- Understand principles behind network layer services:
  - Routing (path selection)
  - Dealing with scale
  - Advanced topics: IPv6, mobility
- Instantiation, implementation in the Internet
- Conclusion

Icons / Metaphors

Information

Common Realization

Knowledge/Competency Pattern

Governance



Alignment

Solution Approach

Agenda

1	**Session Overview**
2	**Networks Part 2**
3	**Summary and Conclusion**

Networks Part 2 Session in Brief

- Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- Routing in the Internet
  - RIP
  - OSPF
  - BGP
- Broadcast and multicast routing

Interplay between routing, forwarding

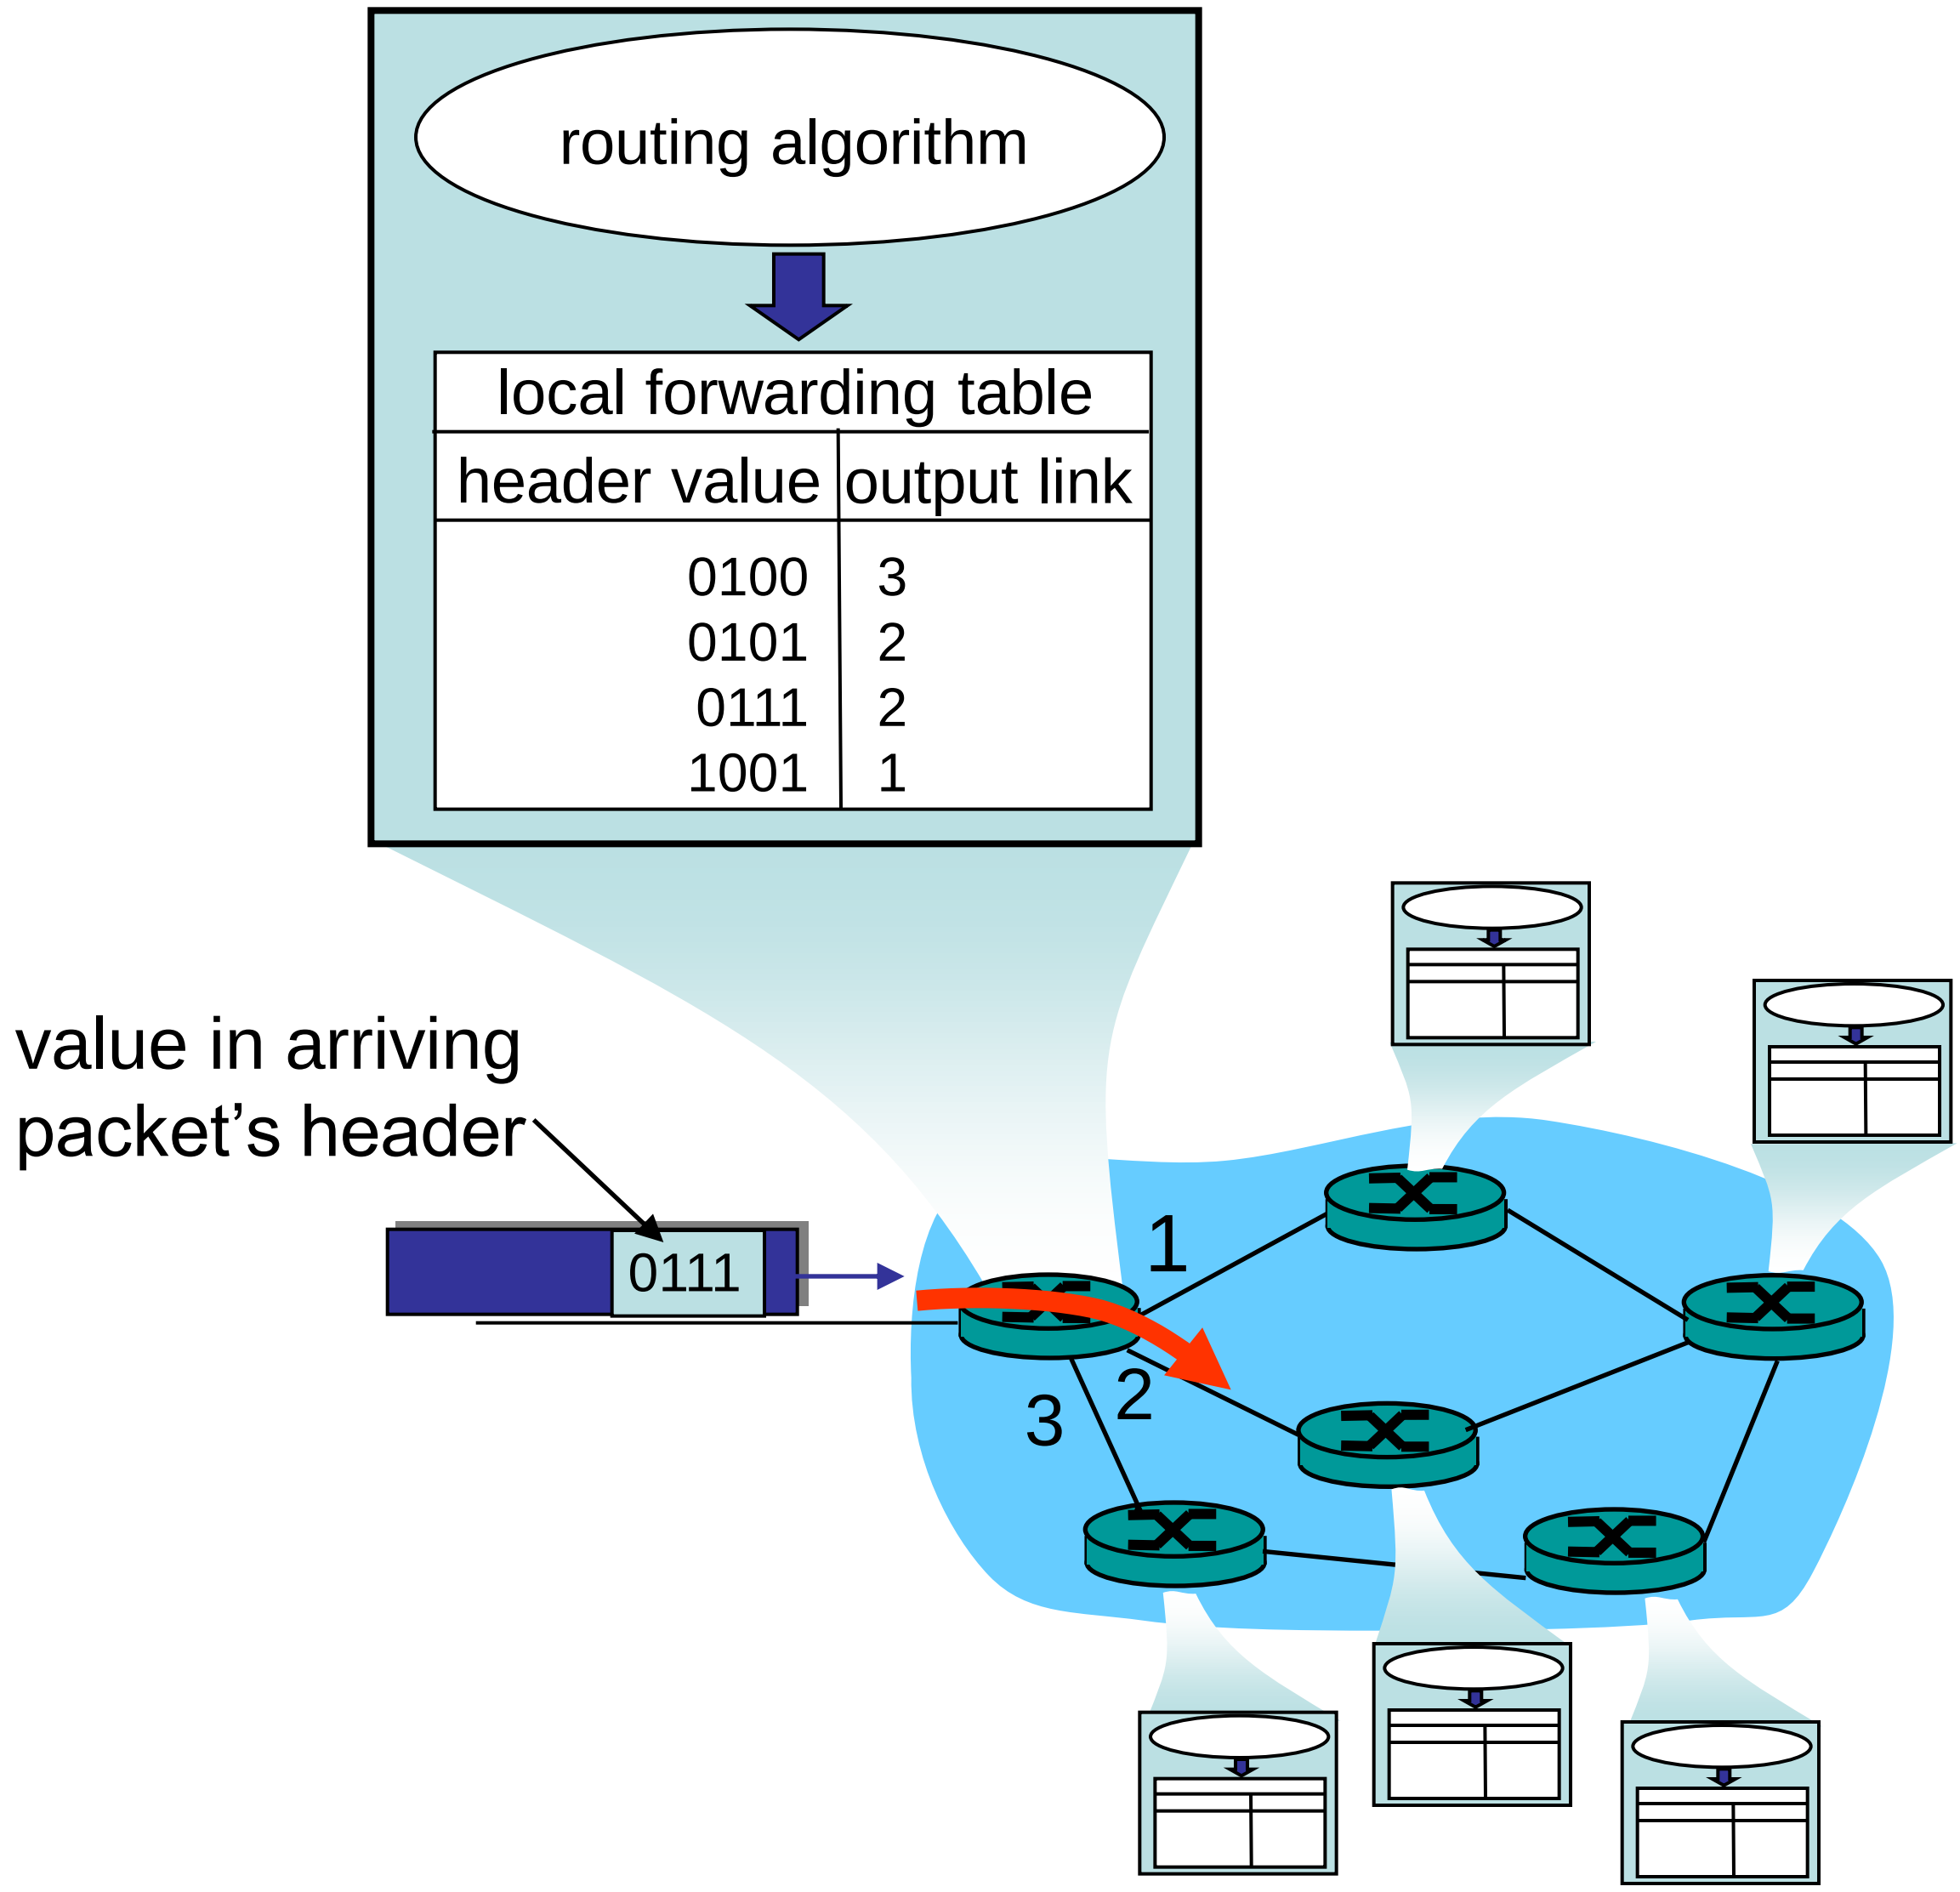

Graph abstraction

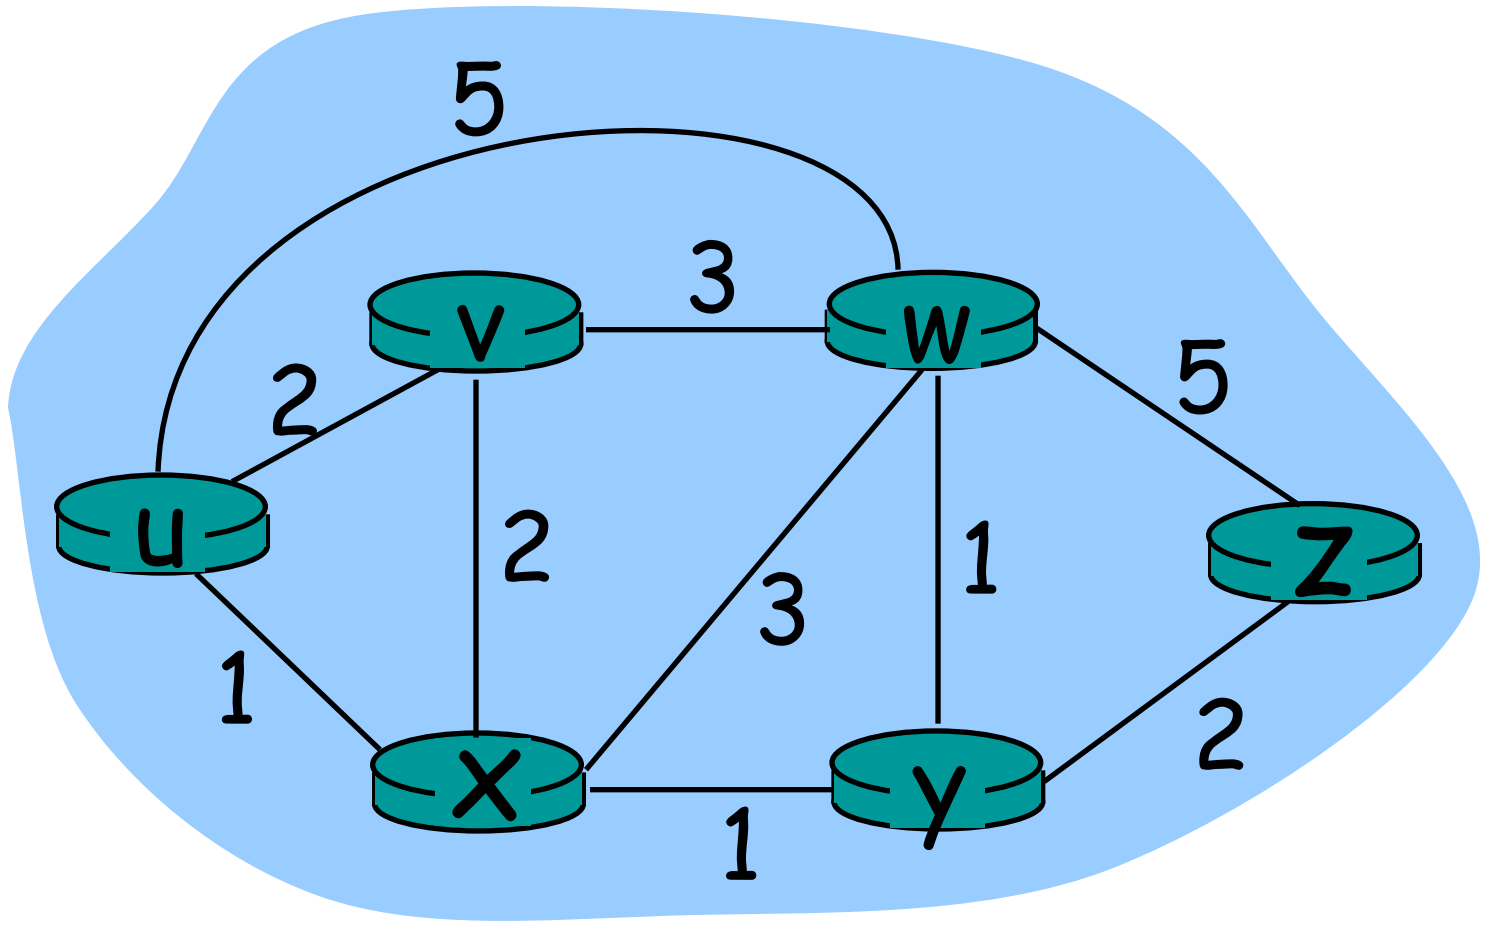

Graph: G = (N,E)

N = set of routers = { u, v, w, x, y, z }

E = set of links ={ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) }

Remark: Graph abstraction is useful in other network contexts

Example: P2P, where N is set of peers and E is set of TCP connections

Graph abstraction: costs

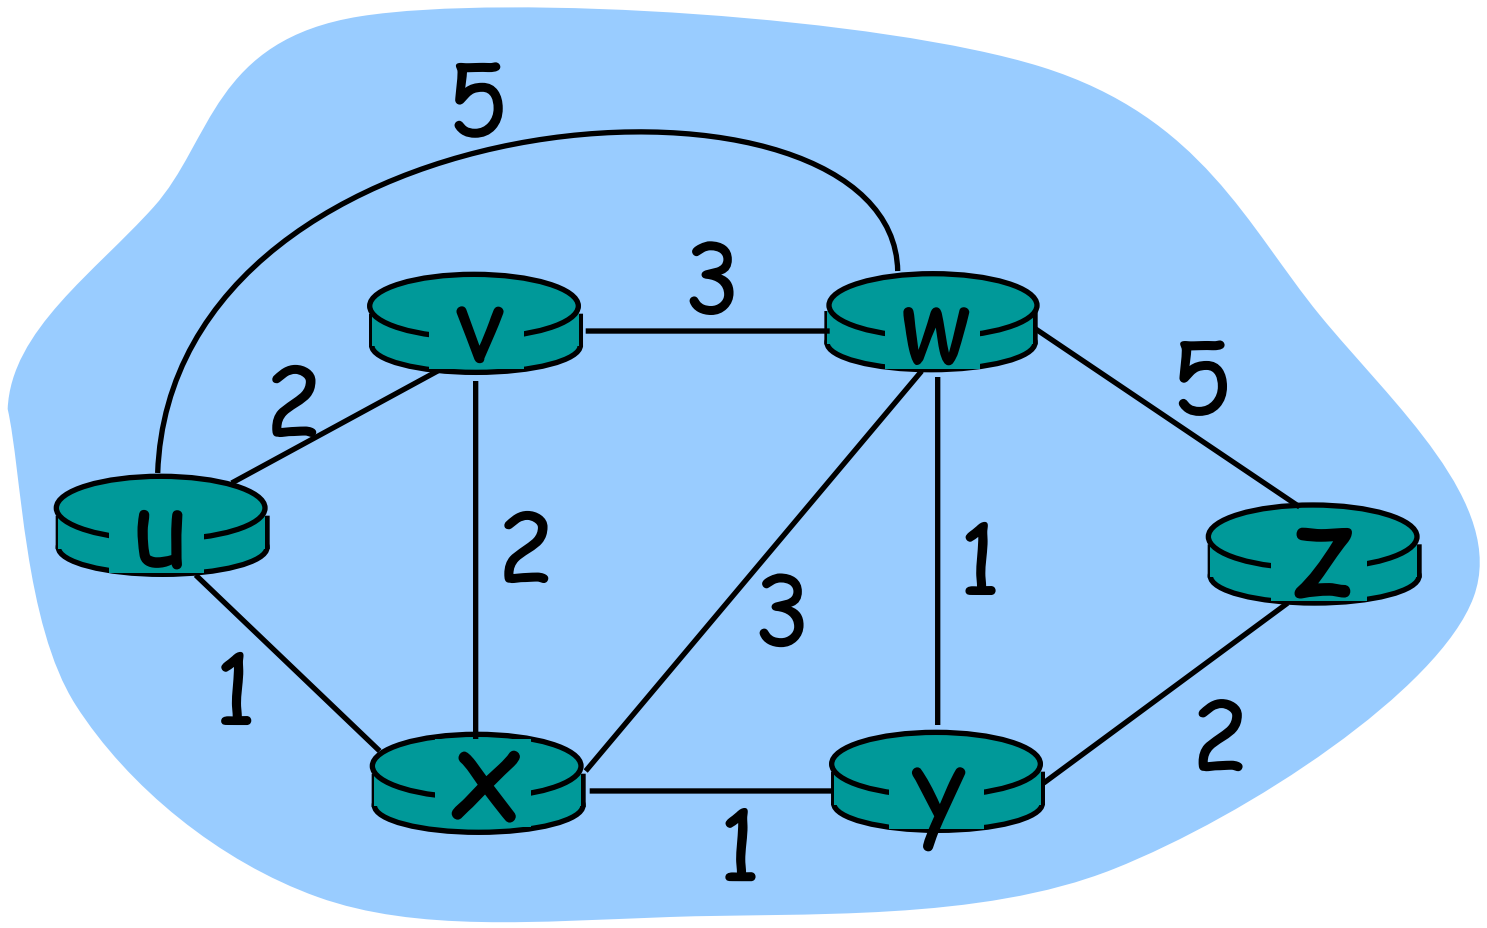

- $c(x,x')$ = cost of link (x,x')
  - e.g., $c(w,z) = 5$
- cost could always be 1, or inversely related to bandwidth, or inversely related to congestion

Cost of path $(x_1, x_2, x_3,\ldots, x_p) = c(x_1,x_2) + c(x_2,x_3) + \ldots + c(x_{p-1},x_p)$

Question: What's the least-cost path between u and z ?

Routing algorithm: algorithm that finds least-cost path

Routing Algorithm classification

Global or decentralized information?

Global:

- all routers have complete topology, link cost info
- "link state" algorithms

Decentralized:

- router knows physically-connected neighbors, link costs to neighbors
- iterative process of computation, exchange of info with neighbors
- "distance vector" algorithms

Static or dynamic?

Static:

- routes change slowly over time

Dynamic:

- routes change more quickly
  - periodic update
  - in response to link cost changes

Networks Part 2 Session in Brief

- Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- Routing in the Internet
  - RIP
  - OSPF
  - BGP
- Broadcast and multicast routing

A Link-State Routing Algorithm

Dijkstra's algorithm

- net topology, link costs known to all nodes
  - accomplished via "link state broadcast"
  - all nodes have same info
- computes least cost paths from one node ('source") to all other nodes
  - gives forwarding table for that node
- iterative: after k iterations, know least cost path to k dest.'s

Notation:

- c(x,y): link cost from node x to y; = ∞ if not direct neighbors
- D(v): current value of cost of path from source to dest. v
- p(v): predecessor node along path from source to v
- N': set of nodes whose least cost path definitively known

Dijsktra’s Algorithm

```
Initialization:
  N' = {u}
  for all nodes v
    if v adjacent to u
        then D(v) = c(u,v)
    else D(v) = ∞

 Loop
   find w not in N' such that D(w) is a minimum
   add w to N'
   update D(v) for all v adjacent to w and not in N' :
      D(v) = min( D(v), D(w) + c(w,v) )
   /* new cost to v is either old cost to v or known
    shortest path cost to w plus cost from w to v */
 until all nodes in N'
```

Dijkstra's algorithm: example

Step	N'	D(v),p(v)	D(w),p(w)	D(x),p(x)	D(y),p(y)	D(z),p(z)
0	u	2,u	5,u	1,u	∞	∞
1	ux	2,u	4,x		2,x	∞
2	uxy	2,u	3,y			4,y
3	uxyv		3,y			4,y
4	uxyvw					4,y
5	uxyvwz					

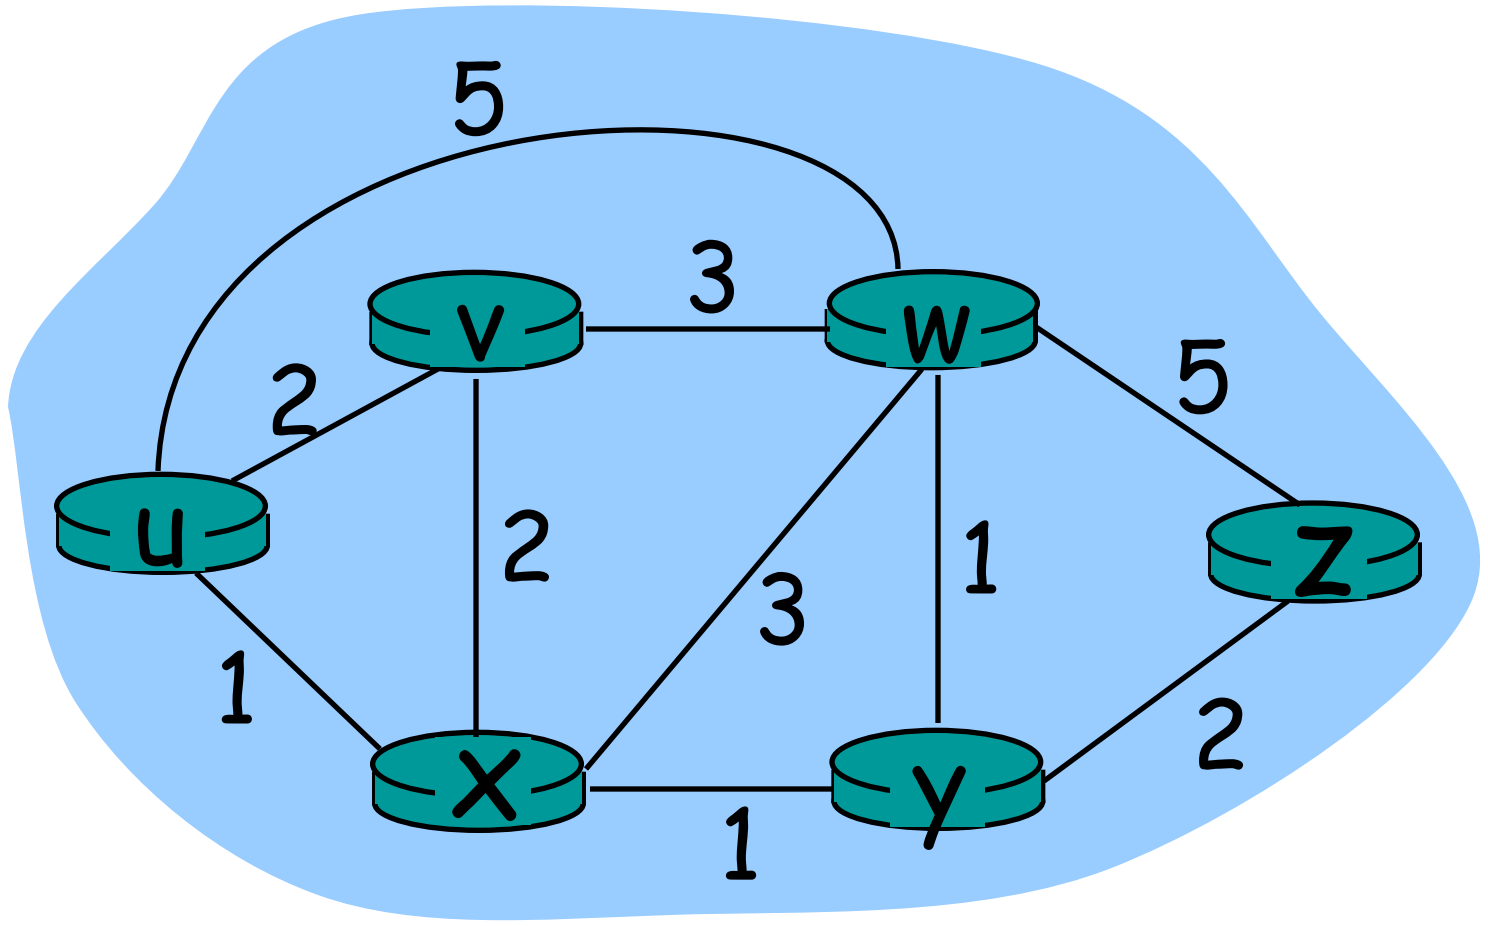

Dijkstra's algorithm: example (2)

Resulting shortest-path tree from u:

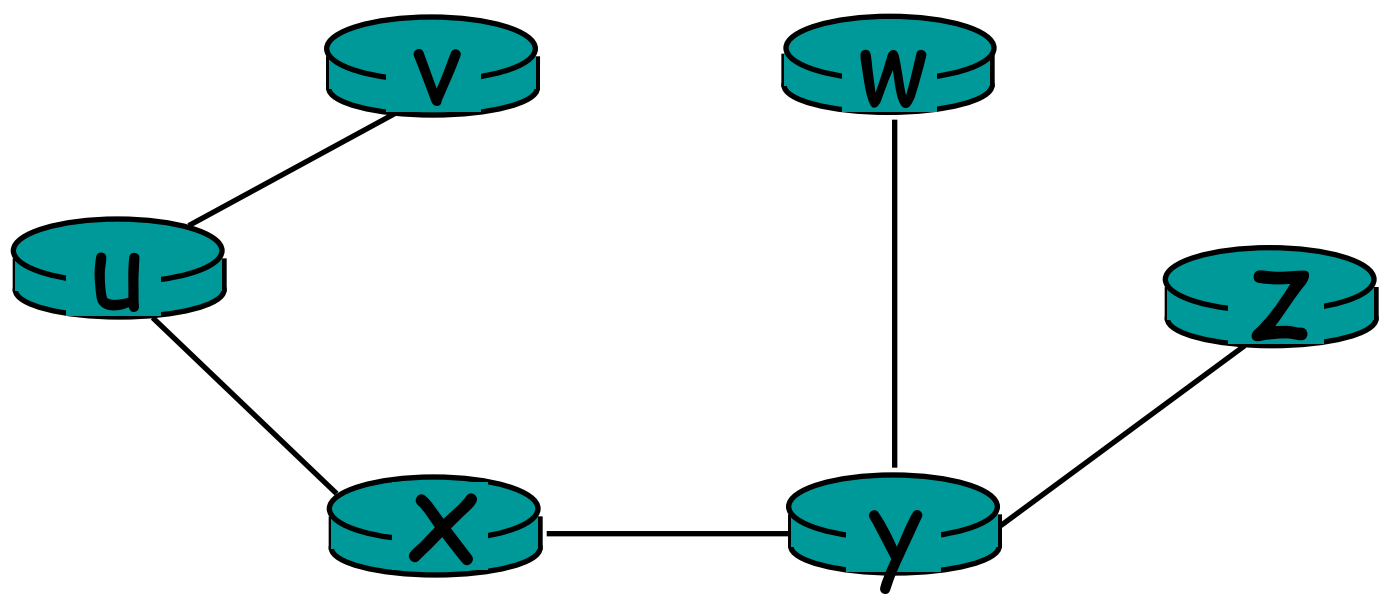

Resulting forwarding table in u:

destination	link
v	(u,v)
x	(u,x)
y	(u,x)
w	(u,x)
z	(u,x)

Dijkstra's algorithm, discussion

Algorithm complexity: n nodes

- each iteration: need to check all nodes, w, not in N
- n(n+1)/2 comparisons: $O(n^2)$
- more efficient implementations possible: O(nlogn)

Oscillations possible:

- e.g., link cost = amount of carried traffic

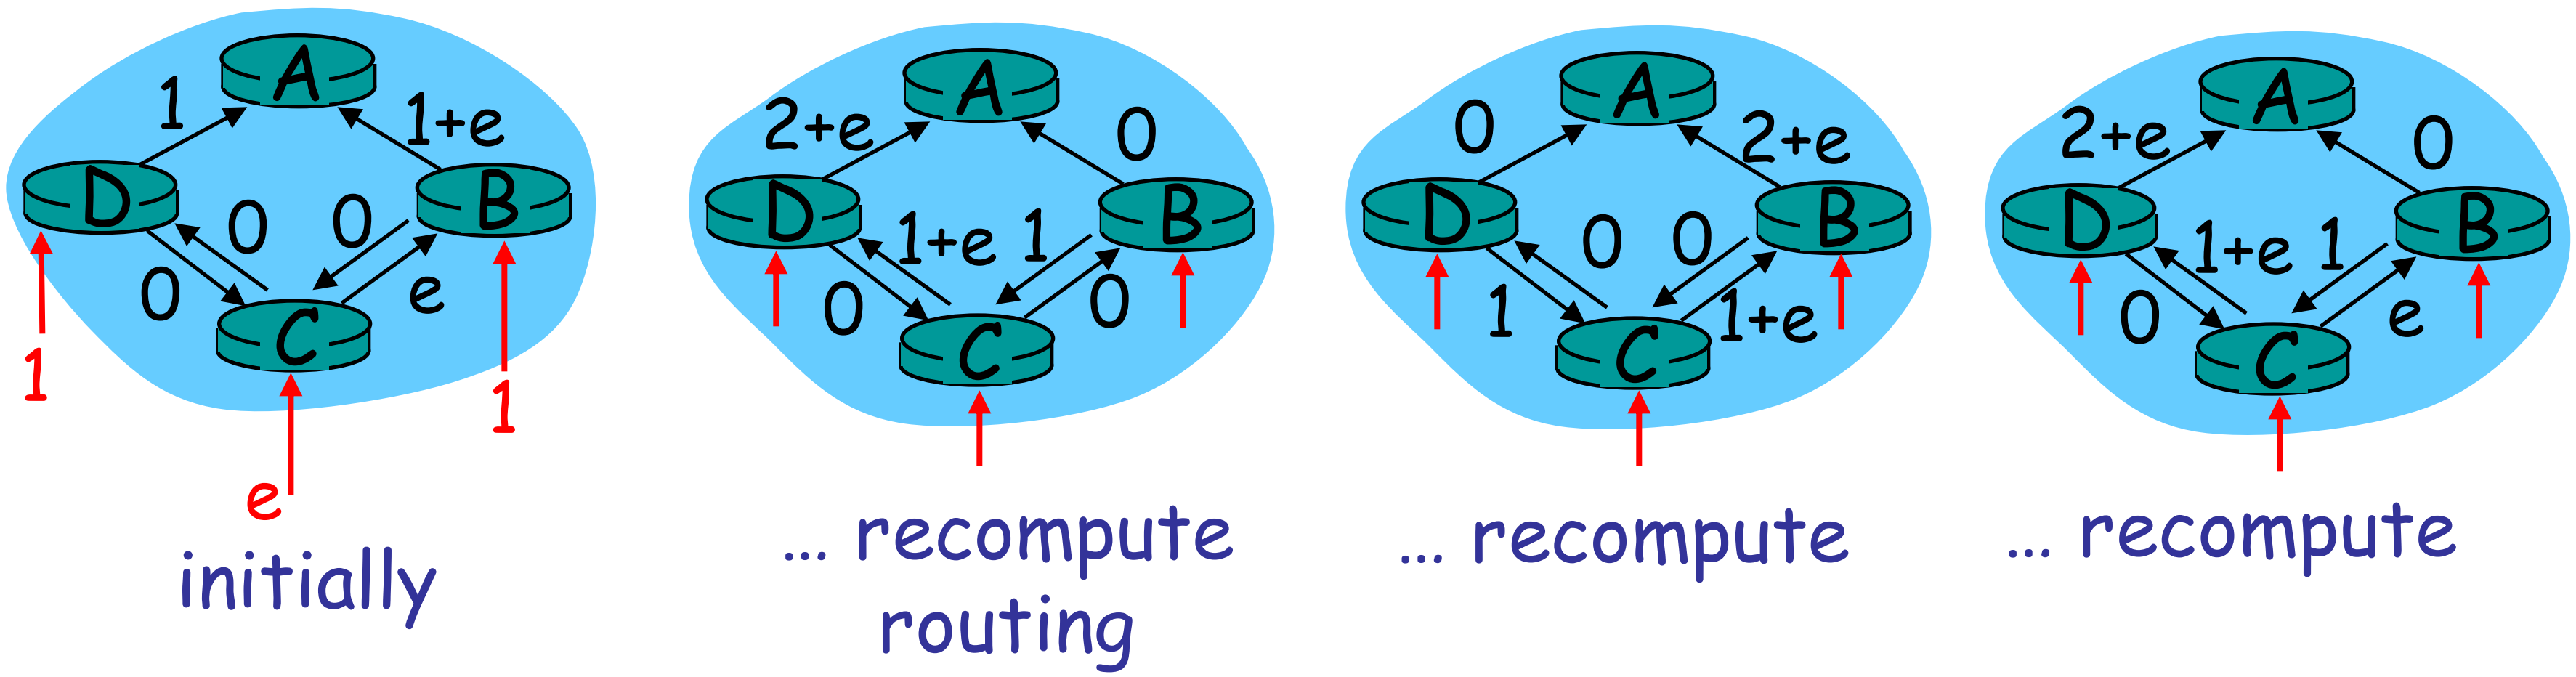

Networks Part 2 Session in Brief

- Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- Routing in the Internet
  - RIP
  - OSPF
  - BGP
- Broadcast and multicast routing

Distance Vector Algorithm

Bellman-Ford Equation (dynamic programming)

Define

$d_x(y)$:= cost of least-cost path from x to y

Then

$$\boxed{d_x(y) = \min_v \{c(x,v) + d_v(y)\}}$$

where min is taken over all neighbors v of x

Bellman-Ford example

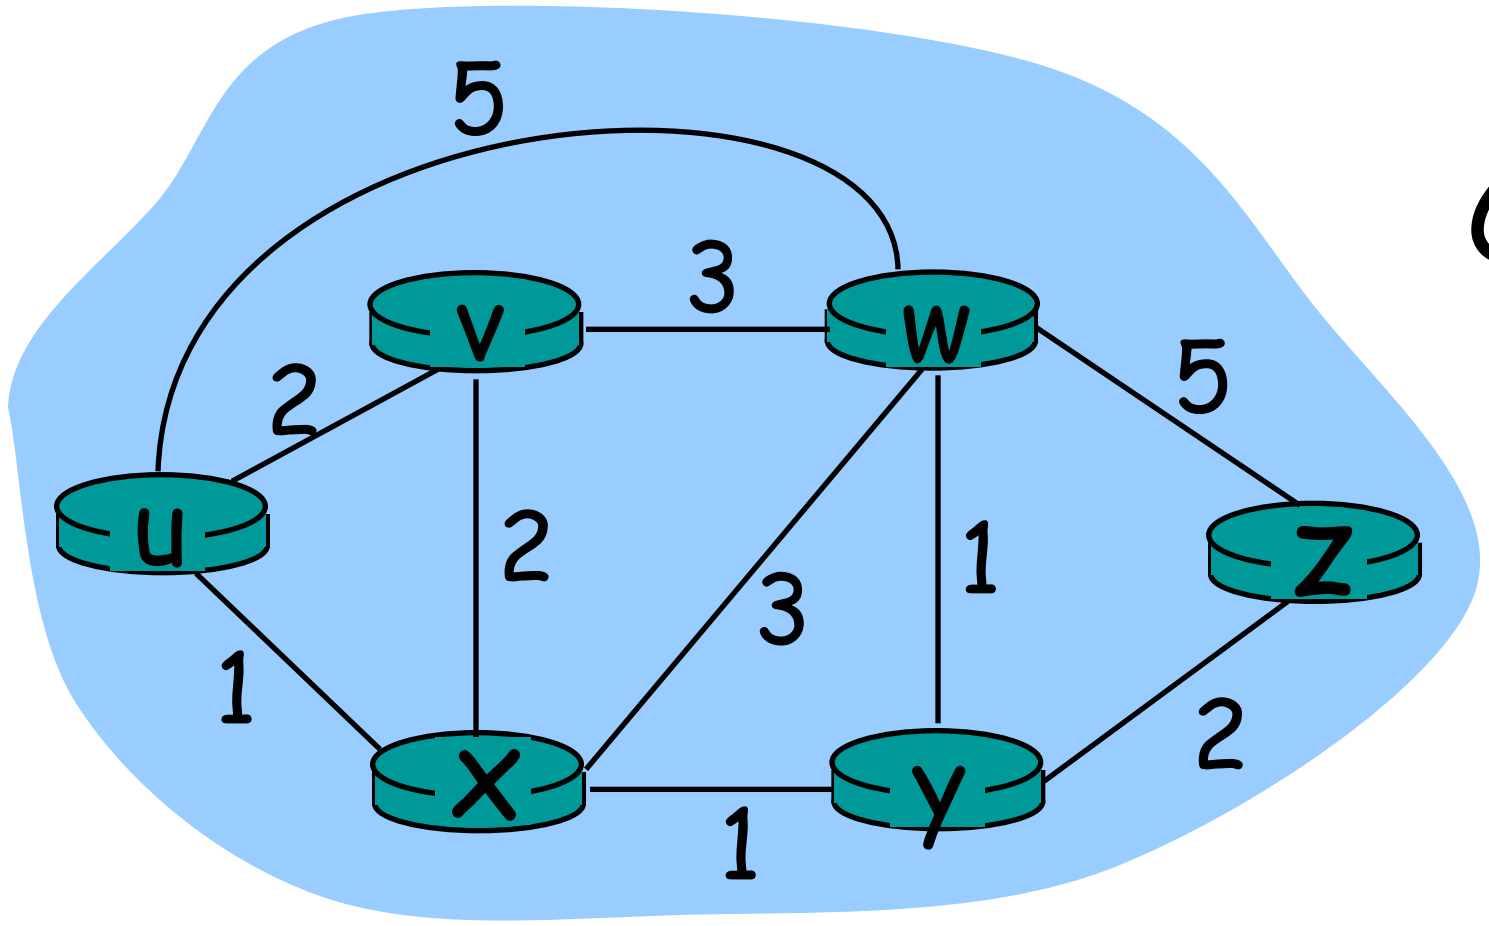

Clearly, $d_v(z) = 5$, $d_x(z) = 3$, $d_w(z) = 3$

B-F equation says:

$$
\begin{aligned}
d_u(z) &= \min \{ c(u,v) + d_v(z), \\
&\qquad c(u,x) + d_x(z), \\
&\qquad c(u,w) + d_w(z) \} \\
&= \min \{2 + 5, \\
&\qquad 1 + 3, \\
&\qquad 5 + 3\} = 4
\end{aligned}
$$

Node that achieves minimum is next hop in shortest path ➔ forwarding table

Distance Vector Algorithm

- $D_x(y)$ = estimate of least cost from x to y
- Node x knows cost to each neighbor v: $c(x,v)$
- Node x maintains distance vector $\mathbf{D}_x = [D_x(y): y \in N]$
- Node x also maintains its neighbors' distance vectors
  - For each neighbor v, x maintains $\mathbf{D}_v = [D_v(y): y \in N]$

Distance vector algorithm (4)

Basic idea:

- From time-to-time, each node sends its own distance vector estimate to neighbors
- Asynchronous
- When a node x receives new DV estimate from neighbor, it updates its own DV using B-F equation:

$$D_x(y) \leftarrow \min_v\{c(x,v) + D_v(y)\} \quad \text{for each node } y \in N$$

- Under minor, natural conditions, the estimate $D_x(y)$ *converge to the actual least cost* $d_x(y)$

Distance Vector Algorithm (5)

Iterative, asynchronous: each local iteration caused by:

- local link cost change
- DV update message from neighbor

Distributed:

- each node notifies neighbors *only* when its DV changes
  - neighbors then notify their neighbors if necessary

Each node:

wait for (change in local link cost or msg from neighbor)

recompute estimates

if DV to any dest has changed, *notify* neighbors

$$D_x(y) = \min\{c(x,y) + D_y(y),\ c(x,z) + D_z(y)\} = \min\{2+0\ ,\ 7+1\} = 2$$

$$D_x(z) = \min\{c(x,y) + D_y(z),\ c(x,z) + D_z(z)\} = \min\{2+1\ ,\ 7+0\} = 3$$

node x table

from \ cost to	x	y	z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	7	1	0

node y table

from \ cost to	x	y	z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

node z table

from \ cost to	x	y	z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

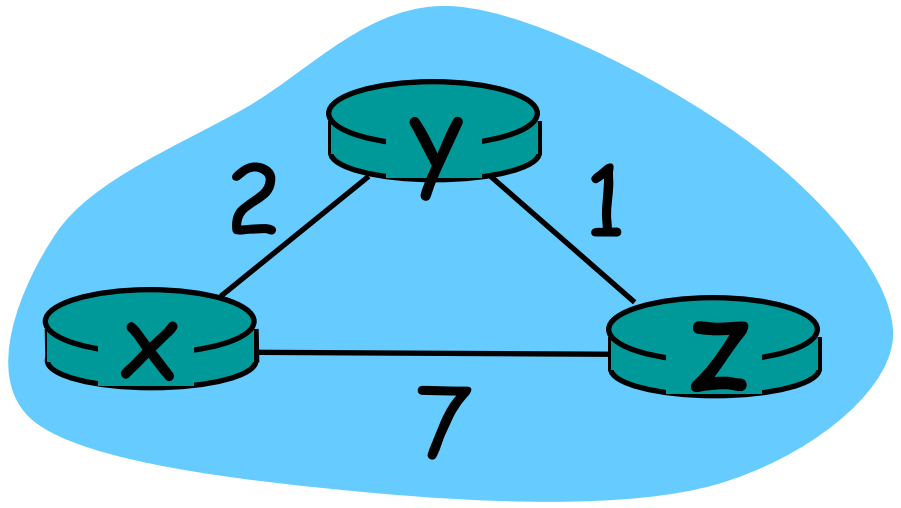

time

$D_x(y) = \min\{c(x,y) + D_y(y),\ c(x,z) + D_z(y)\}$
$= \min\{2+0\ ,\ 7+1\} = 2$

$D_x(z) = \min\{c(x,y) + D_y(z),\ c(x,z) + D_z(z)\}$
$= \min\{2+1\ ,\ 7+0\} = 3$

node x table

from \ cost to	x	y	z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	7	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

node y table

from \ cost to	x	y	z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	7
y	2	0	1
z	7	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

node z table

from \ cost to	x	y	z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

from \ cost to	x	y	z
x	0	2	7
y	2	0	1
z	3	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

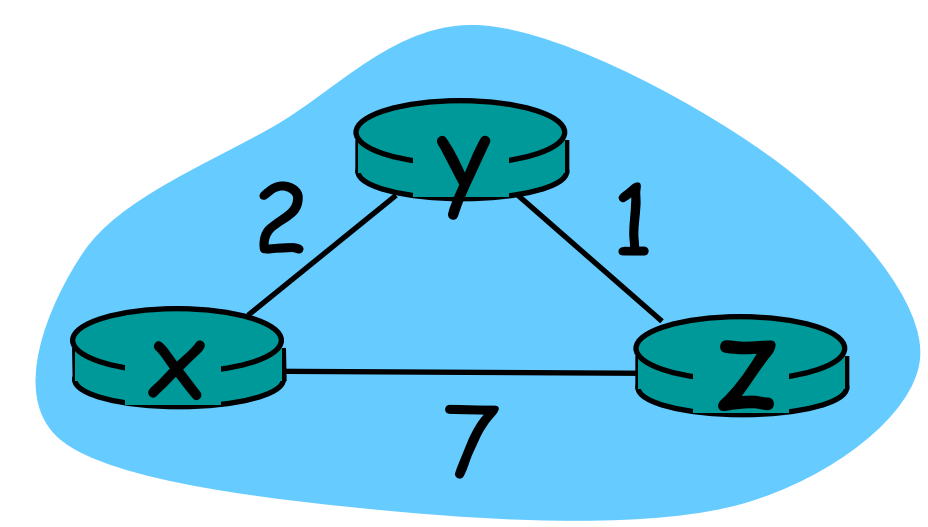

time

Distance Vector: link cost changes

Link cost changes:

- node detects local link cost change
- updates routing info, recalculates distance vector
- if DV changes, notify neighbors

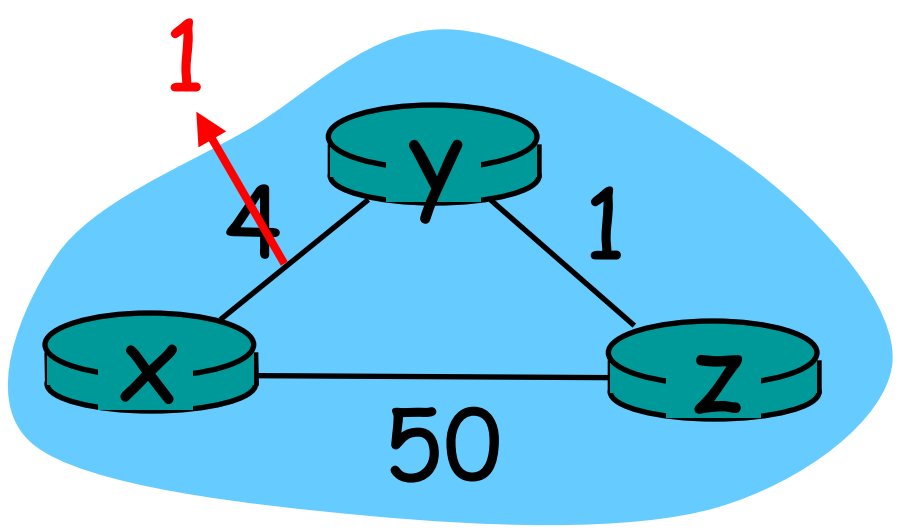

"good news travels fast"

At time t_0, *y* detects the link-cost change, updates its DV, and informs its neighbors.

At time t_1, *z* receives the update from *y* and updates its table. It computes a new least cost to *x* and sends its neighbors its DV.

At time t_2, *y* receives *z*'s update and updates its distance table. *y*'s least costs do not change and hence *y* does *not* send any message to *z*.

Distance Vector: link cost changes

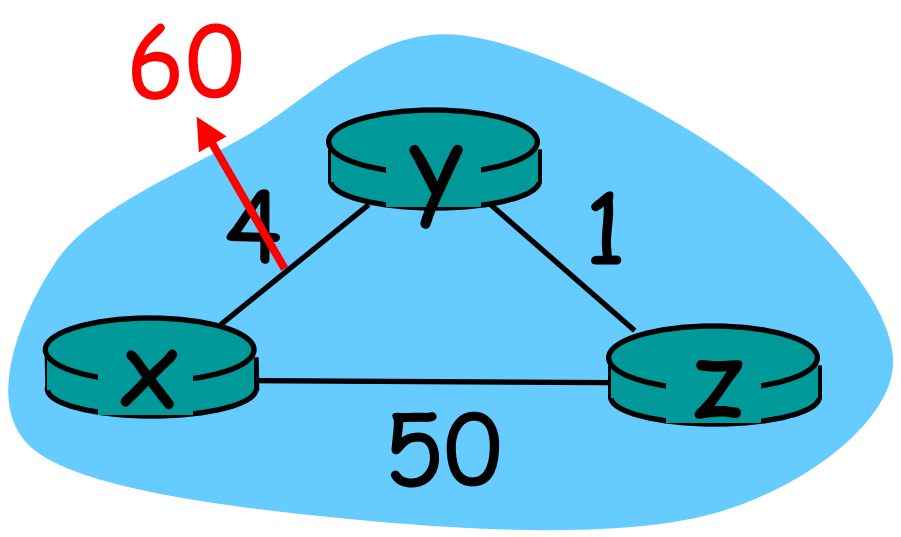

Link cost changes:

- good news travels fast
- bad news travels slow - "count to infinity" problem!
- 44 iterations before algorithm stabilizes: see text

Poisoned reverse:

- If Z routes through Y to get to X :
  - Z tells Y its (Z's) distance to X is infinite (so Y won't route to X via Z)
- will this completely solve count to infinity problem?

Comparison of LS and DV algorithms

Message complexity

- LS: with n nodes, E links, O(nE) msgs sent
- DV: exchange between neighbors only
  - » convergence time varies

Speed of Convergence

- LS: $O(n^2)$ algorithm requires O(nE) msgs
  - » may have oscillations
- DV: convergence time varies
  - » may be routing loops
  - » count-to-infinity problem

Robustness: what happens if router malfunctions?

LS:

- » node can advertise incorrect *link* cost
- » each node computes only its *own* table

DV:

- » DV node can advertise incorrect *path* cost
- » each node’s table used by others
  - error propagate thru network

Networks Part 2 Session in Brief

- Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- Routing in the Internet
  - RIP
  - OSPF
  - BGP
- Broadcast and multicast routing

Hierarchical Routing

Our routing study thus far - idealization

- all routers identical
- network "flat"

… *not* true in practice

scale: with 200 million destinations:

- can't store all dest's in routing tables!
- routing table exchange would swamp links!

administrative autonomy

- internet = network of networks
- each network admin may want to control routing in its own network

Hierarchical Routing

- aggregate routers into regions, “autonomous systems” (AS)
- routers in same AS run same routing protocol
  - » “intra-AS” routing protocol
  - » routers in different AS can run different intra-AS routing protocol

Gateway router

- Direct link to router in another AS

Interconnected ASes

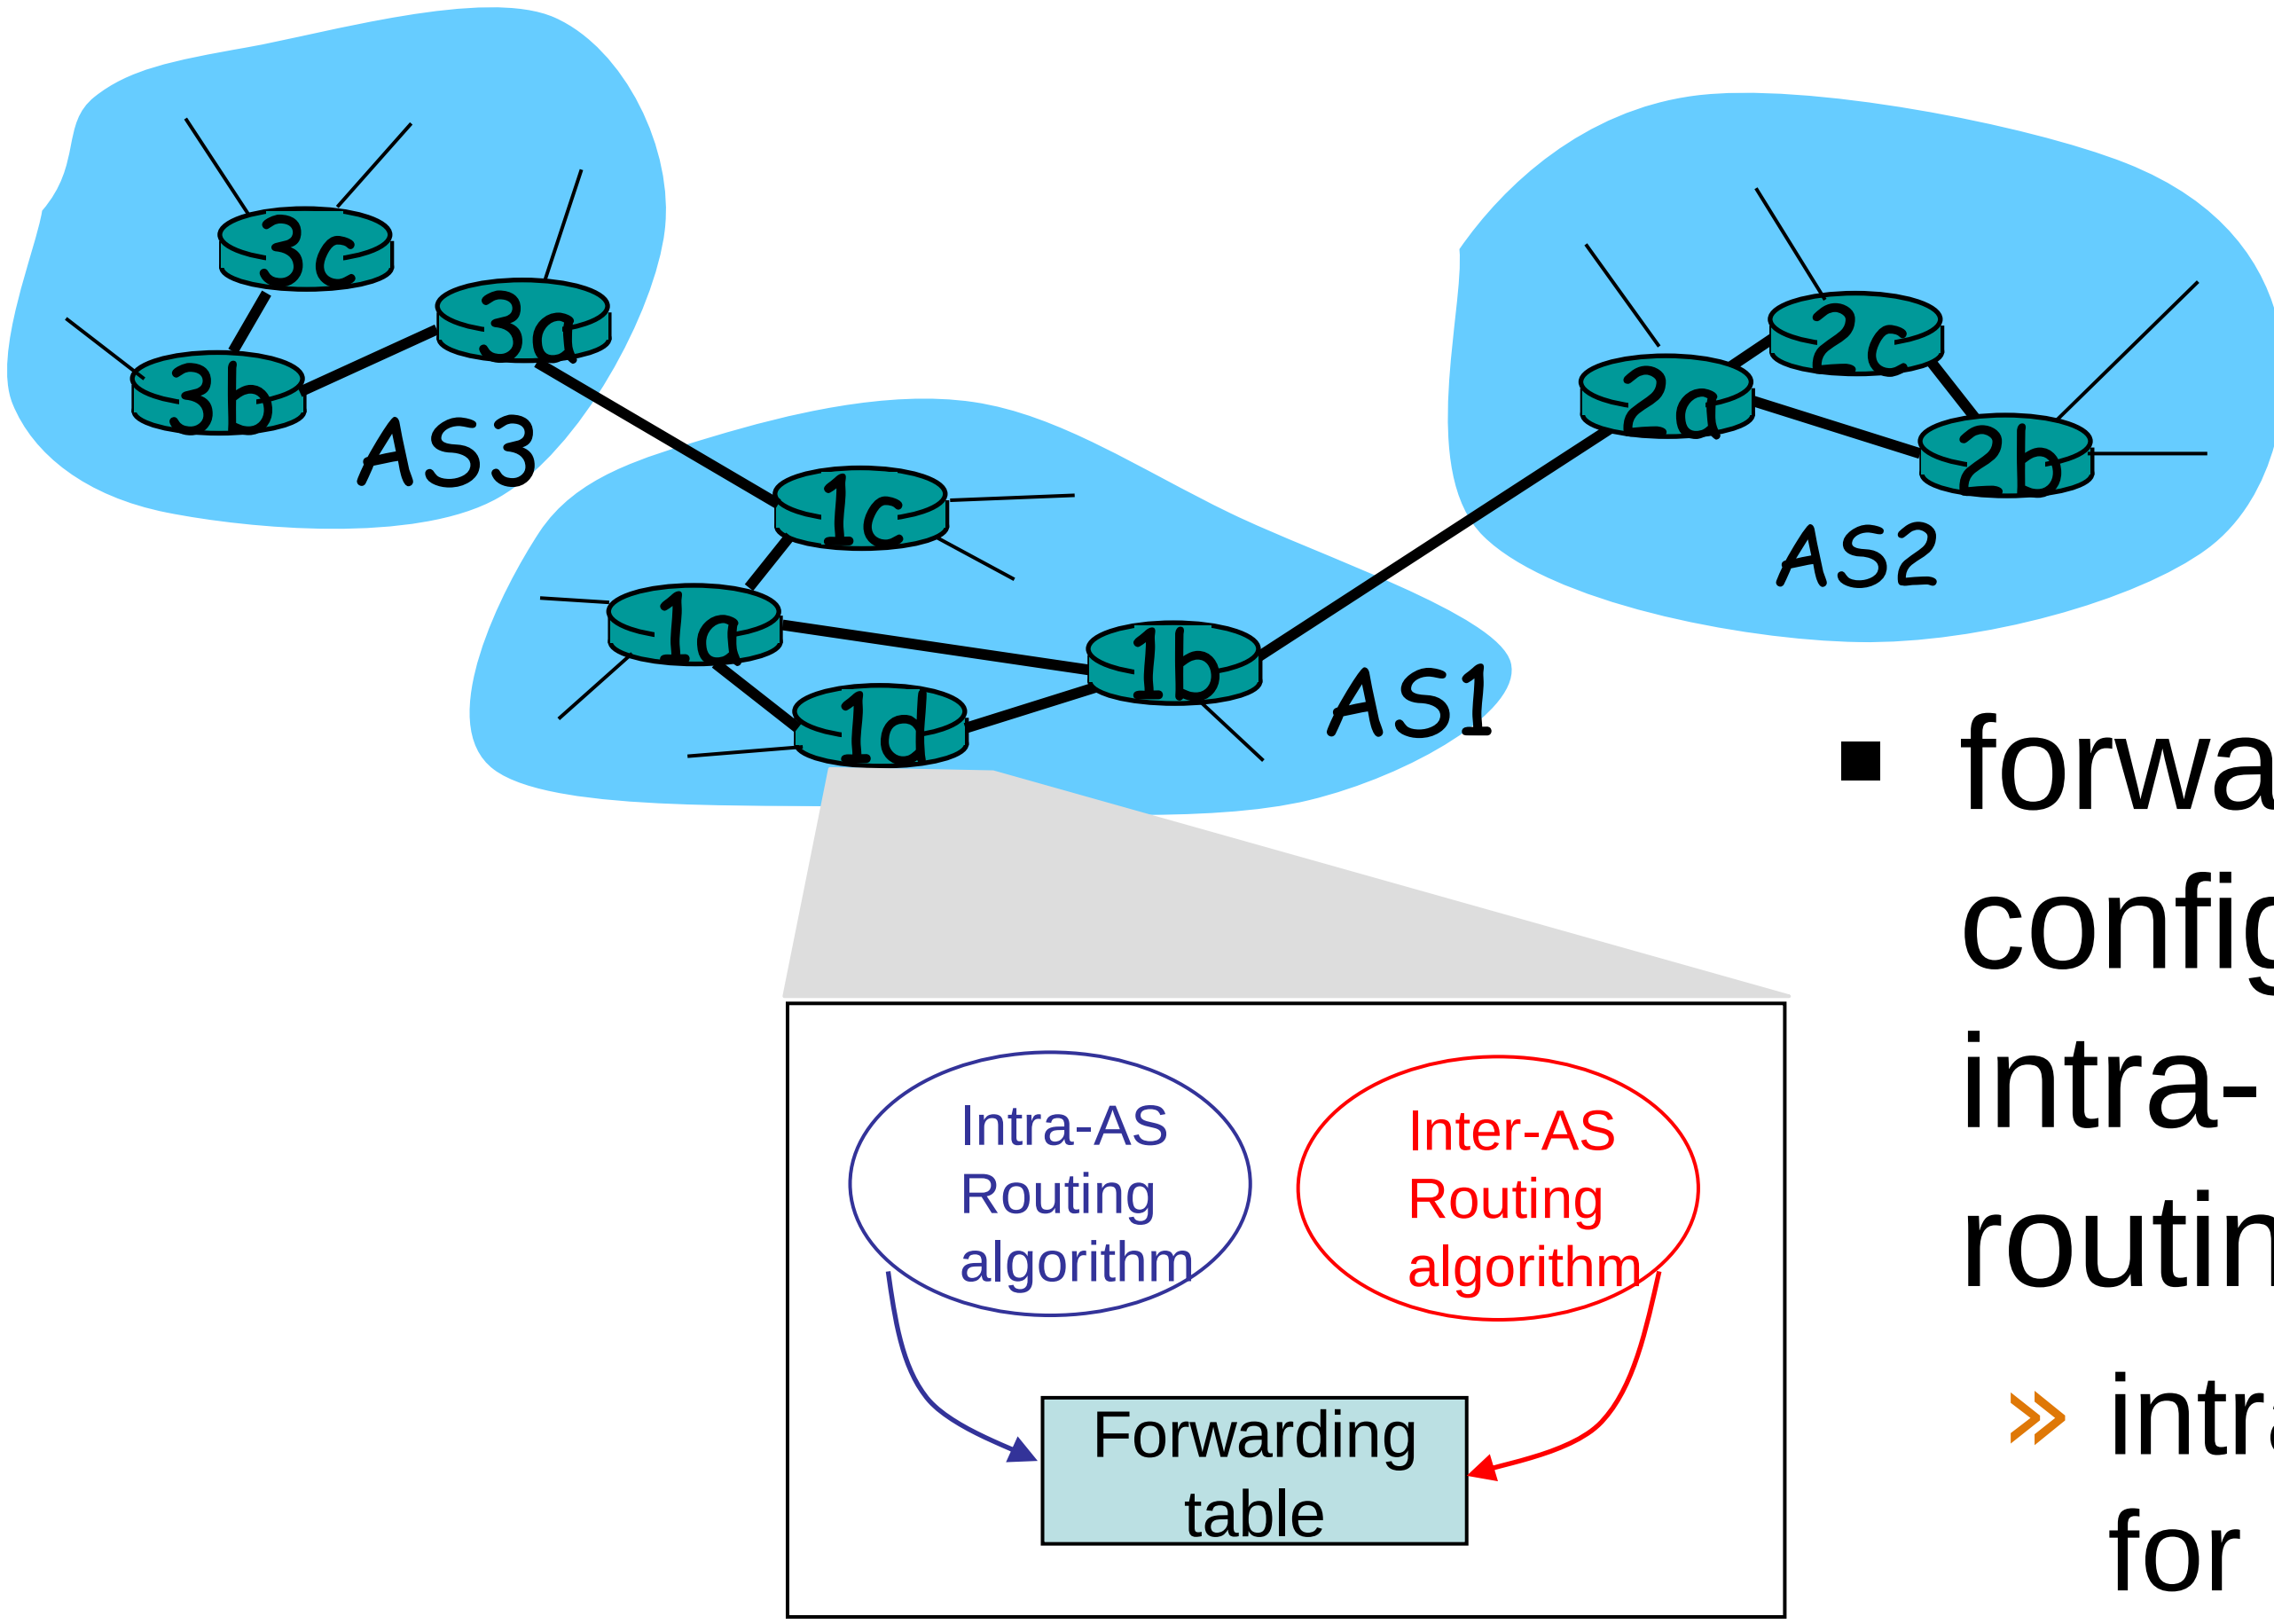

- forwarding table configured by both intra- and inter-AS routing algorithm
  - intra-AS sets entries for internal dests
  - inter-AS & intra-As sets entries for external dests

Inter-AS tasks

- suppose router in AS1 receives datagram destined outside of AS1:
  - router should forward packet to gateway router, but which one?

AS1 must:

1. learn which dests are reachable through AS2, which through AS3
2. propagate this reachability info to all routers in AS1

Job of inter-AS routing!

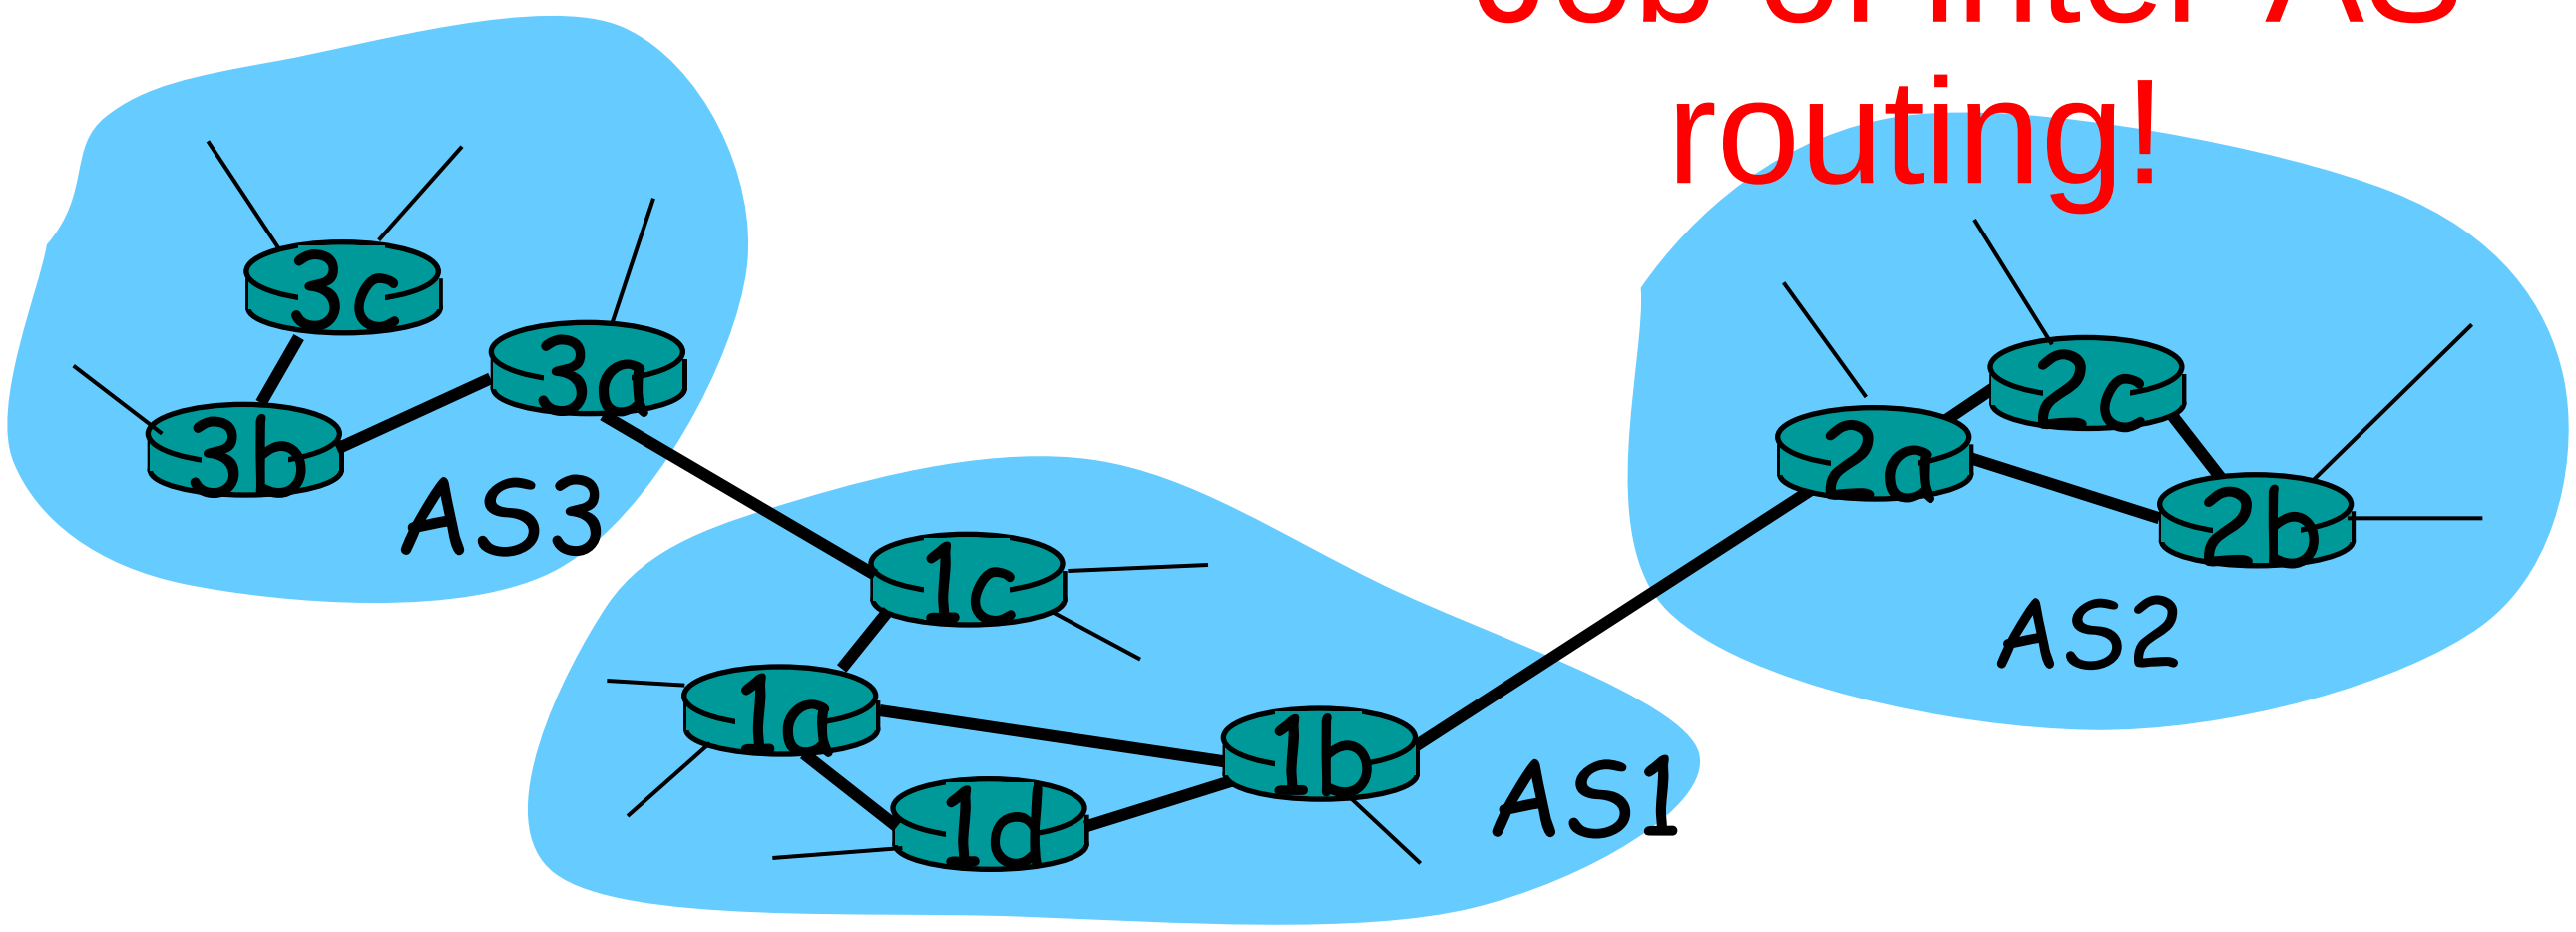

Example: Setting forwarding table in router 1d

- suppose AS1 learns (via inter-AS protocol) that subnet *x* reachable via AS3 (gateway 1c) but not via AS2.
- inter-AS protocol propagates reachability info to all internal routers.
- router 1d determines from intra-AS routing info that its interface *I* is on the least cost path to 1c.
  - installs forwarding table entry *(x,I)*

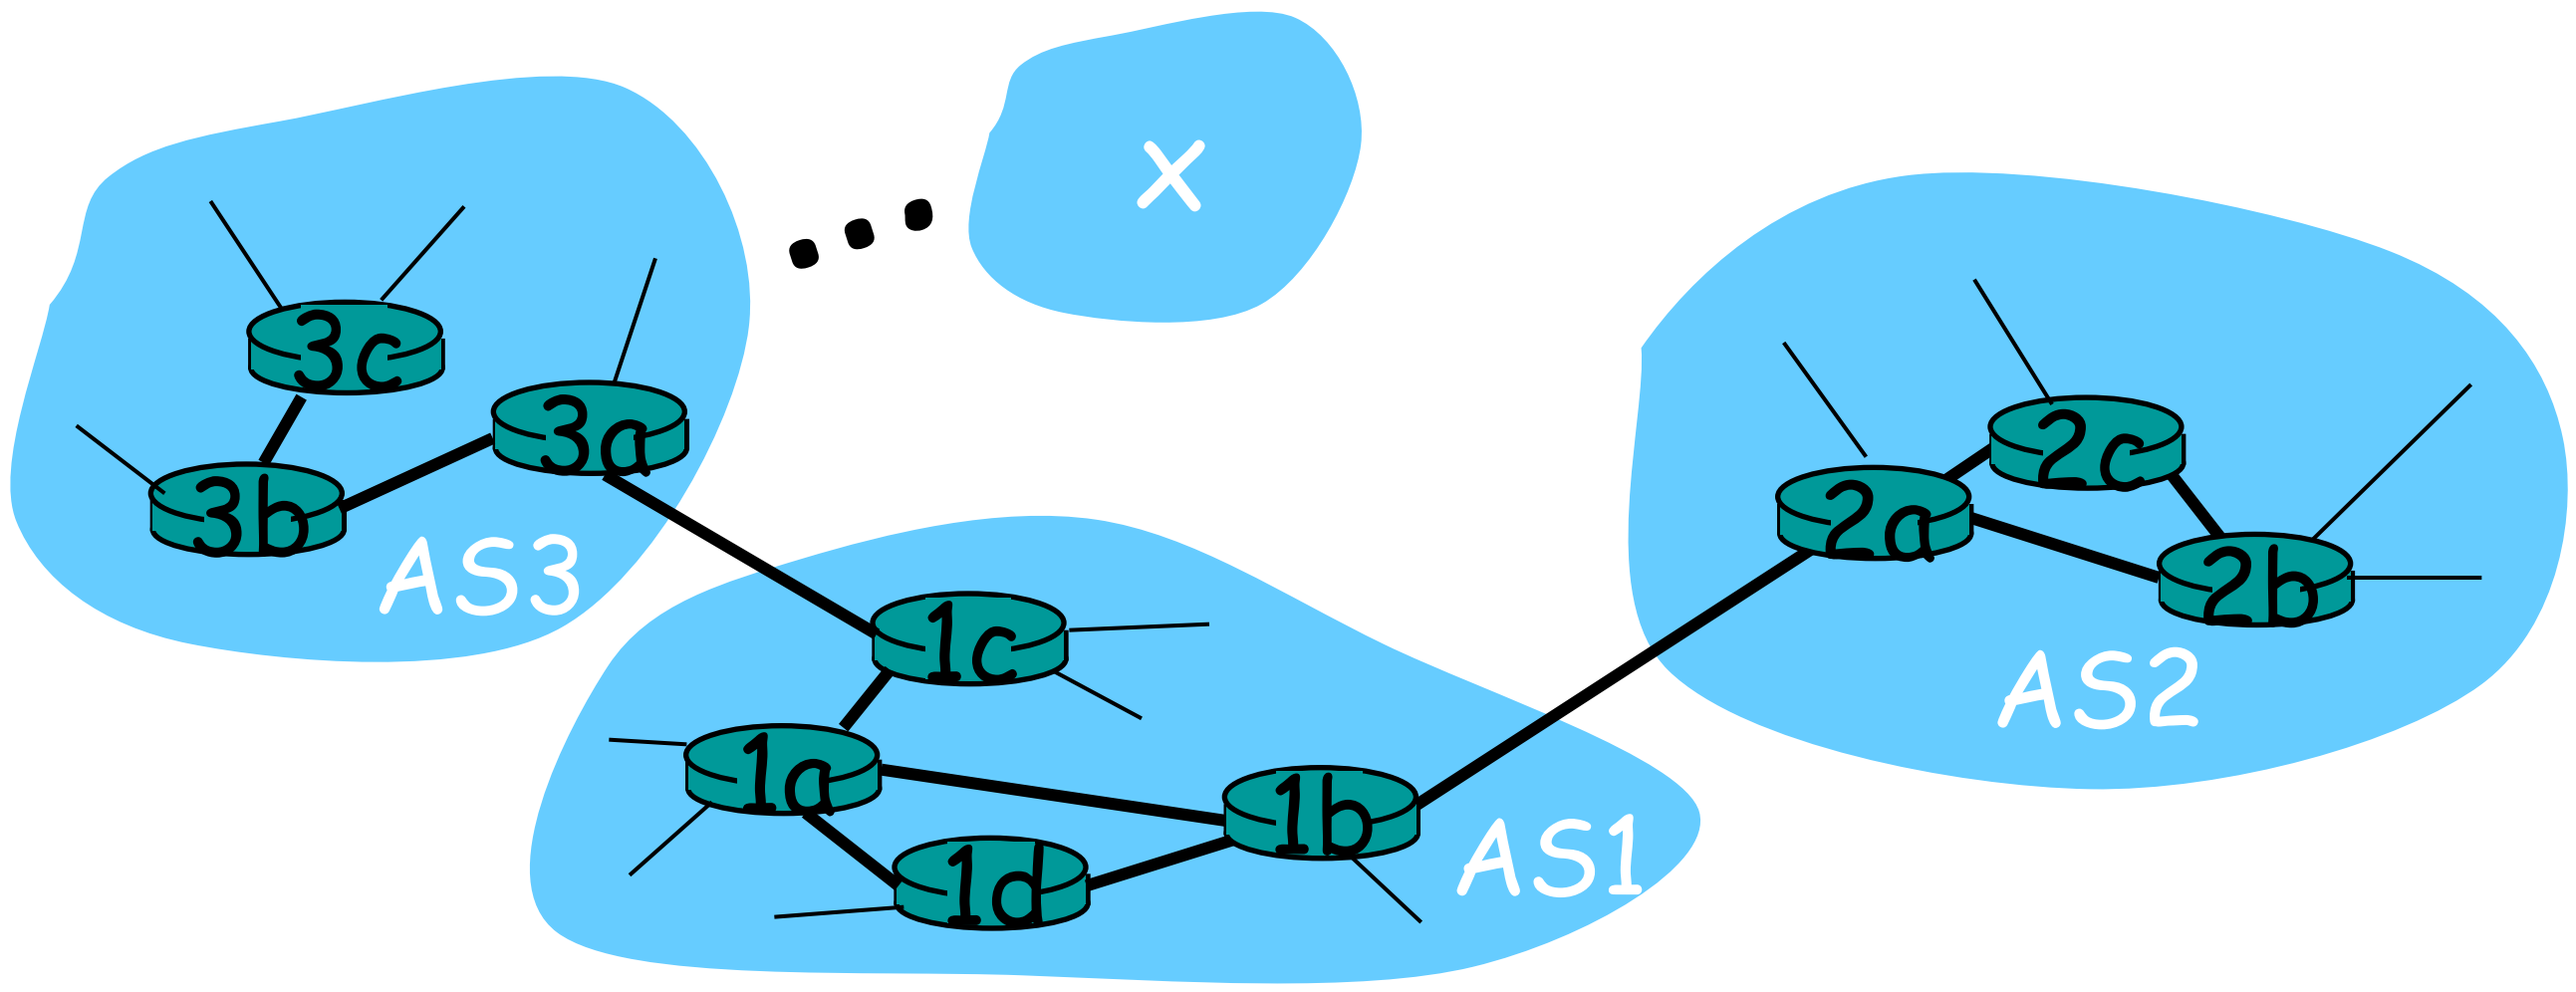

Example: Choosing among multiple ASes

- now suppose AS1 learns from inter-AS protocol that subnet *x* is reachable from AS3 *and* from AS2.
- to configure forwarding table, router 1d must determine towards which gateway it should forward packets for dest x.
  - this is also job of inter-AS routing protocol!

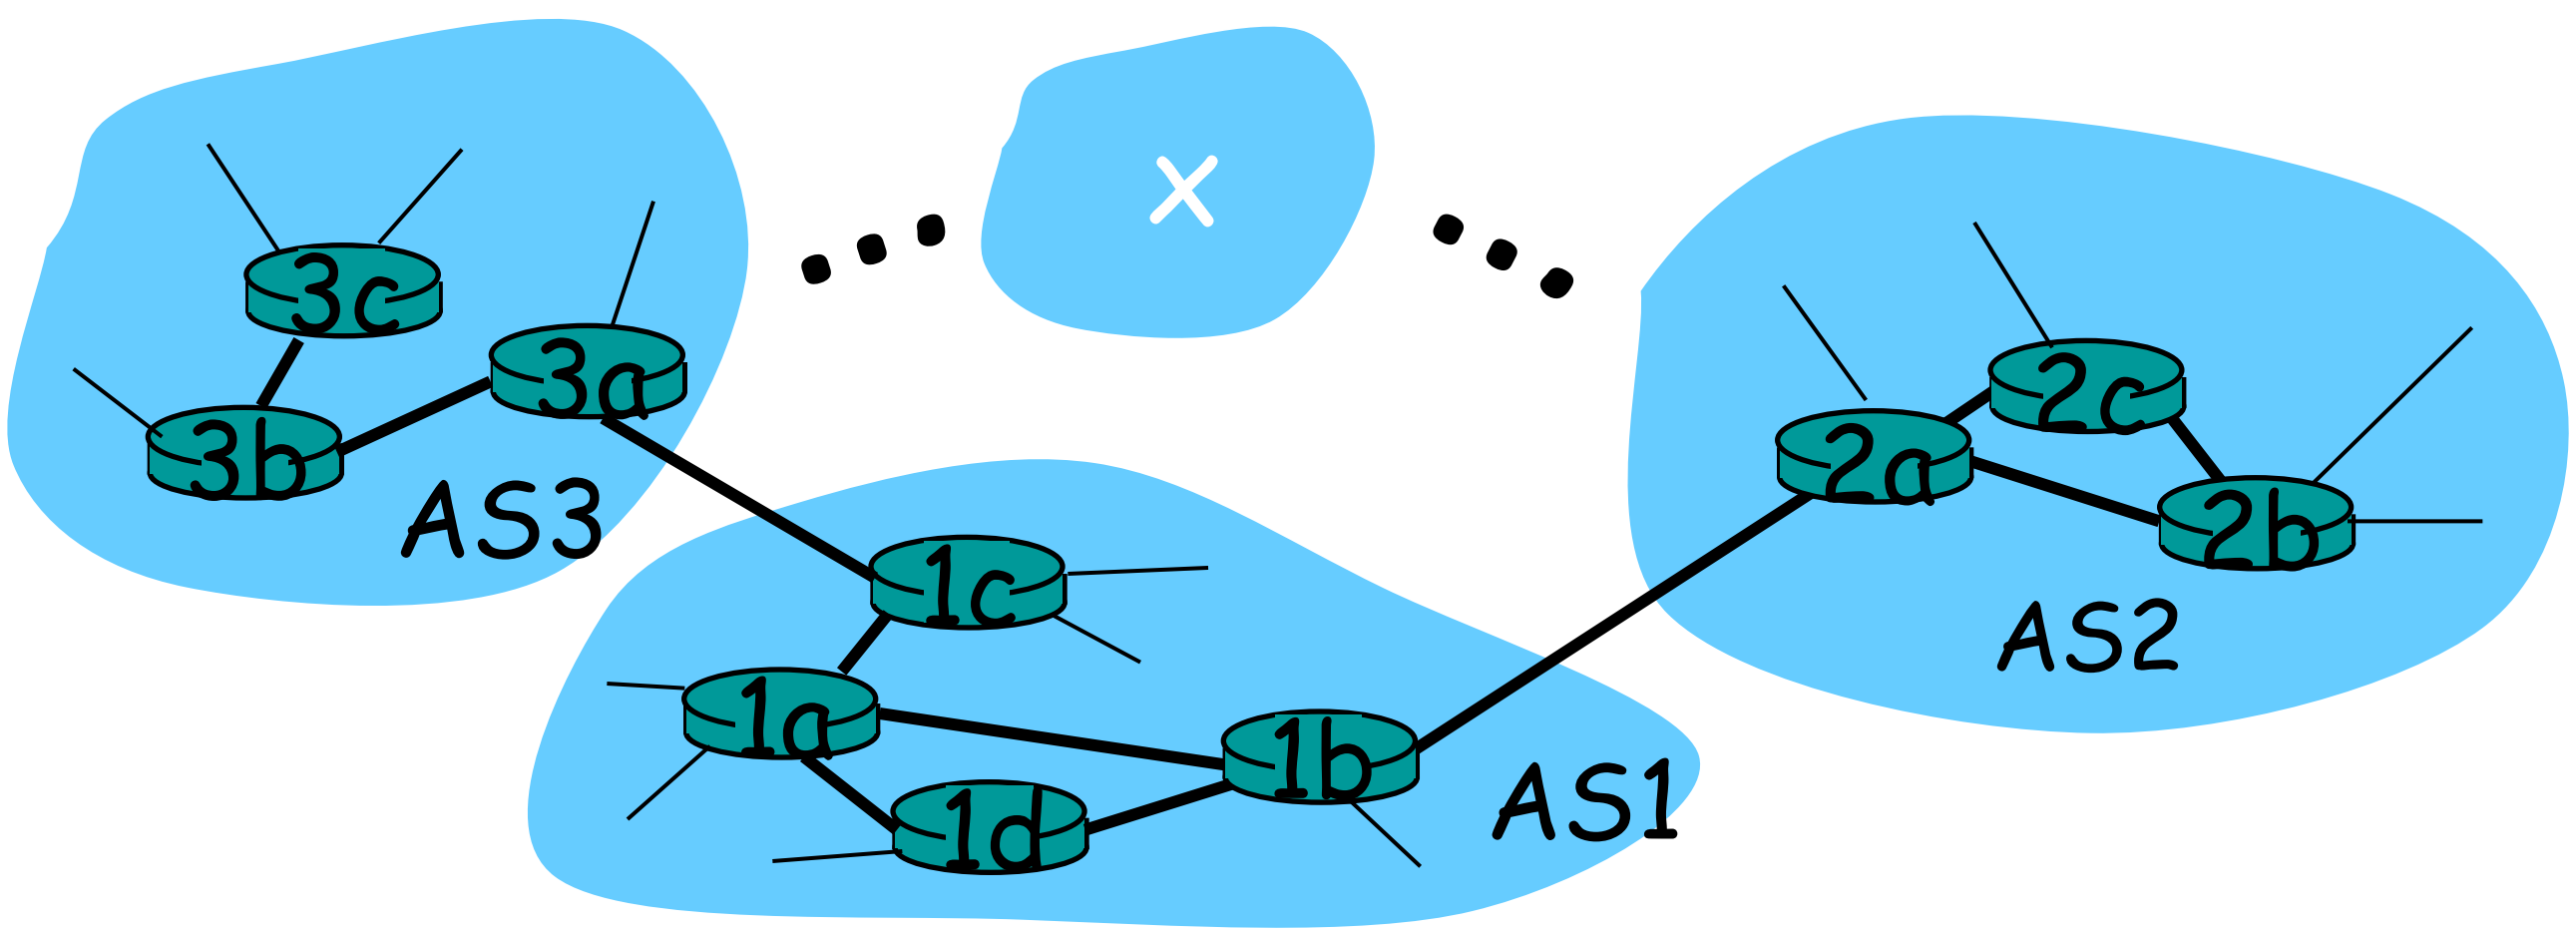

Example: Choosing among multiple ASes

- now suppose AS1 learns from inter-AS protocol that subnet *x* is reachable from AS3 *and* from AS2.
- to configure forwarding table, router 1d must determine towards which gateway it should forward packets for dest x.
  - » this is also job of inter-AS routing protocol!
- hot potato routing: send packet towards closest of two routers.

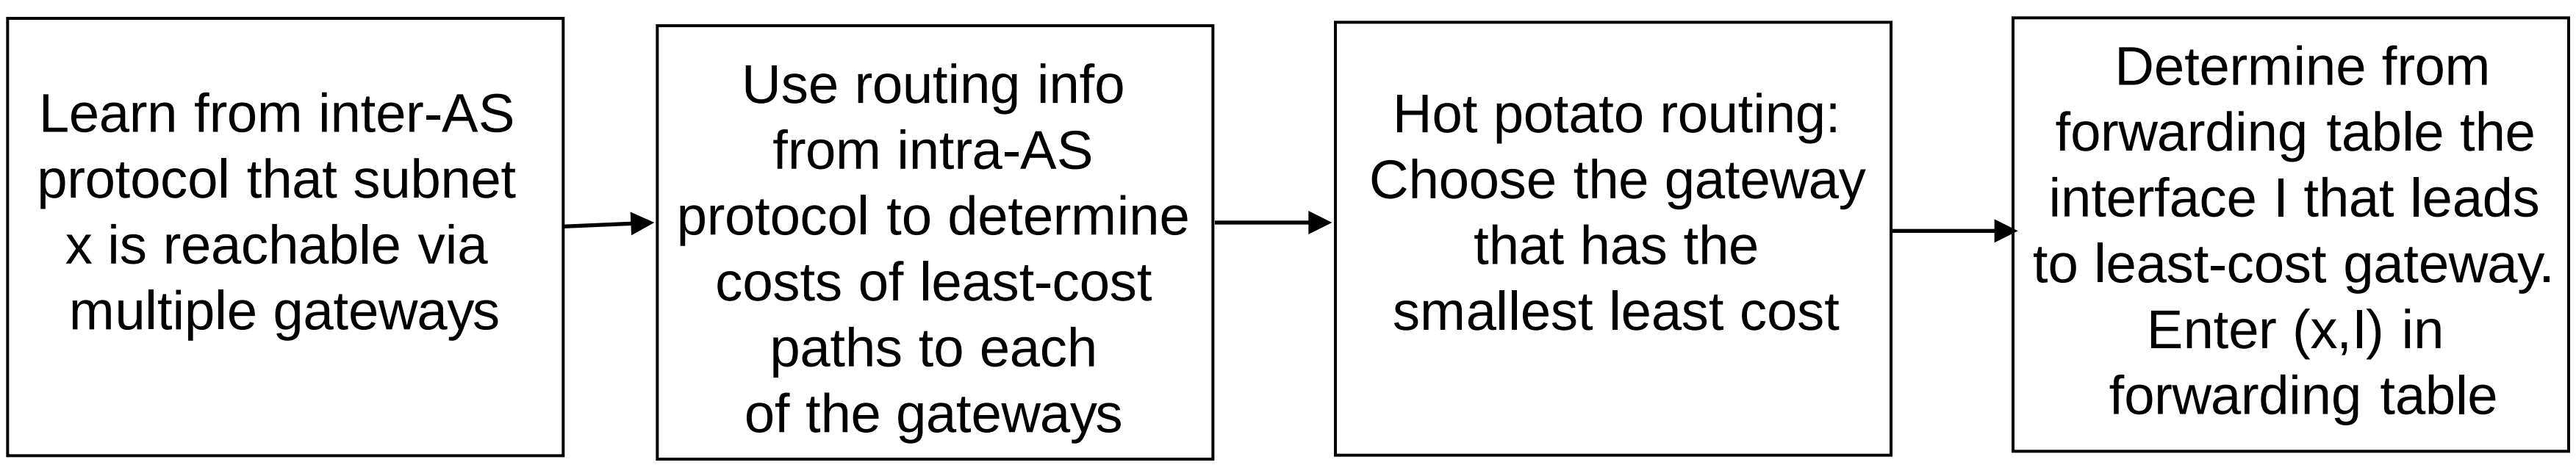

Networks Part 2 Session in Brief

- Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- Routing in the Internet
  - RIP
  - OSPF
  - BGP
- Broadcast and multicast routing

Intra-AS Routing

- also known as Interior Gateway Protocols (IGP)
- most common Intra-AS routing protocols:
  - RIP: Routing Information Protocol
  - OSPF: Open Shortest Path First
  - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

Networks Part 2 Session in Brief

- Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- Routing in the Internet
  - RIP
  - OSPF
  - BGP
- Broadcast and multicast routing

RIP (Routing Information Protocol)

- distance vector algorithm
- included in BSD-UNIX Distribution in 1982
- distance metric: # of hops (max = 15 hops)

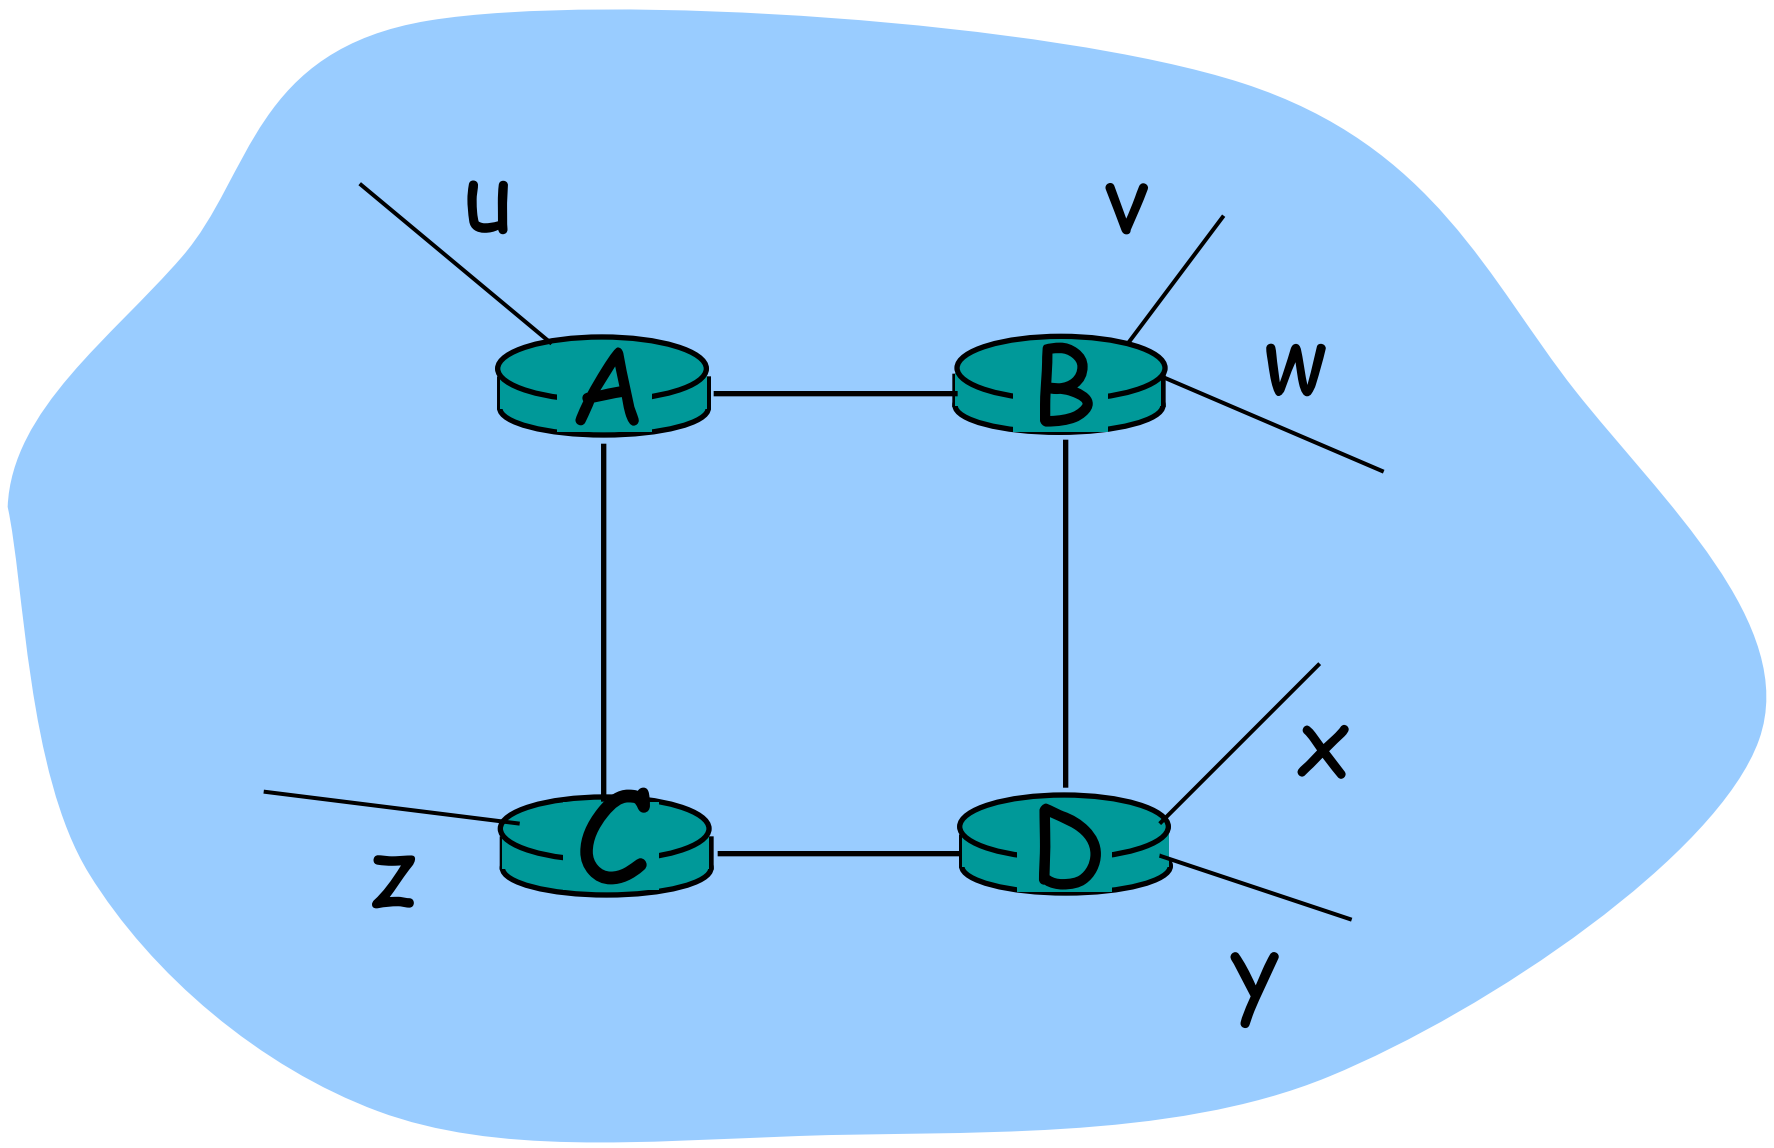

From router A to subnets:

destination	hops
u	1
v	2
w	2
x	3
y	3
z	2

RIP advertisements

- *distance vectors:* exchanged among neighbors every 30 sec via Response Message (also called advertisement)
- each advertisement: list of up to 25 destination subnets within AS

RIP: Example

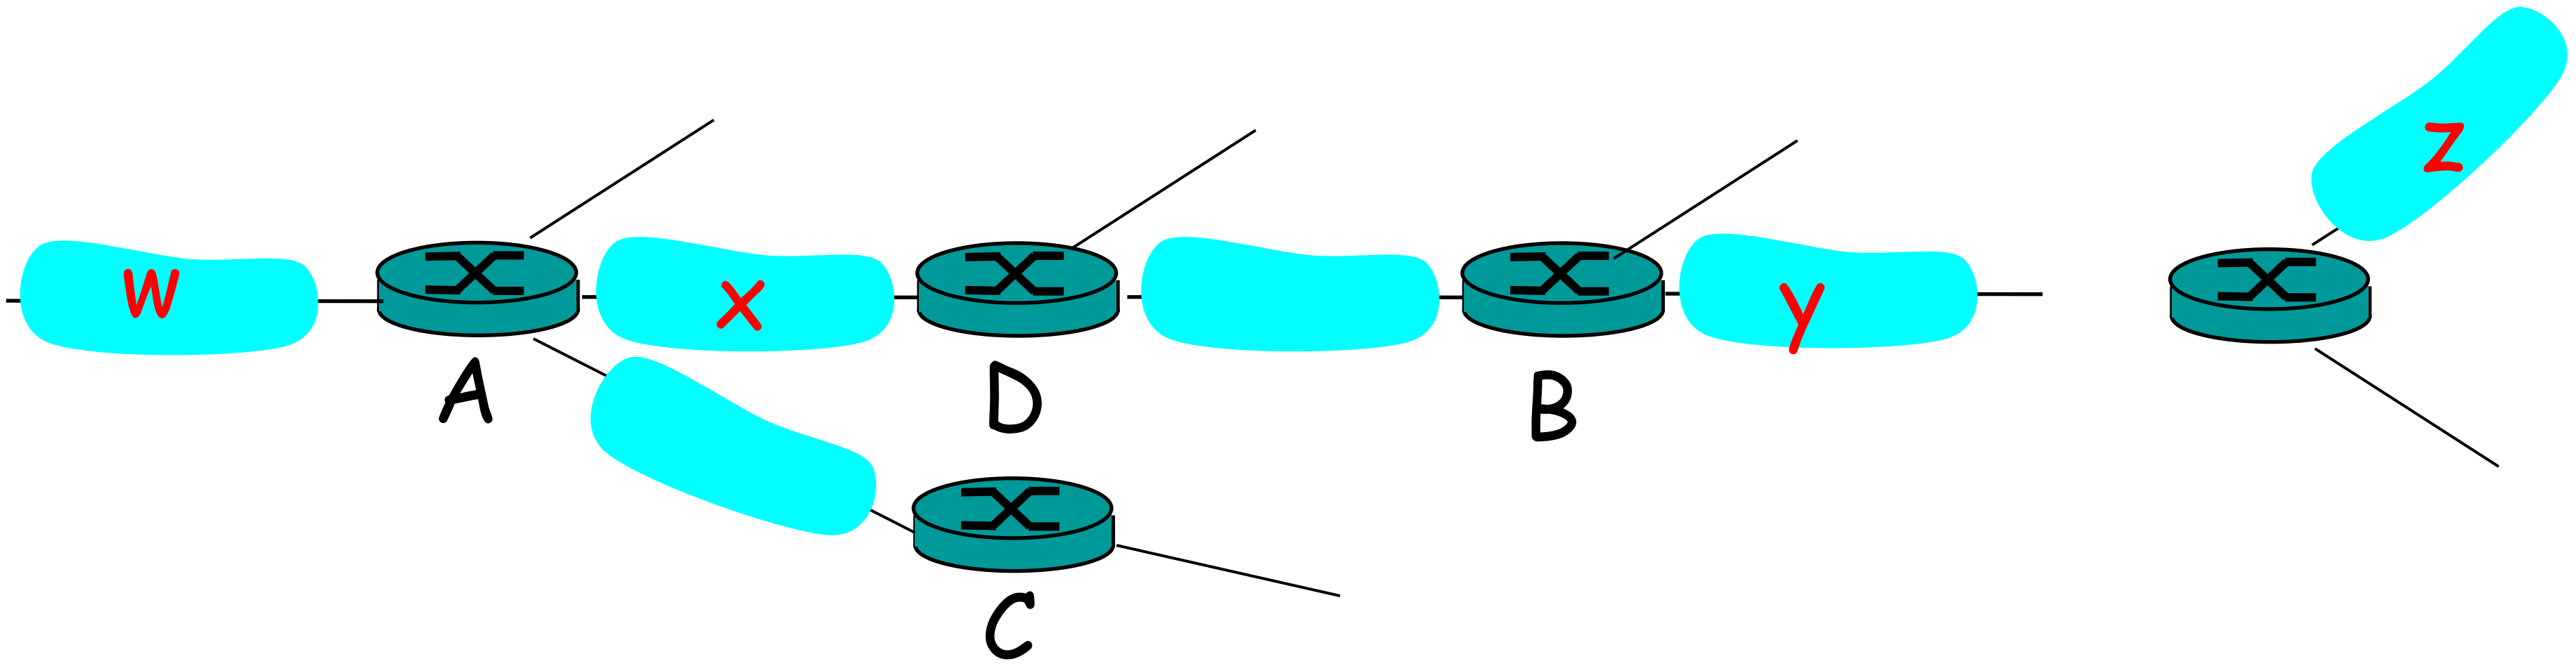

Destination Network	Next Router	Num. of hops to dest.
w	A	2
y	B	2
z	B	7
x	--	1
….	….	….

Routing/Forwarding table in D

RIP: Example

Dest	Next	hops
w	-	1
x	-	1
z	C	4
….	…	. . .

Advertisement from A to D

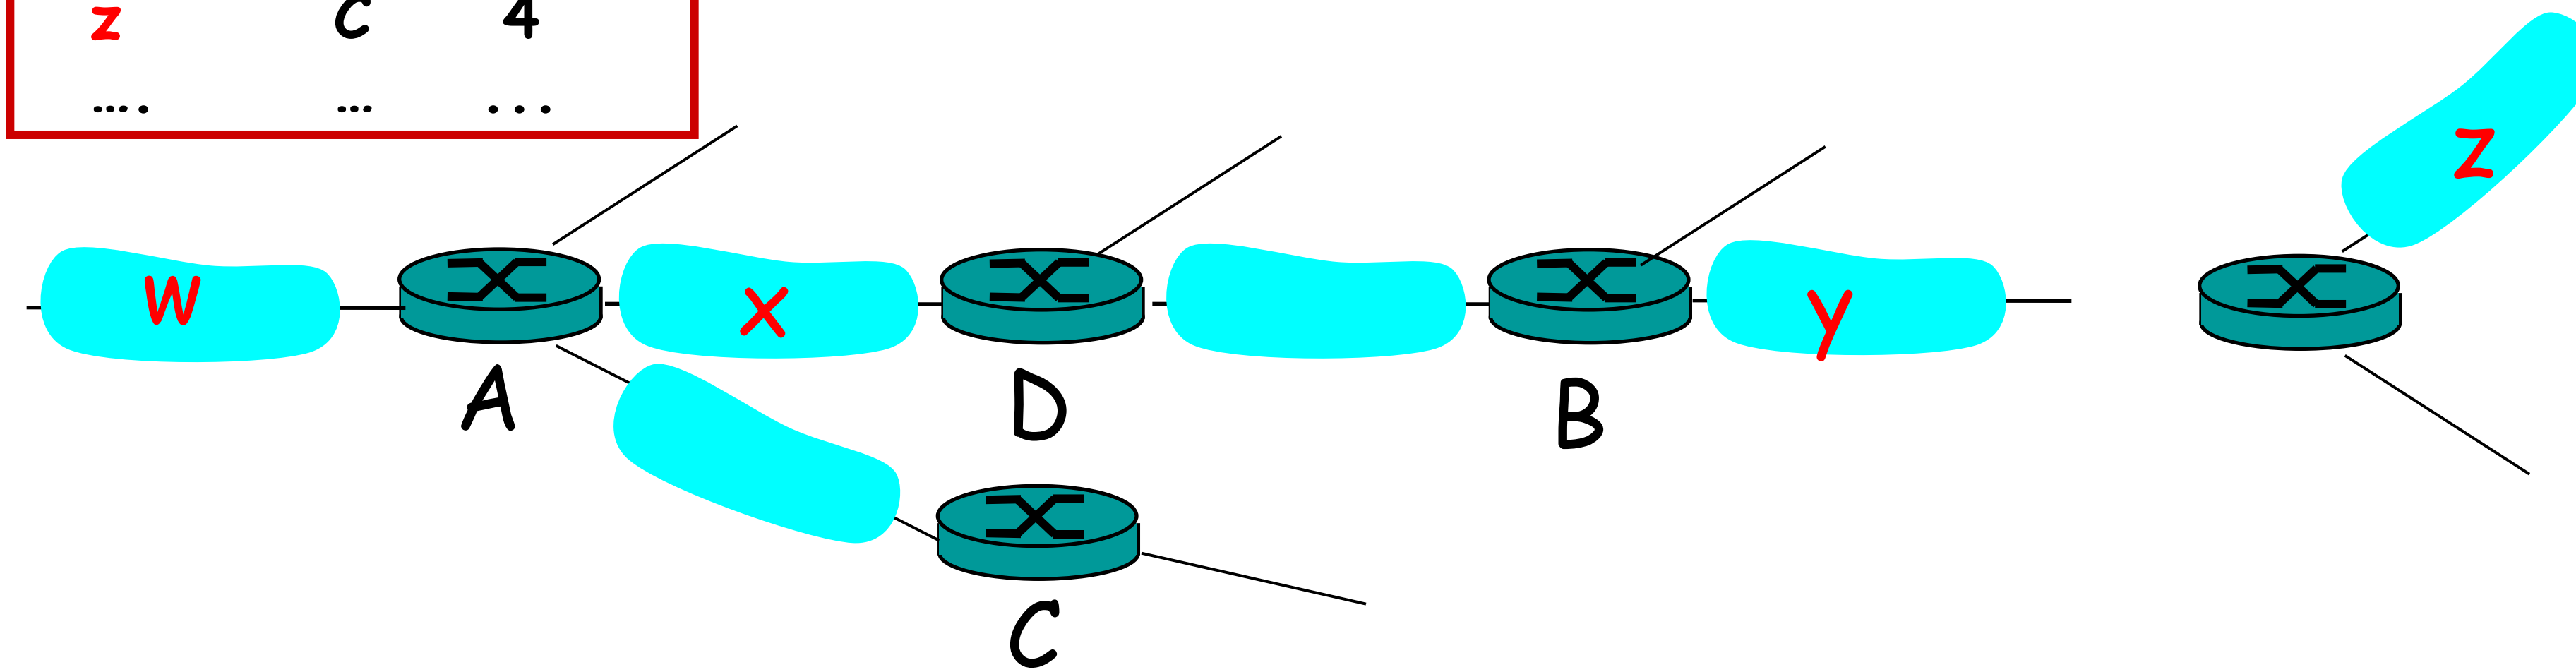

Destination Network	Next Router	Num. of hops to dest.
w	A	2
y	B	2
z	~~B~~ A	~~7~~ 5
x	--	1
….	….	. . . .

Routing/Forwarding table in D

RIP: Link Failure and Recovery

If no advertisement heard after 180 sec --> neighbor/link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
- neighbors in turn send out new advertisements (if tables changed)
- link failure info quickly (?) propagates to entire net
- *poison reverse* used to prevent ping-pong loops (infinite distance = 16 hops)

RIP Table processing

- RIP routing tables managed by **application-level** process called route-d (daemon)
- advertisements sent in UDP packets, periodically repeated

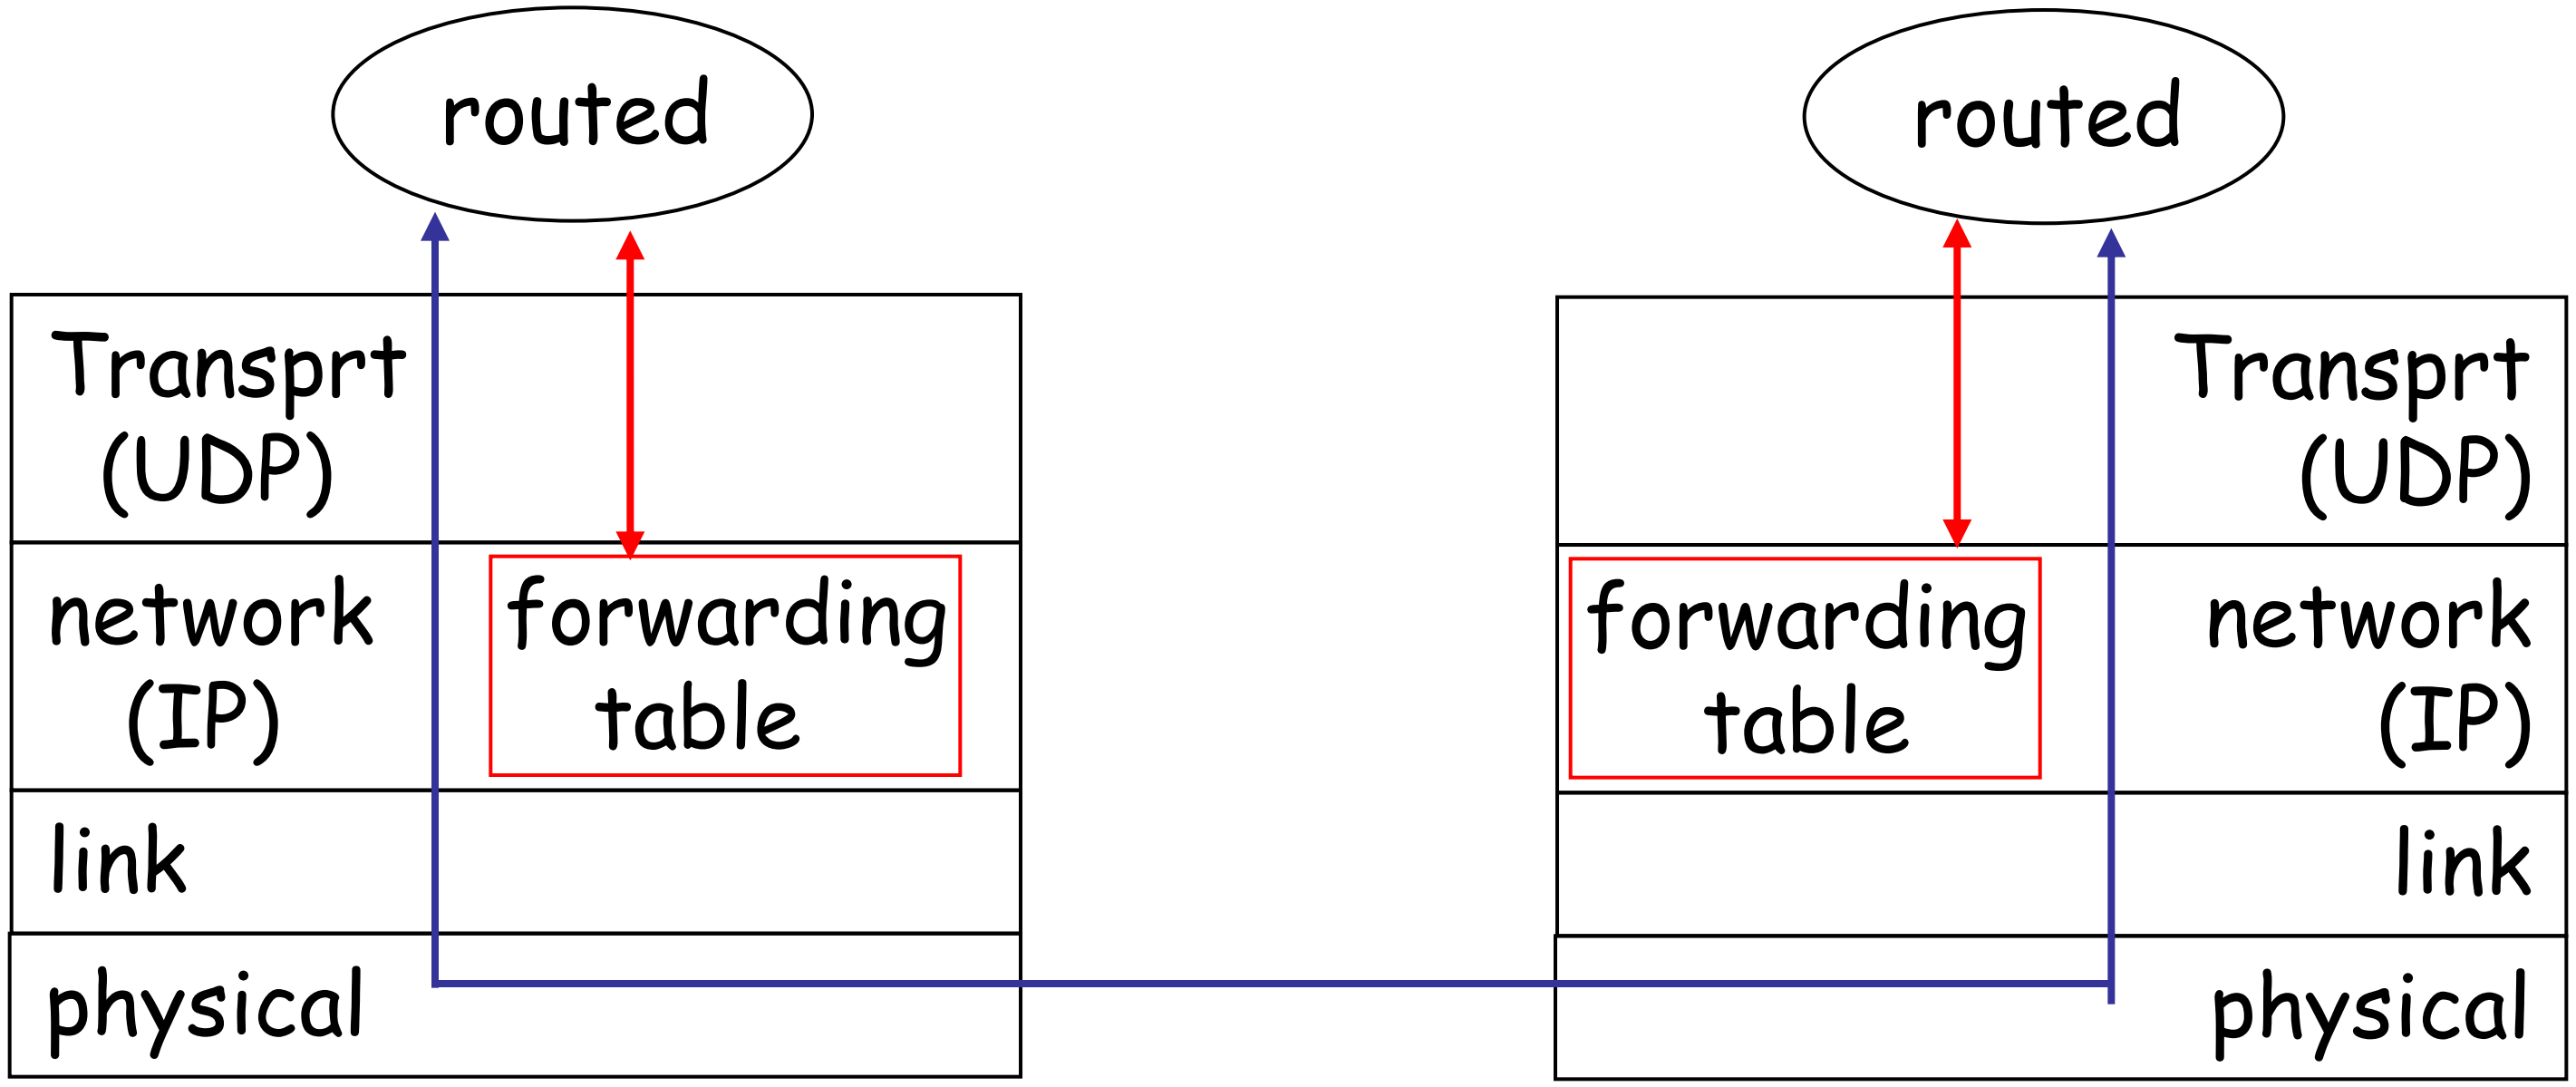

Networks Part 2 Session in Brief

- Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- Routing in the Internet
  - RIP
  - OSPF
  - BGP
- Broadcast and multicast routing

OSPF (Open Shortest Path First)

- "open": publicly available
- uses Link State algorithm
  - » LS packet dissemination
  - » topology map at each node
  - » route computation using Dijkstra's algorithm

- OSPF advertisement carries one entry per neighbor router
- advertisements disseminated to entire AS (via flooding)
  - » carried in OSPF messages directly over IP (rather than TCP or UDP

OSPF "advanced" features (not in RIP)

- security: all OSPF messages authenticated (to prevent malicious intrusion)
- multiple same-cost paths allowed (only one path in RIP)
- For each link, multiple cost metrics for different TOS (e.g., satellite link cost set "low" for best effort; high for real time)
- integrated uni- and multicast support:
  - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- hierarchical OSPF in large domains.

Hierarchical OSPF

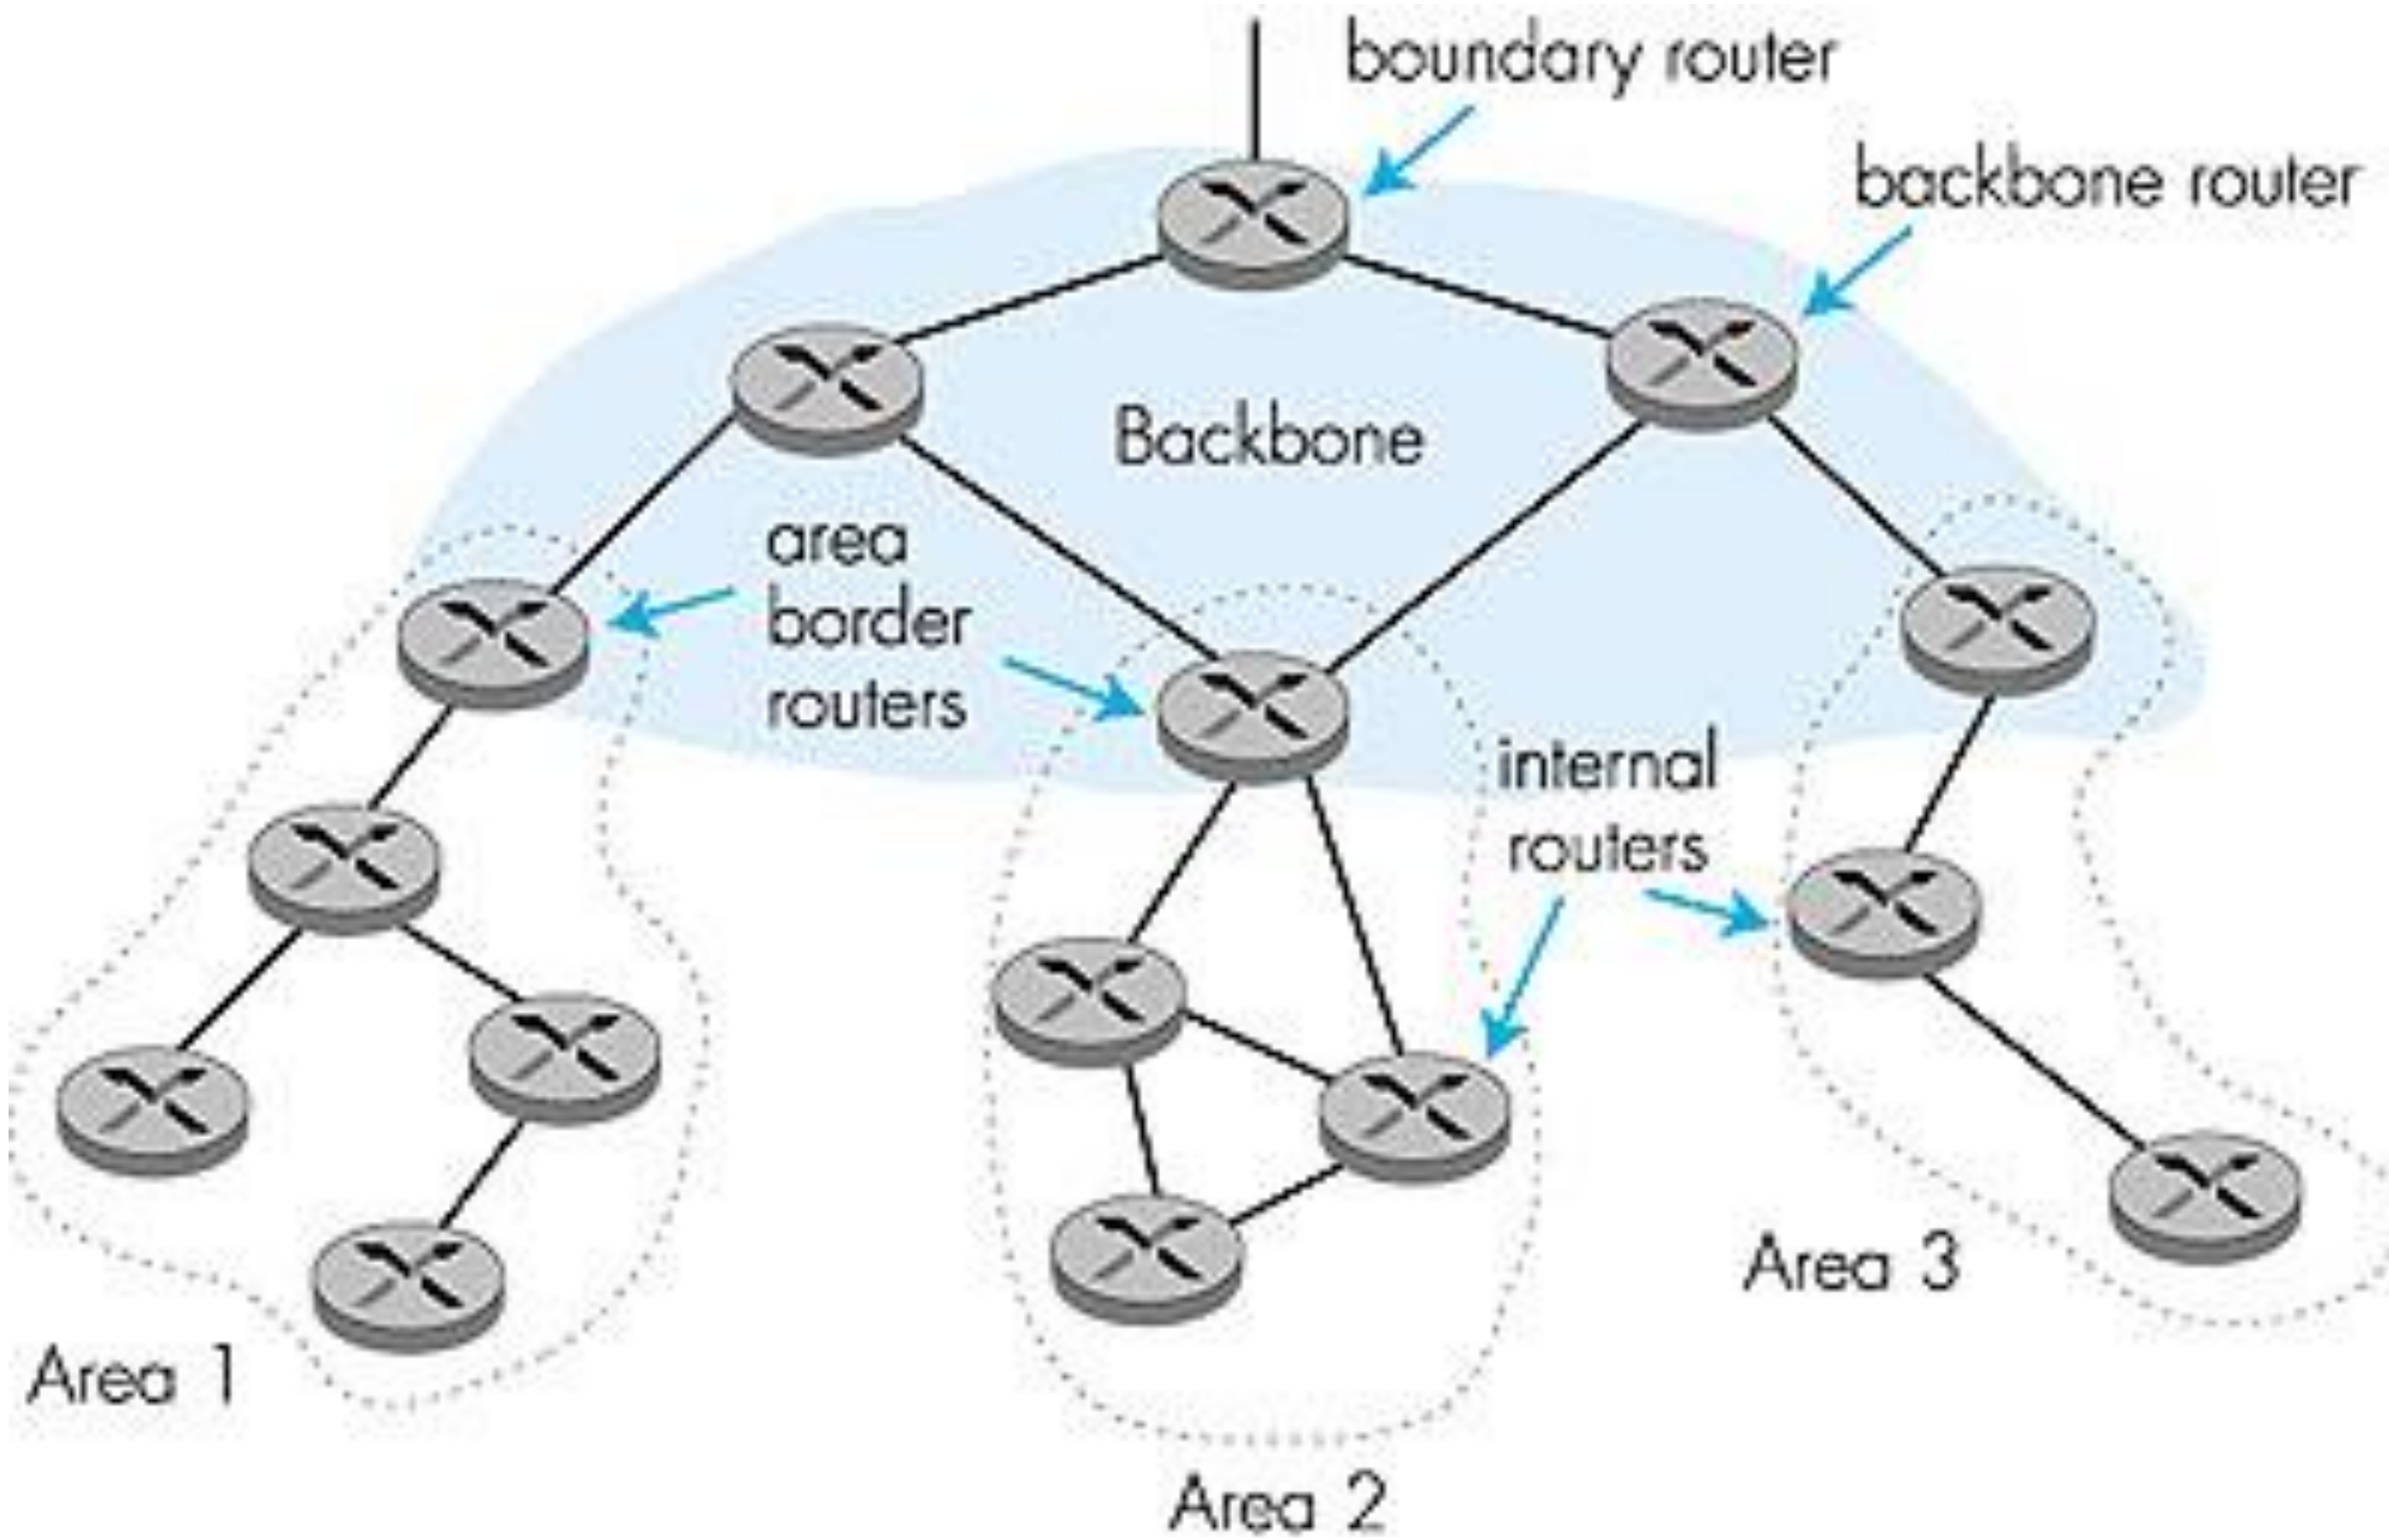

Hierarchical OSPF

- two-level hierarchy: local area, backbone.
  - » Link-state advertisements only in area
  - » each nodes has detailed area topology; only know direction (shortest path) to nets in other areas.
- *area border routers:* "summarize" distances to nets in own area, advertise to other Area Border routers.
- *backbone routers:* run OSPF routing limited to backbone.
- *boundary routers:* connect to other AS's.

Networks Part 2 Session in Brief

- Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- Routing in the Internet
  - RIP
  - OSPF
  - BGP
- Broadcast and multicast routing

Internet inter-AS routing: BGP

- BGP (Border Gateway Protocol): *the* de facto standard
- BGP provides each AS a means to:
  1. Obtain subnet reachability information from neighboring ASs.
  2. Propagate reachability information to all AS-internal routers.
  3. Determine "good" routes to subnets based on reachability information and policy.
- allows subnet to advertise its existence to rest of Internet: *"I am here"*

BGP basics

- pairs of routers (BGP peers) exchange routing info over semi-permanent TCP connections: BGP sessions
  - » BGP sessions need not correspond to physical links.
- when AS2 advertises a prefix to AS1:
  - » AS2 *promises* it will forward datagrams towards that prefix.
  - » AS2 can aggregate prefixes in its advertisement

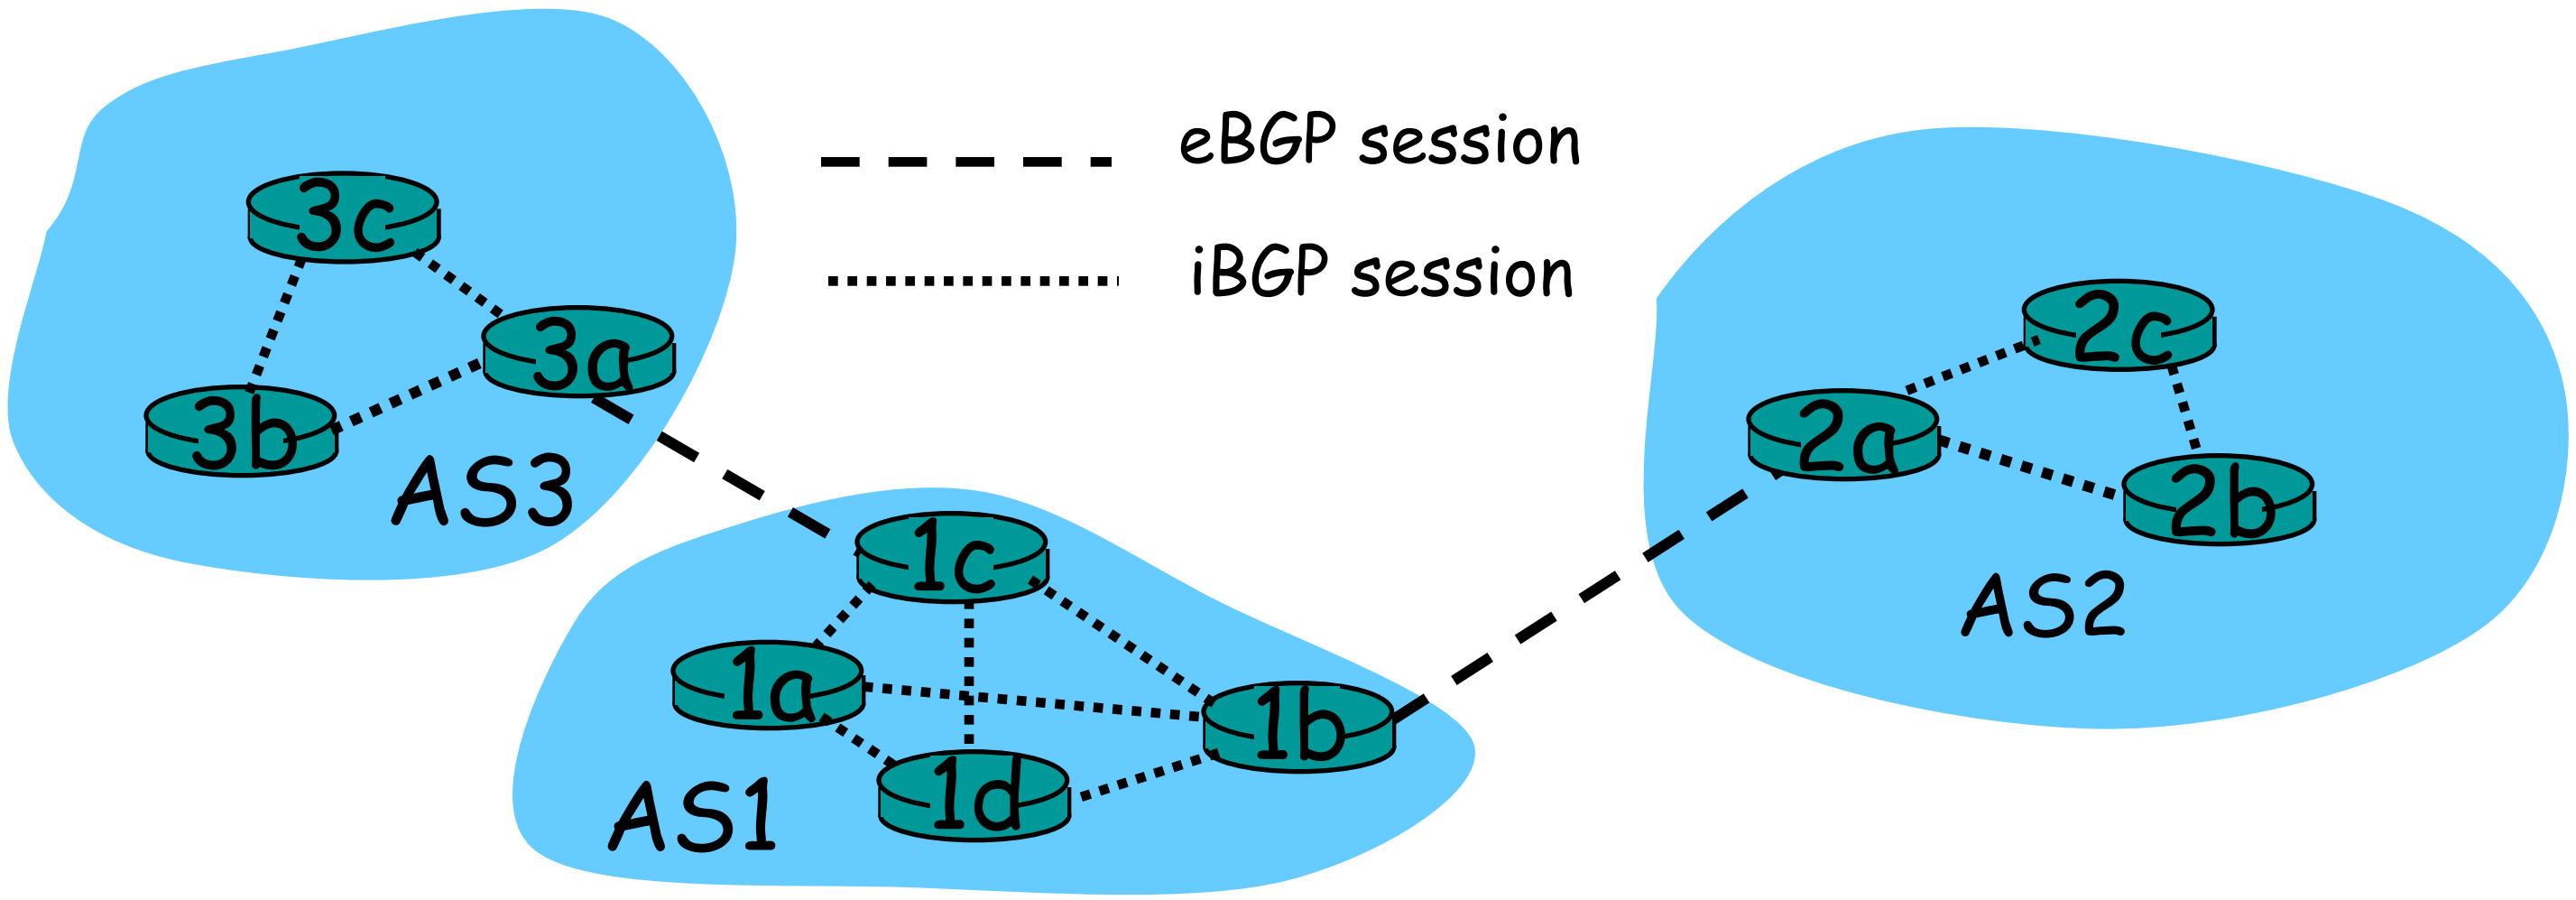

Distributing reachability info

- using eBGP session between 3a and 1c, AS3 sends prefix reachability info to AS1.
  - » 1c can then use iBGP do distribute new prefix info to all routers in AS1
  - » 1b can then re-advertise new reachability info to AS2 over 1b-to-2a eBGP session
- when router learns of new prefix, it creates entry for prefix in its forwarding table.

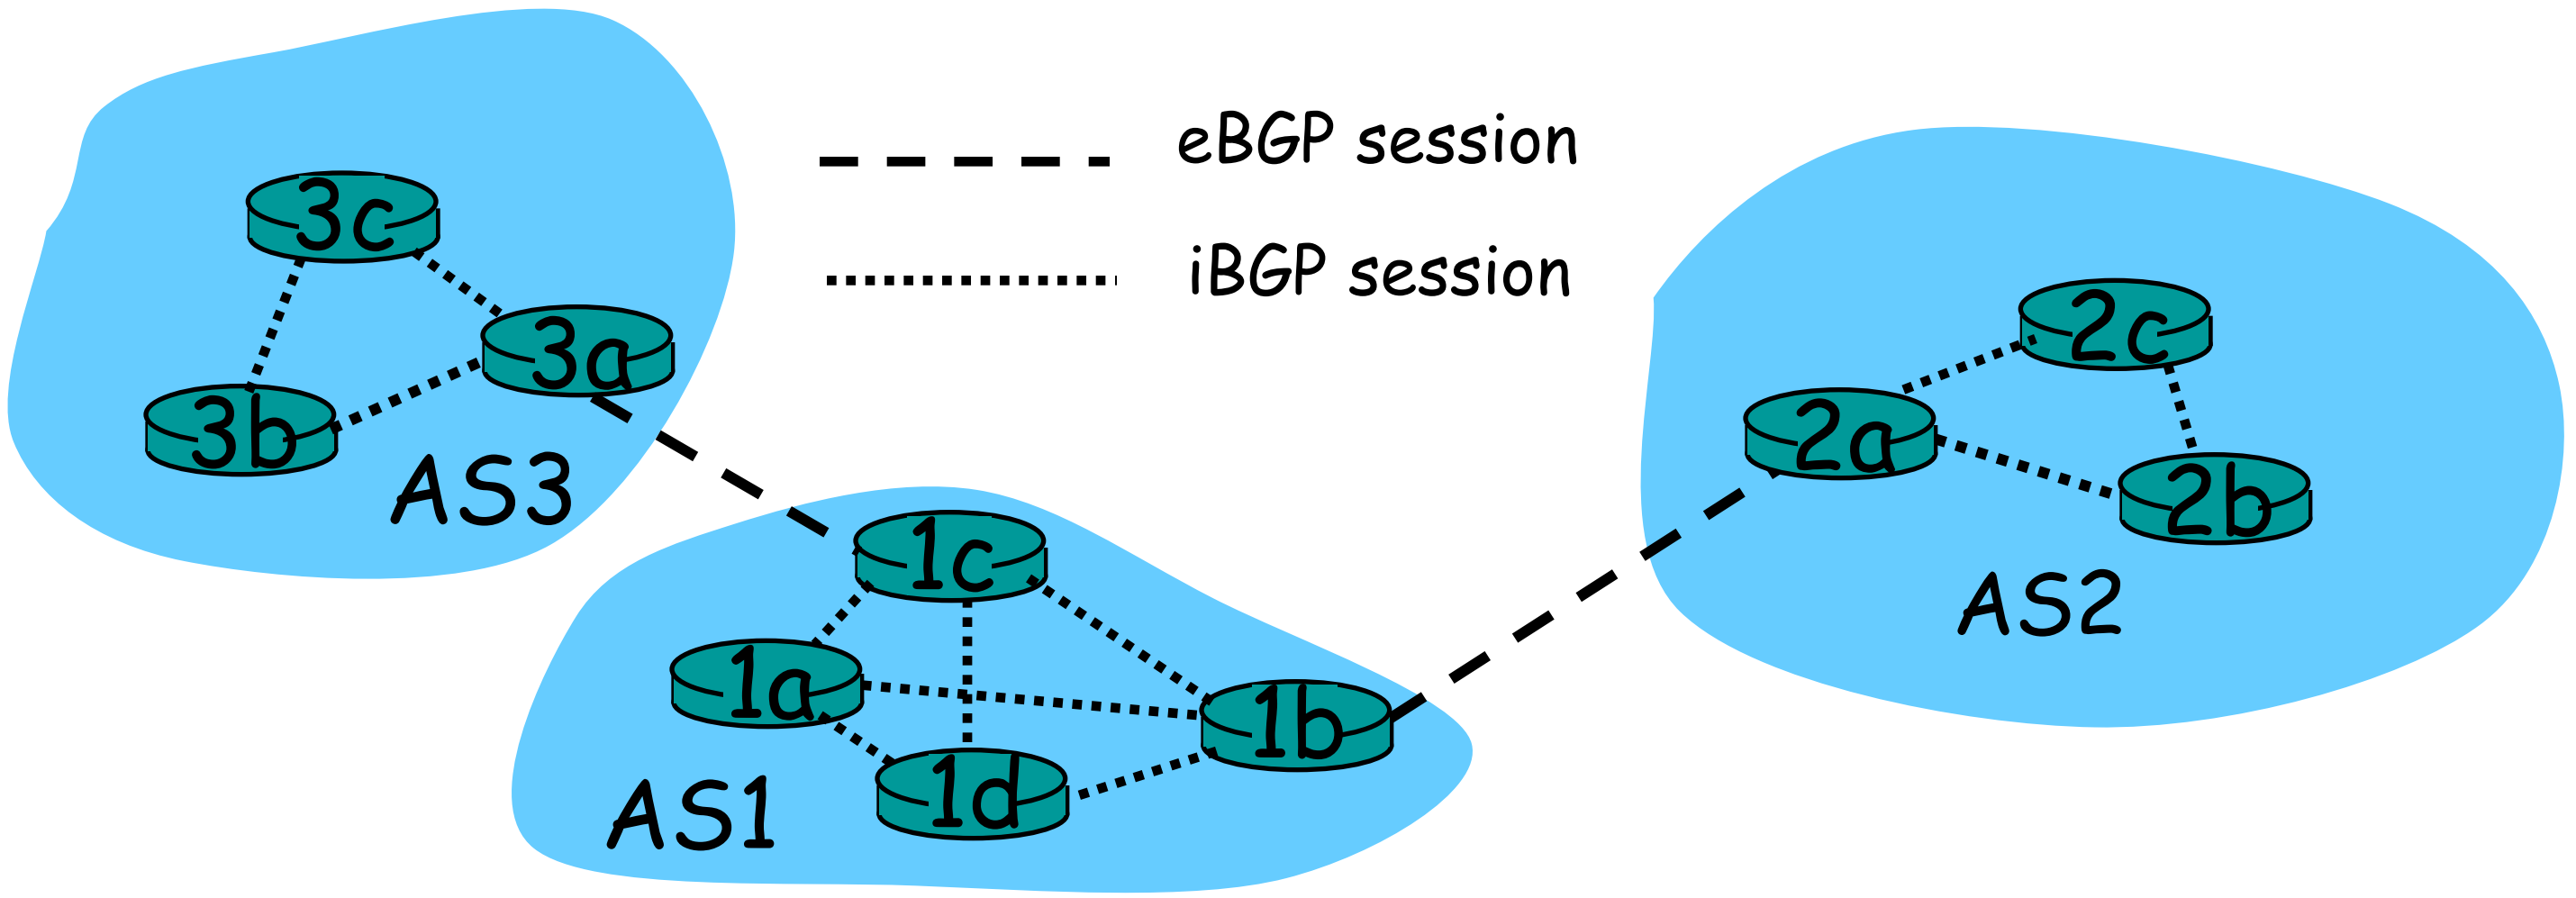

Path attributes & BGP routes

- advertised prefix includes BGP attributes.
  - prefix + attributes = “route”
- two important attributes:
  - AS-PATH: contains ASs through which prefix advertisement has passed: e.g, AS 67, AS 17
  - NEXT-HOP: indicates specific internal-AS router to next-hop AS. (may be multiple links from current AS to next-hop-AS)
- when gateway router receives route advertisement, uses import policy to accept/decline.

BGP route selection

- router may learn about more than 1 route to some prefix. Router must select route.
- elimination rules:
  1. local preference value attribute: policy decision
  2. shortest AS-PATH
  3. closest NEXT-HOP router: hot potato routing
  4. additional criteria

BGP messages

- BGP messages exchanged using TCP.
- BGP messages:
  - OPEN: opens TCP connection to peer and authenticates sender
  - UPDATE: advertises new path (or withdraws old)
  - KEEPALIVE keeps connection alive in absence of UPDATES; also ACKs OPEN request
  - NOTIFICATION: reports errors in previous msg; also used to close connection

BGP routing policy

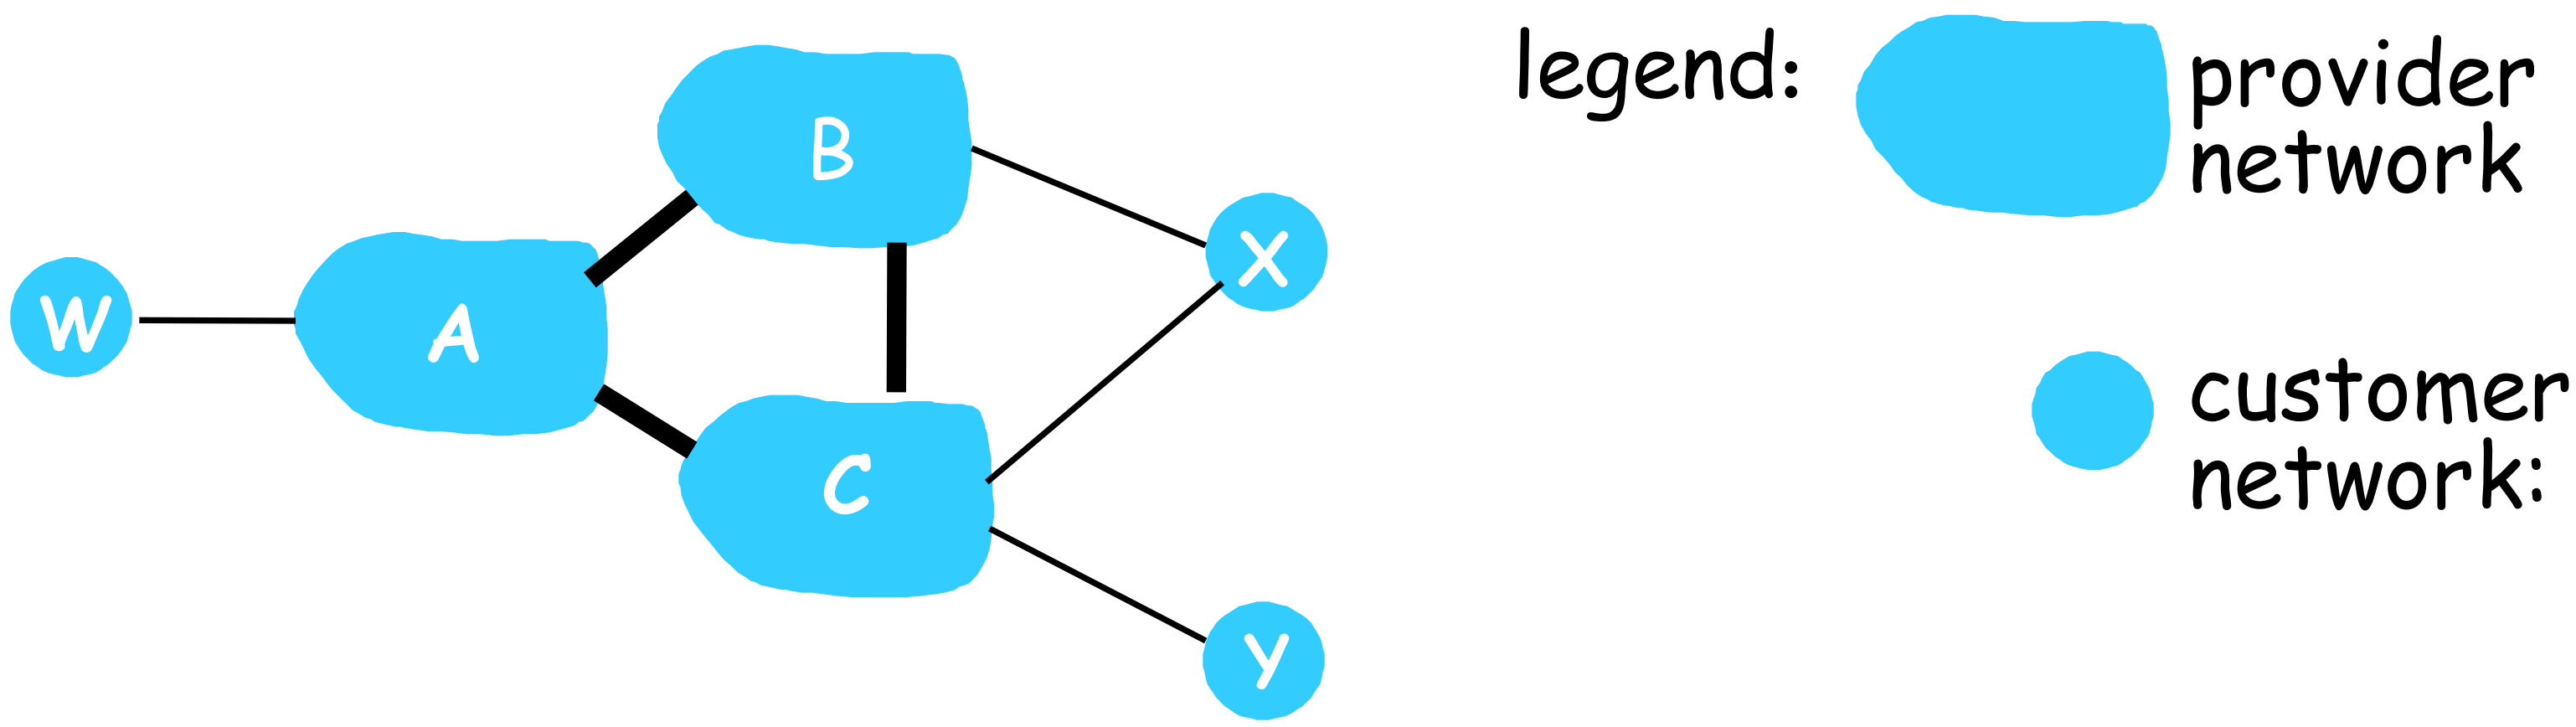

- A,B,C are provider networks
- X,W,Y are customer (of provider networks)
- X is dual-homed: attached to two networks
  - X does not want to route from B via X to C
  - .. so X will not advertise to B a route to C

BGP routing policy (2)

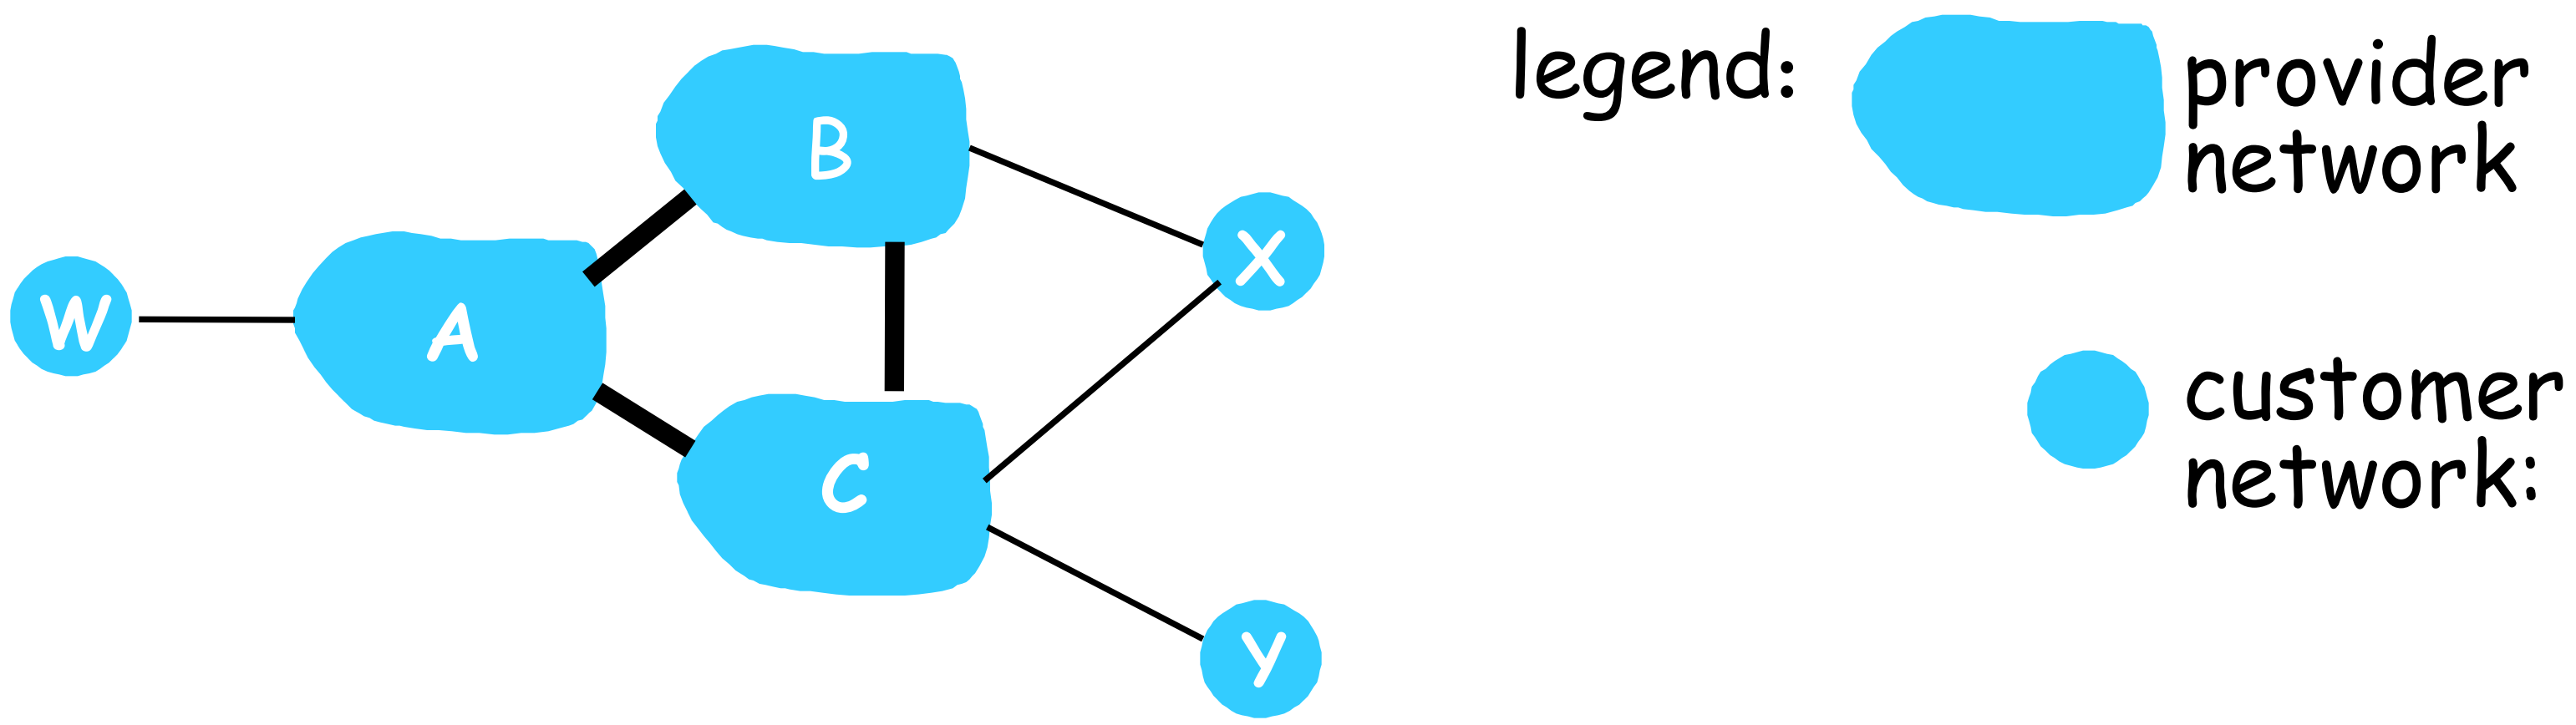

- A advertises path AW to B
- B advertises path BAW to X
- Should B advertise path BAW to C?
  - » No way! B gets no “revenue” for routing CBAW since neither W nor C are B’s customers
  - » B wants to force C to route to w via A
  - » B wants to route *only* to/from its customers!

Why different Intra- and Inter-AS routing ?

Policy:

- Inter-AS: admin wants control over how its traffic routed, who routes through its net.
- Intra-AS: single admin, so no policy decisions needed

Scale:

- hierarchical routing saves table size, reduced update traffic

Performance:

- Intra-AS: can focus on performance
- Inter-AS: policy may dominate over performance

Networks Part 2 Session in Brief

- Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- Routing in the Internet
  - RIP
  - OSPF
  - BGP
- Broadcast and multicast routing

Broadcast Routing

- deliver packets from source to all other nodes
- source duplication is inefficient:

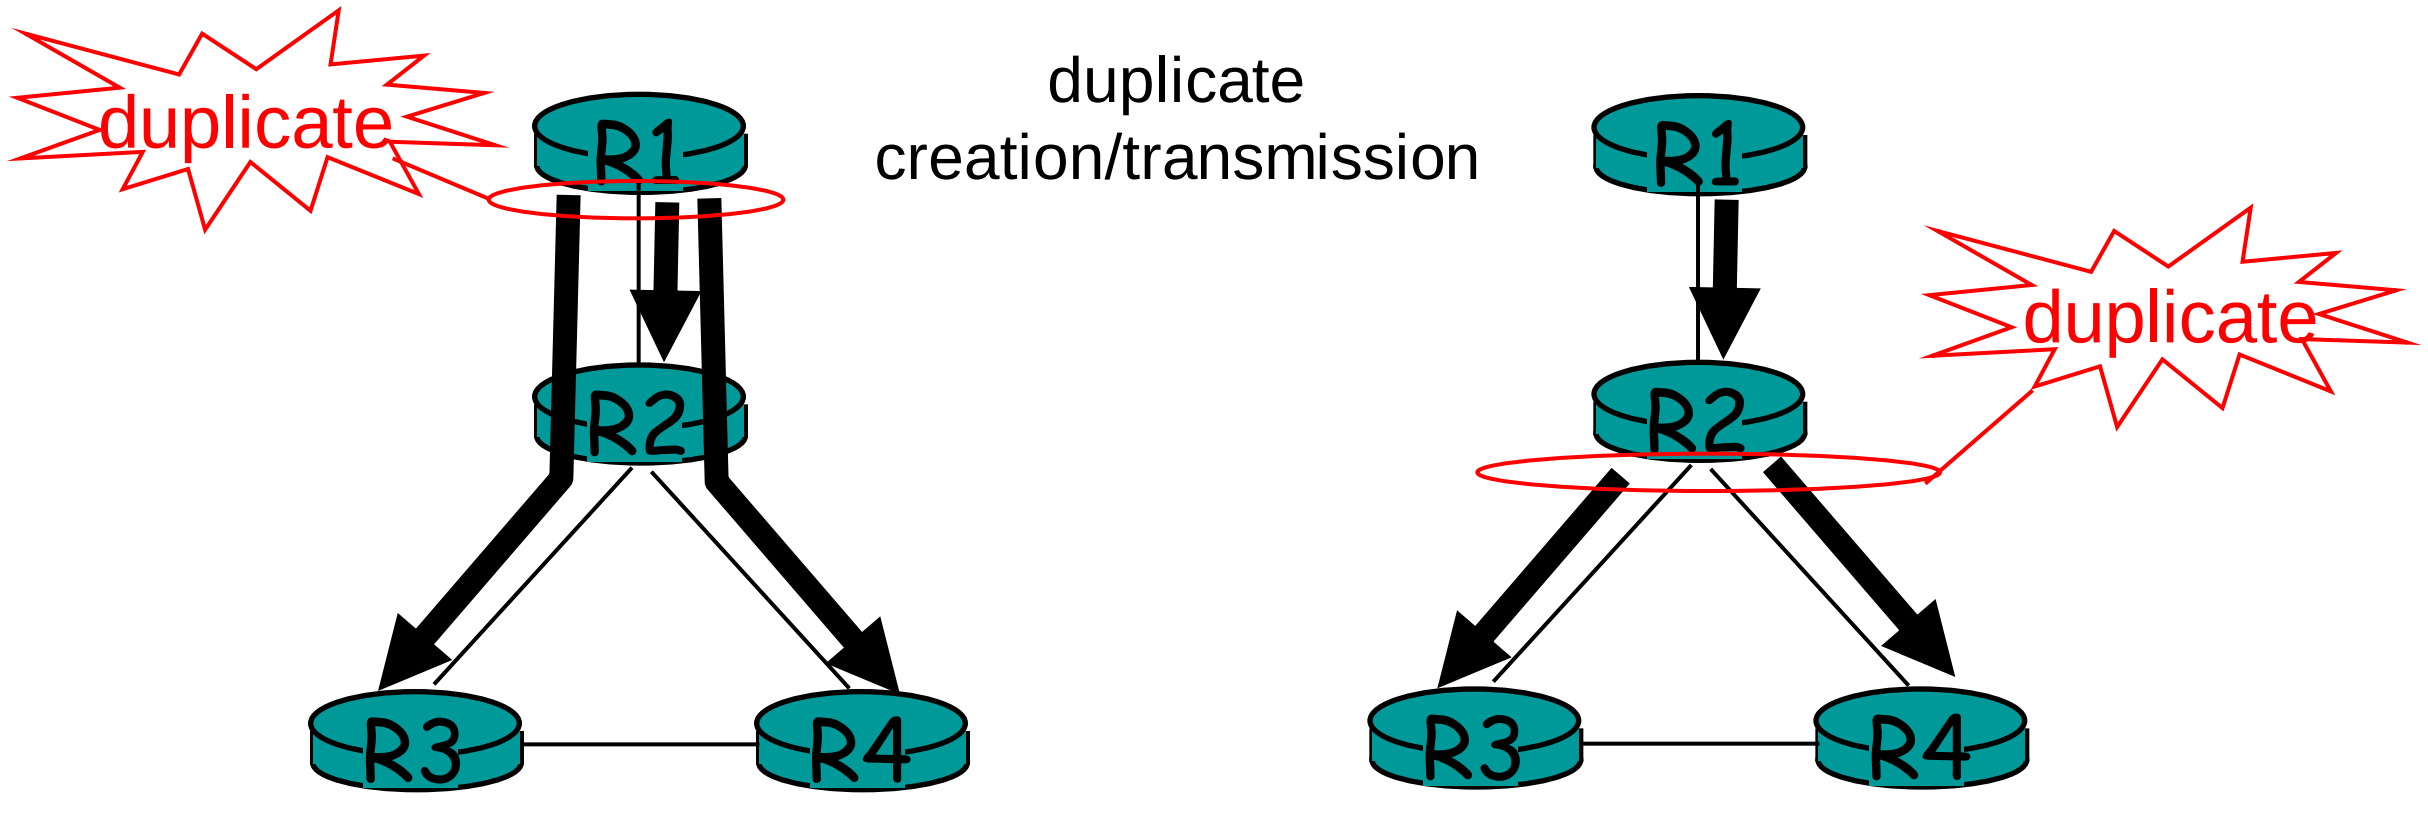

source duplication

in-network duplication

- source duplication: how does source determine recipient addresses?

In-network duplication

- flooding: when node receives brdcst pckt, sends copy to all neighbors
  - » Problems: cycles & broadcast storm
- controlled flooding: node only brdcsts pkt if it hasn’t brdcst same packet before
  - » Node keeps track of pckt ids already brdcsted
  - » Or reverse path forwarding (RPF): only forward pckt if it arrived on shortest path between node and source
- spanning tree
  - » No redundant packets received by any node

Spanning Tree

- First construct a spanning tree
- Nodes forward copies only along spanning tree

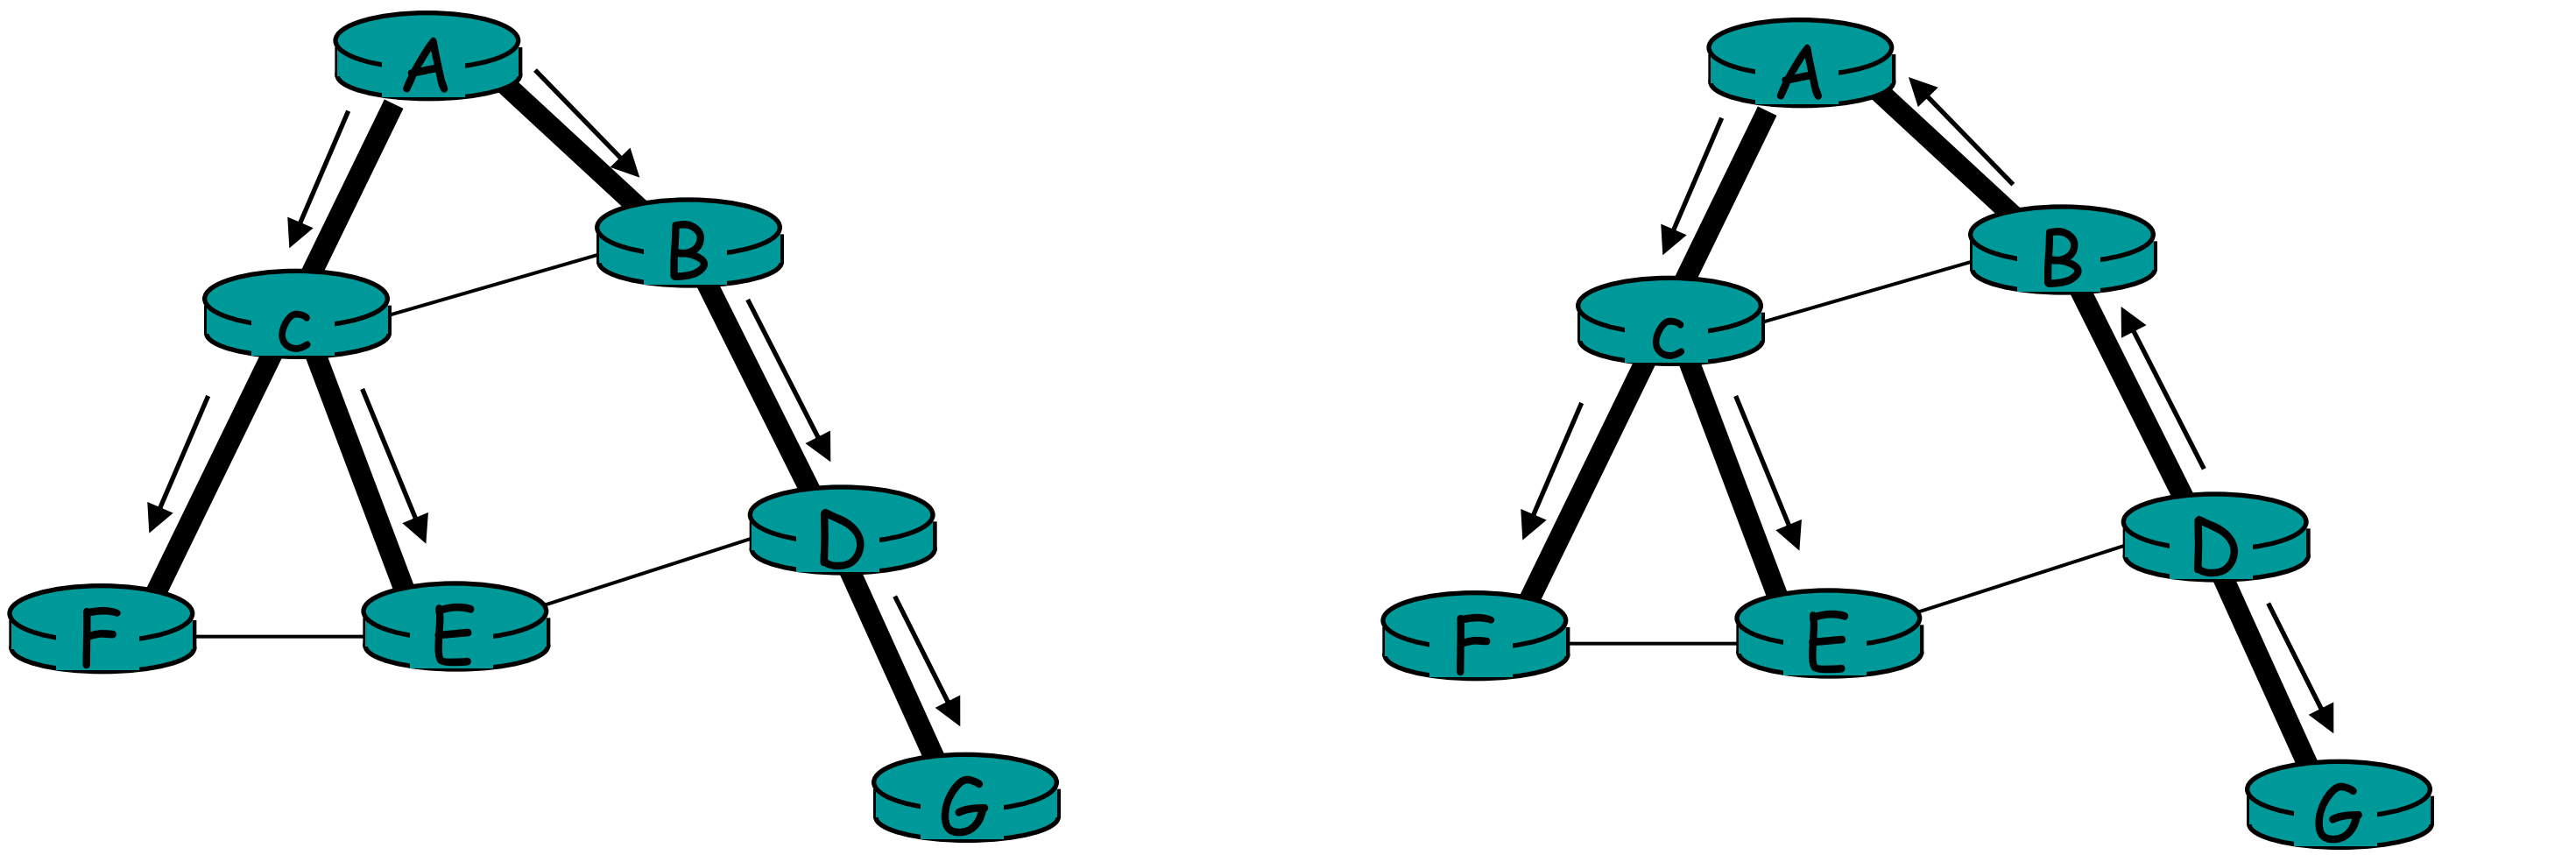

(a) Broadcast initiated at A **(b) Broadcast initiated at D**

Spanning Tree: Creation

- Center node
- Each node sends unicast join message to center node
  - Message forwarded until it arrives at a node already belonging to spanning tree

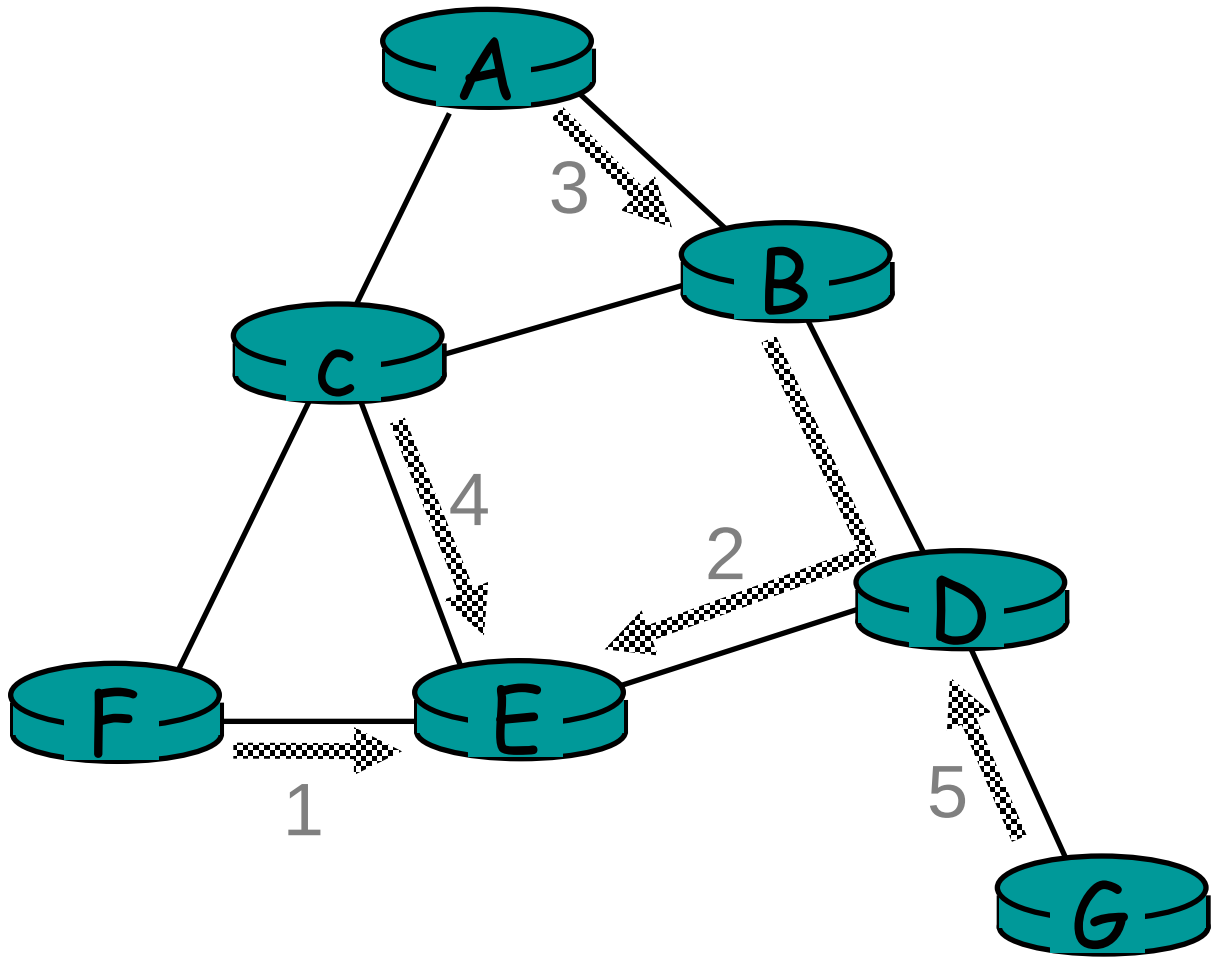

(a) Stepwise construction of spanning tree

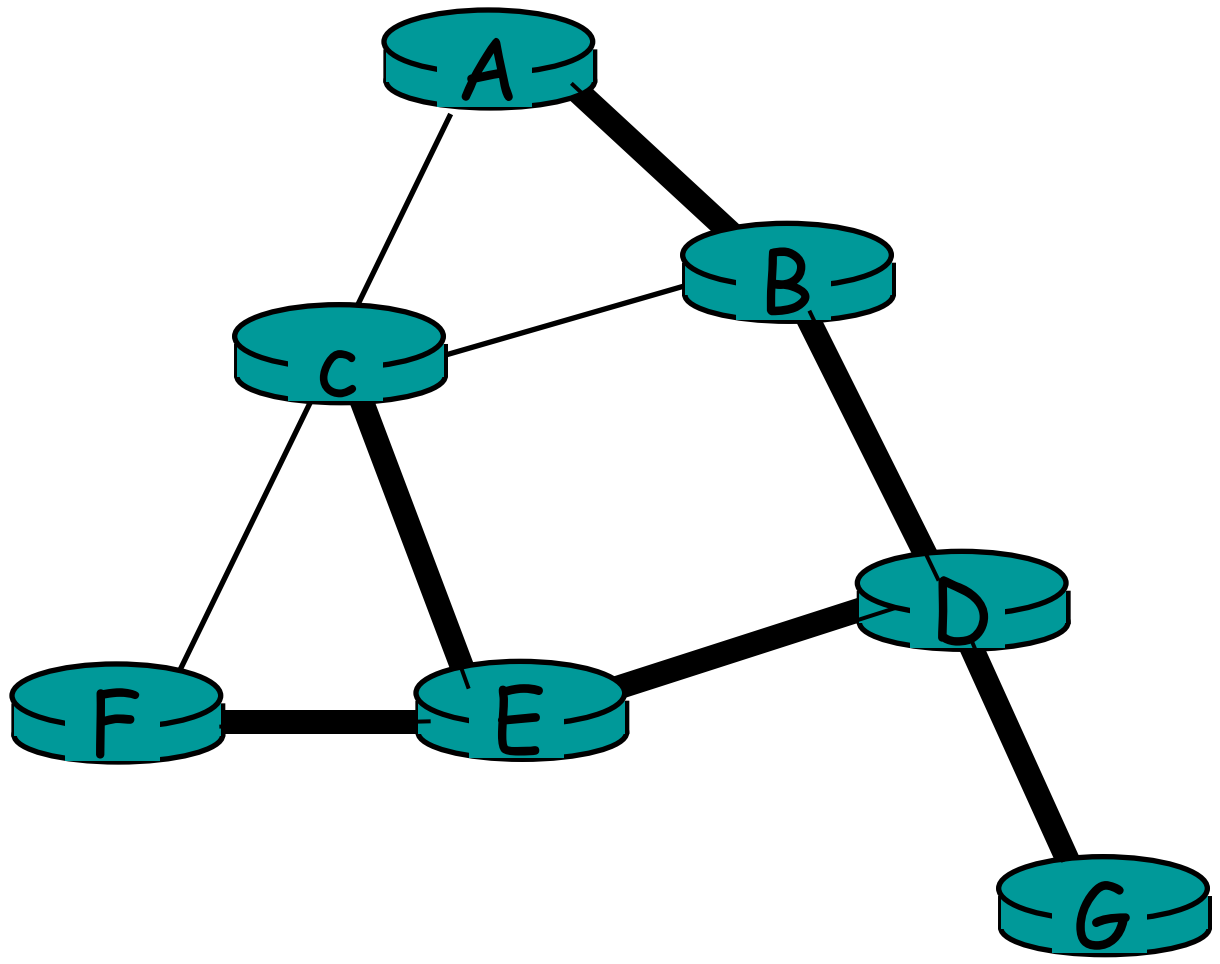

(b) Constructed spanning tree

Multicast Routing: Problem Statement

- ***Goal:*** find a tree (or trees) connecting routers having local mcast group members
  - » *tree:* not all paths between routers used
  - » *source-based:* different tree from each sender to rcvrs
  - » *shared-tree:* same tree used by all group members

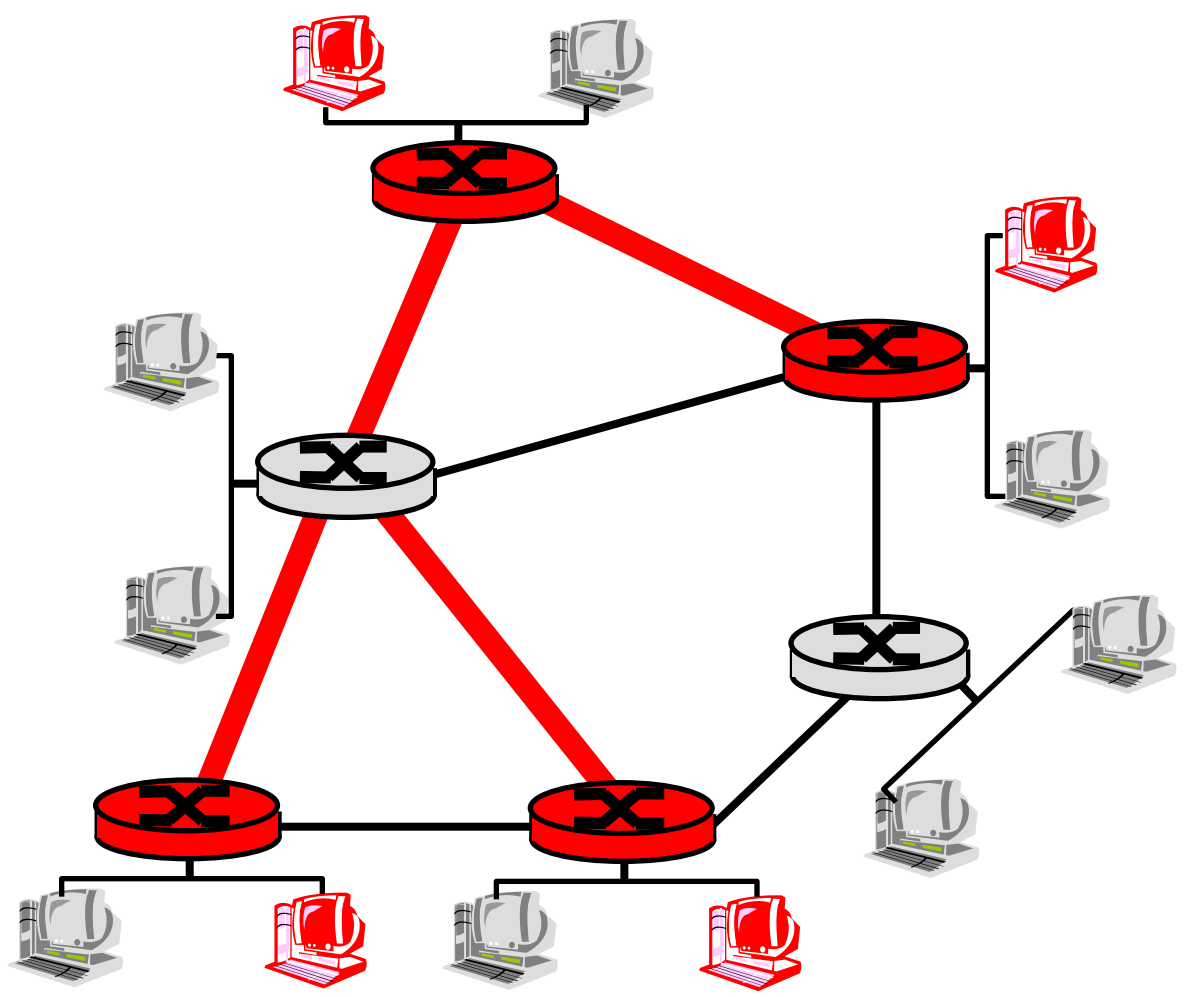

Shared tree

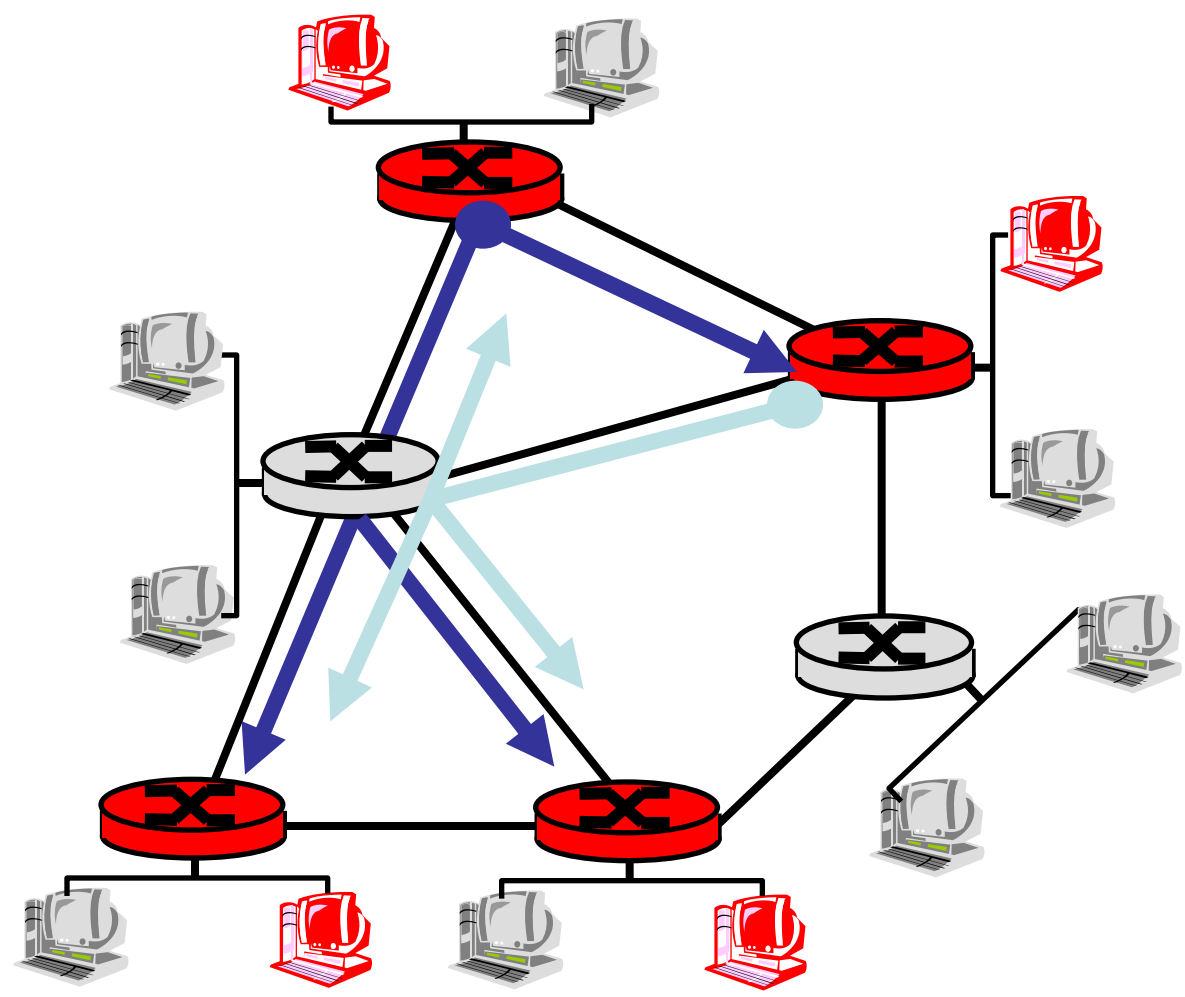

Source-based trees

Approaches:

- source-based tree: one tree per source
  - shortest path trees
  - reverse path forwarding
- group-shared tree: group uses one tree
  - minimal spanning (Steiner)
  - center-based trees

…we first look at basic approaches, then specific protocols adopting these approaches

Shortest Path Tree

- mcast forwarding tree: tree of shortest path routes from source to all receivers
  - Dijkstra's algorithm

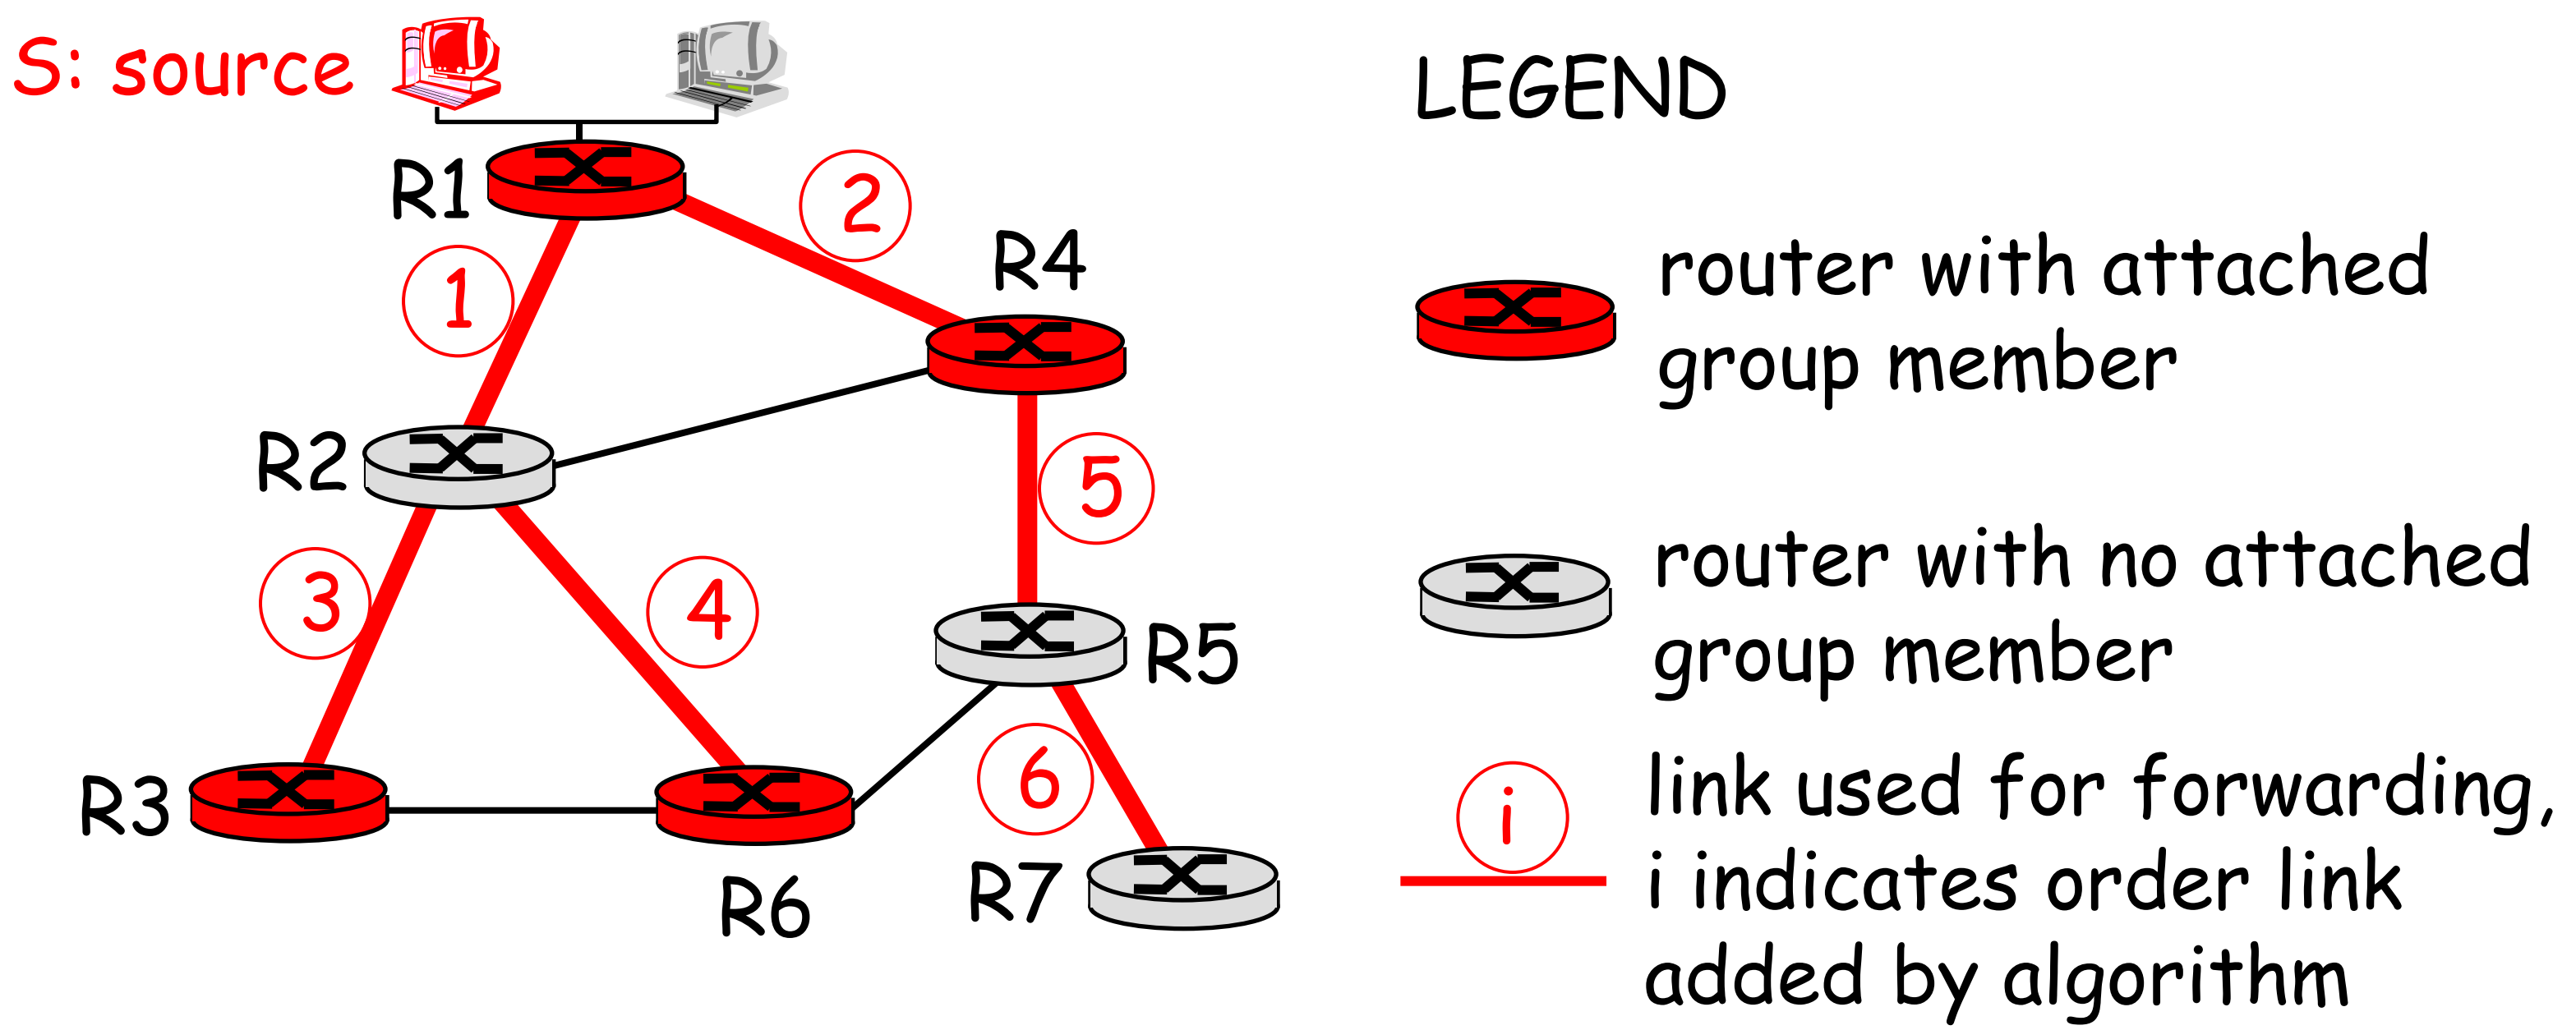

Reverse Path Forwarding

- rely on router's knowledge of unicast shortest path from it to sender
- each router has simple forwarding behavior:

if (mcast datagram received on incoming link on shortest path back to center)

then flood datagram onto all outgoing links

else ignore datagram

Reverse Path Forwarding: example

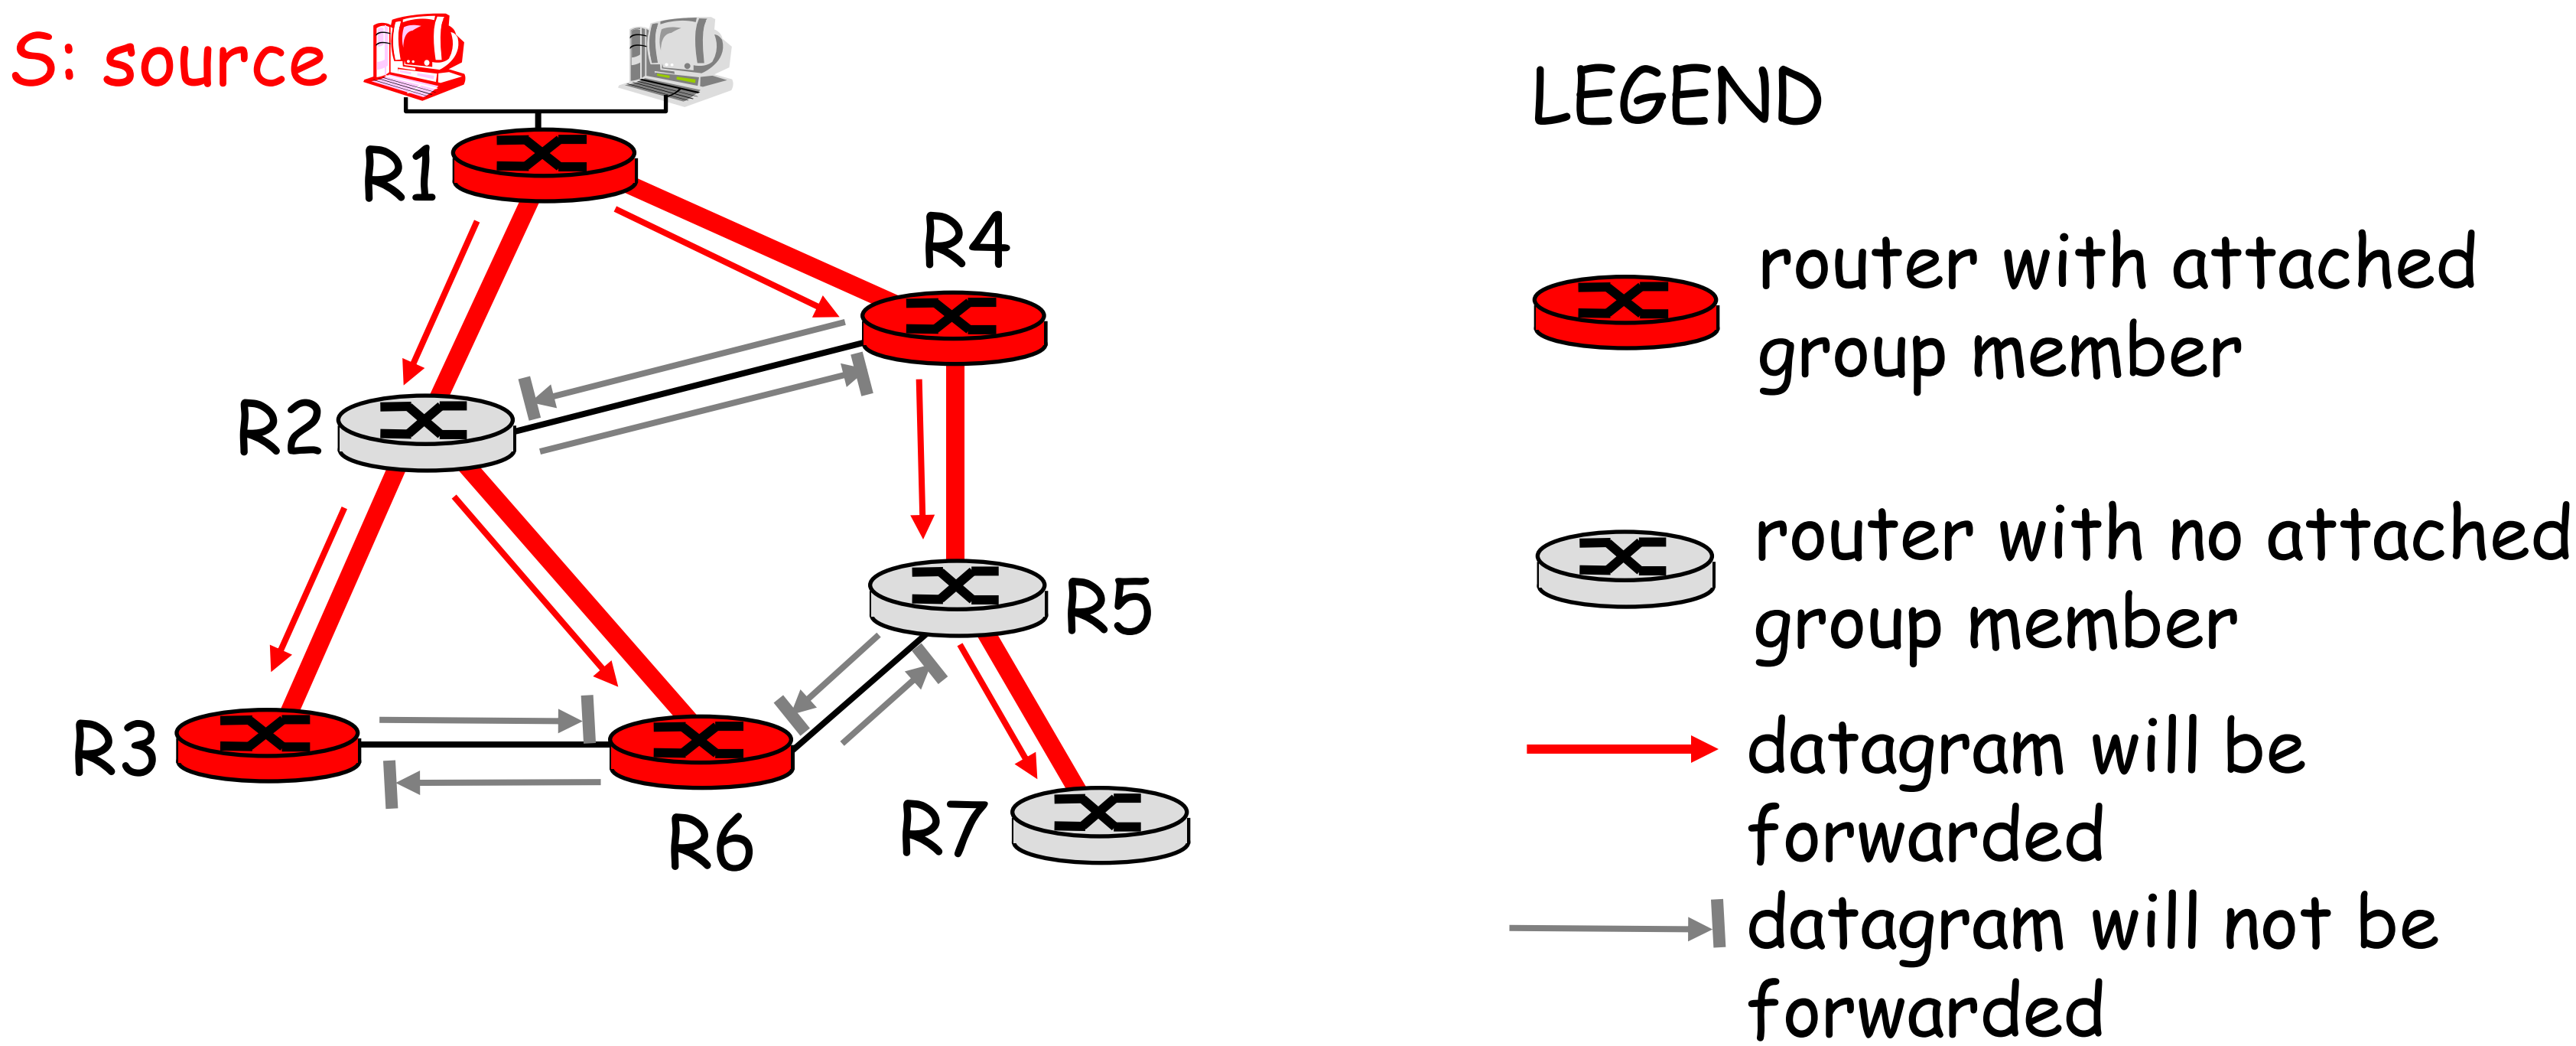

- result is a source-specific *reverse* SPT
  - may be a bad choice with asymmetric links

Reverse Path Forwarding: pruning

- forwarding tree contains subtrees with no mcast group members
  - no need to forward datagrams down subtree
  - "prune" msgs sent upstream by router with no downstream group members

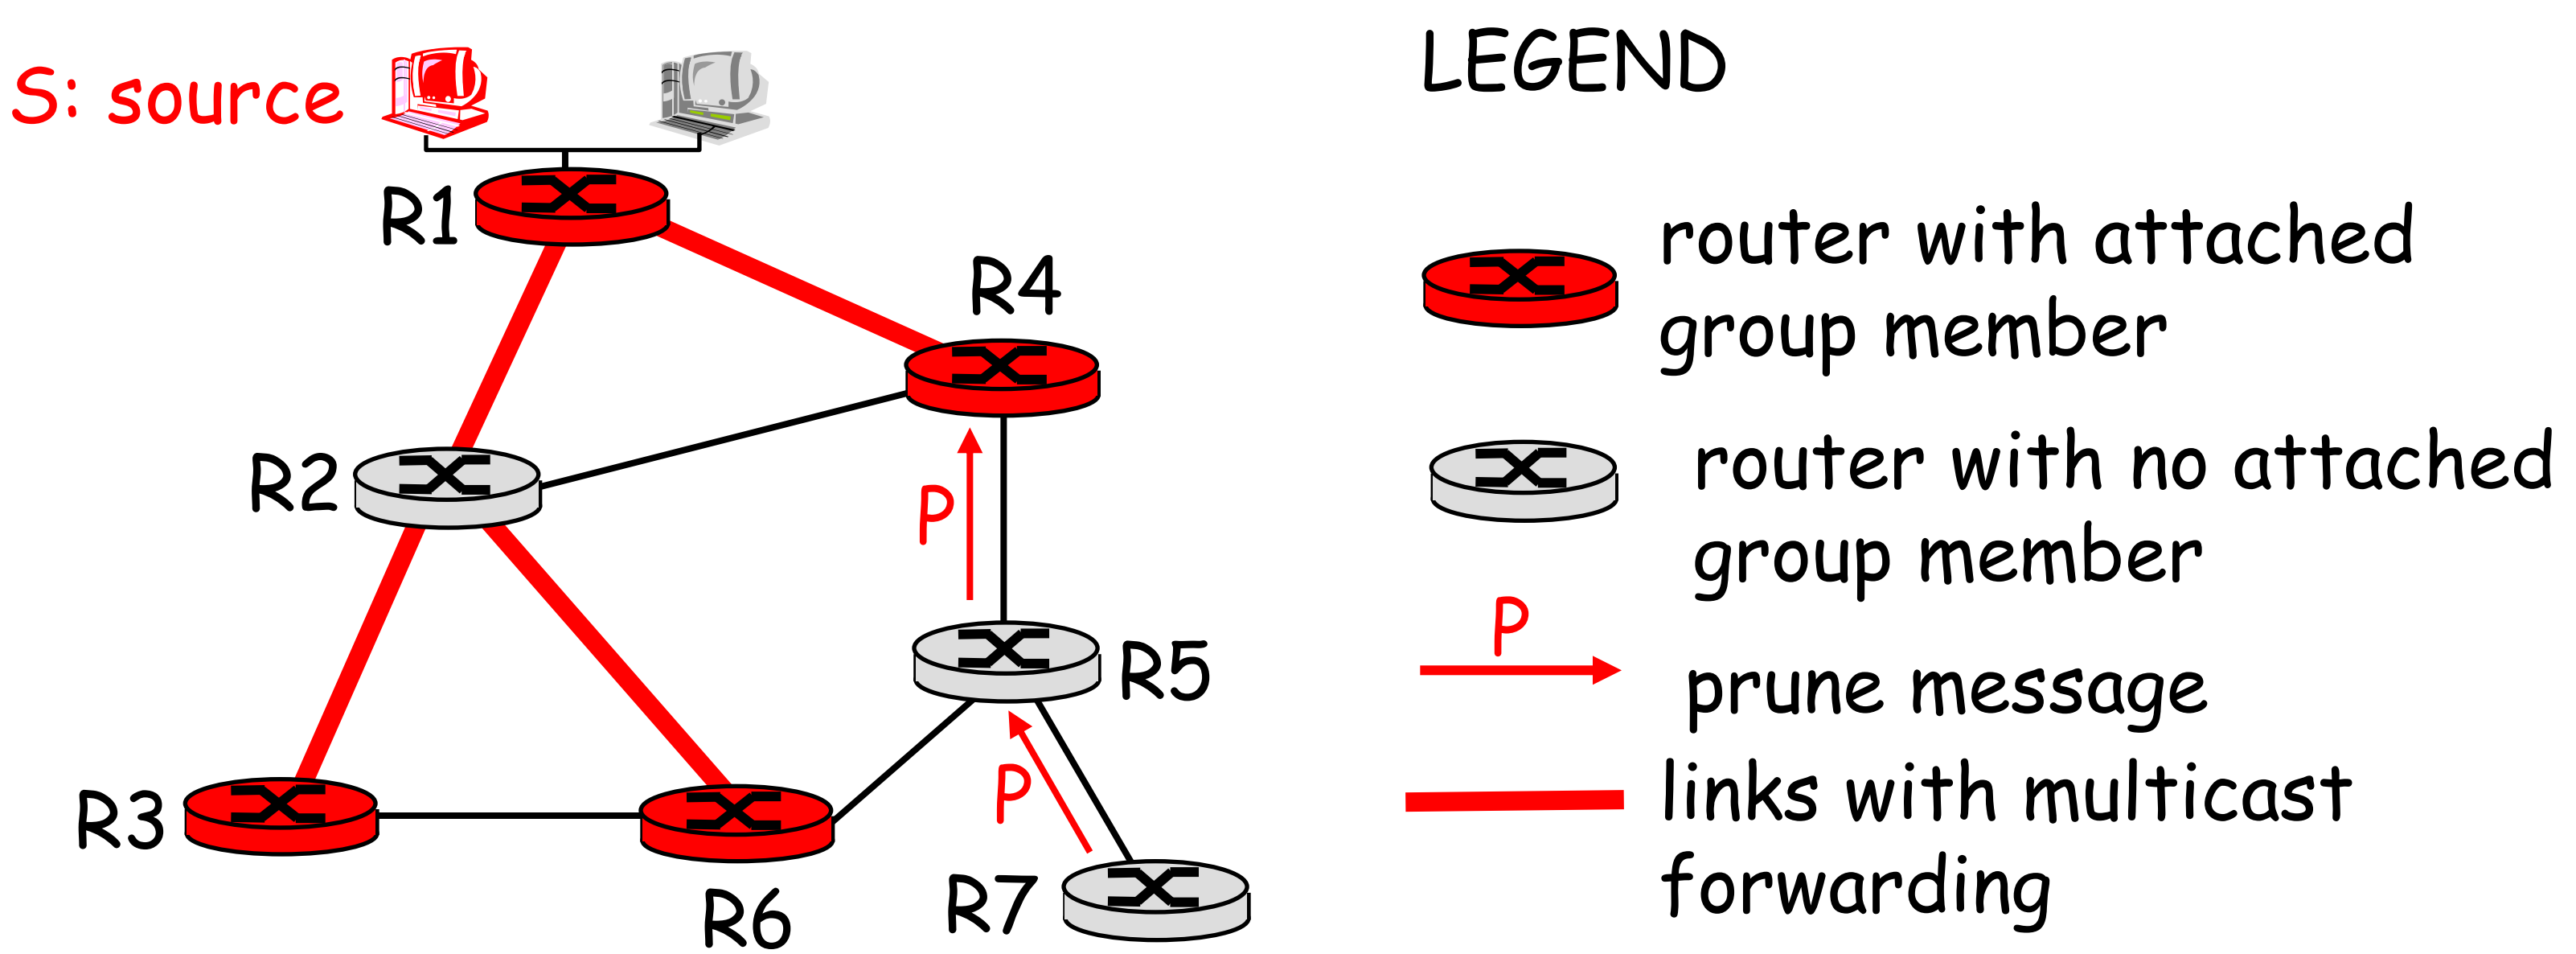

Shared-Tree: Steiner Tree

- Steiner Tree: minimum cost tree connecting all routers with attached group members
- problem is NP-complete
- excellent heuristics exists
- not used in practice:
  - » computational complexity
  - » information about entire network needed
  - » monolithic: rerun whenever a router needs to join/leave

Center-based trees

- single delivery tree shared by all
- one router identified as *"center"* of tree
- to join:
  - » edge router sends unicast *join-msg* addressed to center router
  - » *join-msg* "processed" by intermediate routers and forwarded towards center
  - » *join-msg* either hits existing tree branch for this center, or arrives at center
  - » path taken by *join-msg* becomes new branch of tree for this router

Center-based trees: an example

Suppose R6 chosen as center:

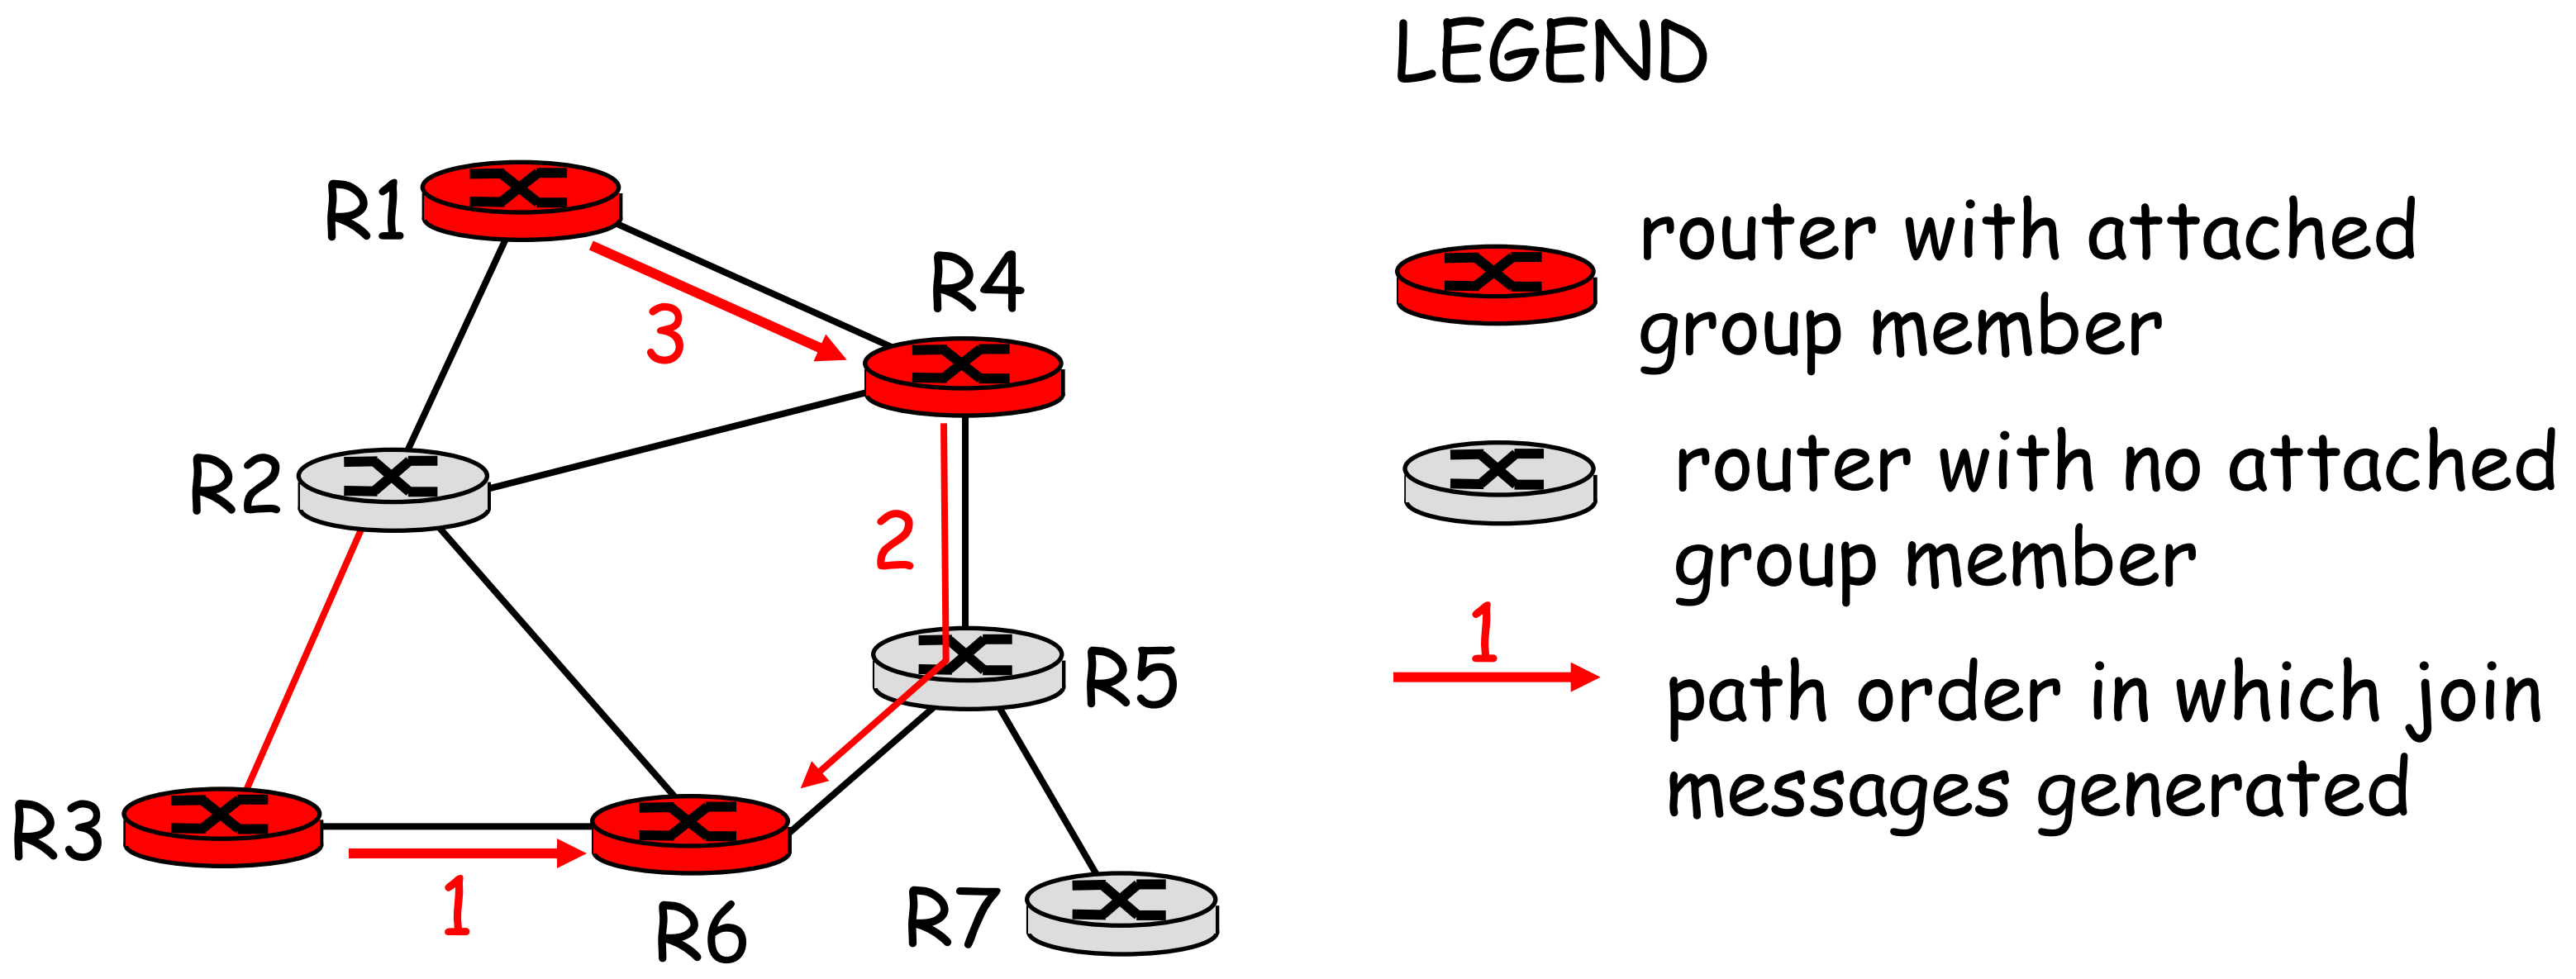

Internet Multicasting Routing: DVMRP

- DVMRP: distance vector multicast routing protocol, RFC1075
- *flood and prune:* reverse path forwarding, source-based tree
  - RPF tree based on DVMRP's own routing tables constructed by communicating DVMRP routers
  - no assumptions about underlying unicast
  - initial datagram to mcast group flooded everywhere via RPF
  - routers not wanting group: send upstream prune msgs

DVMRP: continued…

- *soft state:* DVMRP router periodically (1 min.) "forgets" branches are pruned:
  - mcast data again flows down unpruned branch
  - downstream router: reprune or else continue to receive data
- routers can quickly regraft to tree
  - following IGMP join at leaf
- odds and ends
  - commonly implemented in commercial routers
  - Mbone routing done using DVMRP

Tunneling

Q: How to connect "islands" of multicast routers in a "sea" of unicast routers?

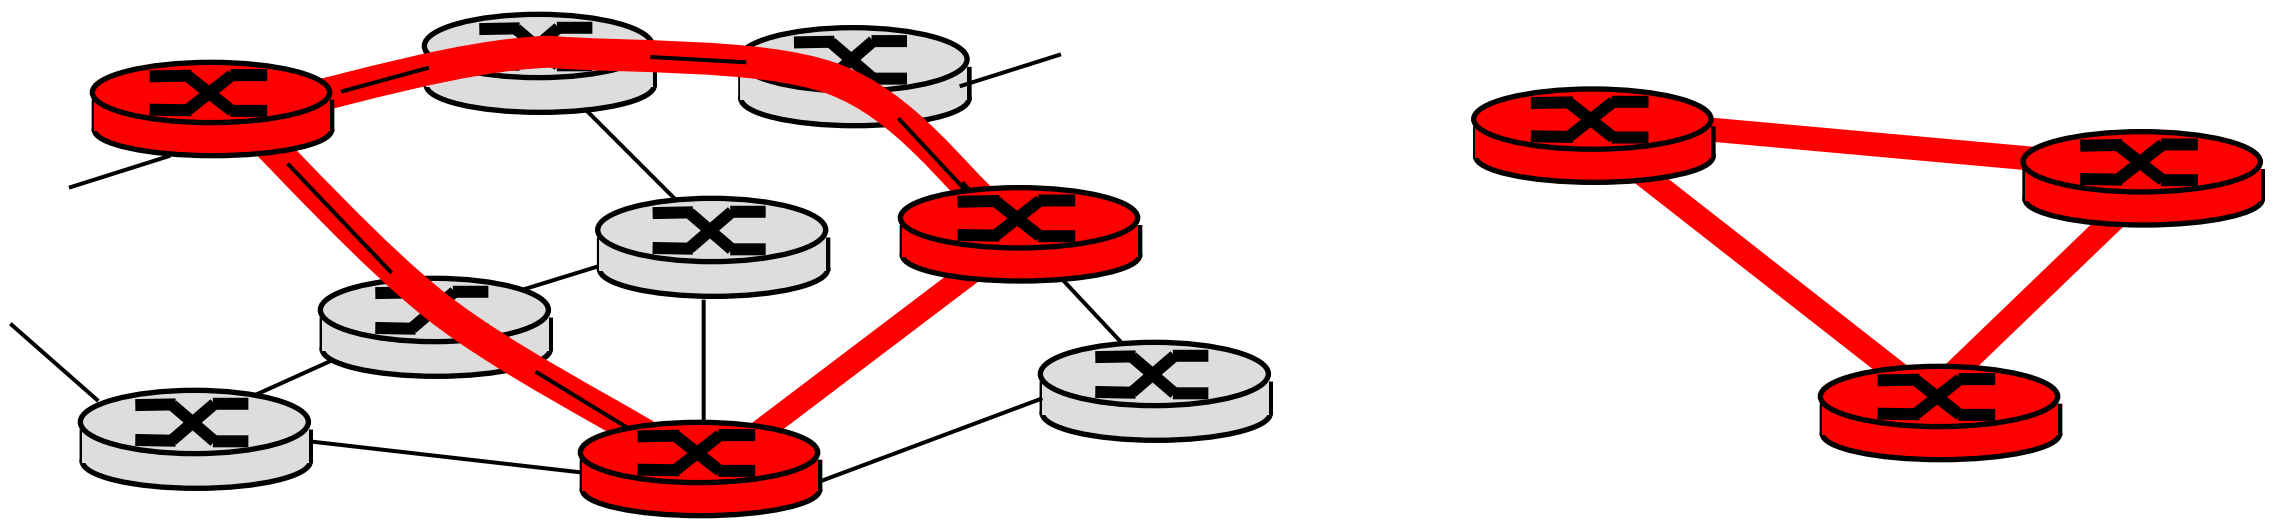

physical topology

logical topology

- mcast datagram encapsulated inside "normal" (non-multicast-addressed) datagram
- normal IP datagram sent thru "tunnel" via regular IP unicast to receiving mcast router
- receiving mcast router unencapsulates to get mcast datagram

PIM: Protocol Independent Multicast

- not dependent on any specific underlying unicast routing algorithm (works with all)
- two different multicast distribution scenarios :

Dense:

- group members densely packed, in "close" proximity.
- bandwidth more plentiful

Sparse:

- # networks with group members small wrt # interconnected networks
- group members "widely dispersed"
- bandwidth not plentiful

Consequences of Sparse-Dense Dichotomy:

Dense

- group membership by routers *assumed* until routers explicitly prune
- *data-driven* construction on mcast tree (e.g., RPF)
- bandwidth and non-group-router processing *profligate*

Sparse:

- no membership until routers explicitly join
- *receiver- driven* construction of mcast tree (e.g., center-based)
- bandwidth and non-group-router processing *conservative*

PIM- Dense Mode

flood-and-prune RPF, similar to DVMRP but

- underlying unicast protocol provides RPF info for incoming datagram
- less complicated (less efficient) downstream flood than DVMRP reduces reliance on underlying routing algorithm
- has protocol mechanism for router to detect it is a leaf-node router

PIM - Sparse Mode

- center-based approach
- router sends *join* msg to rendezvous point (RP)
  - intermediate routers update state and forward *join*
- after joining via RP, router can switch to source-specific tree
  - increased performance: less concentration, shorter paths

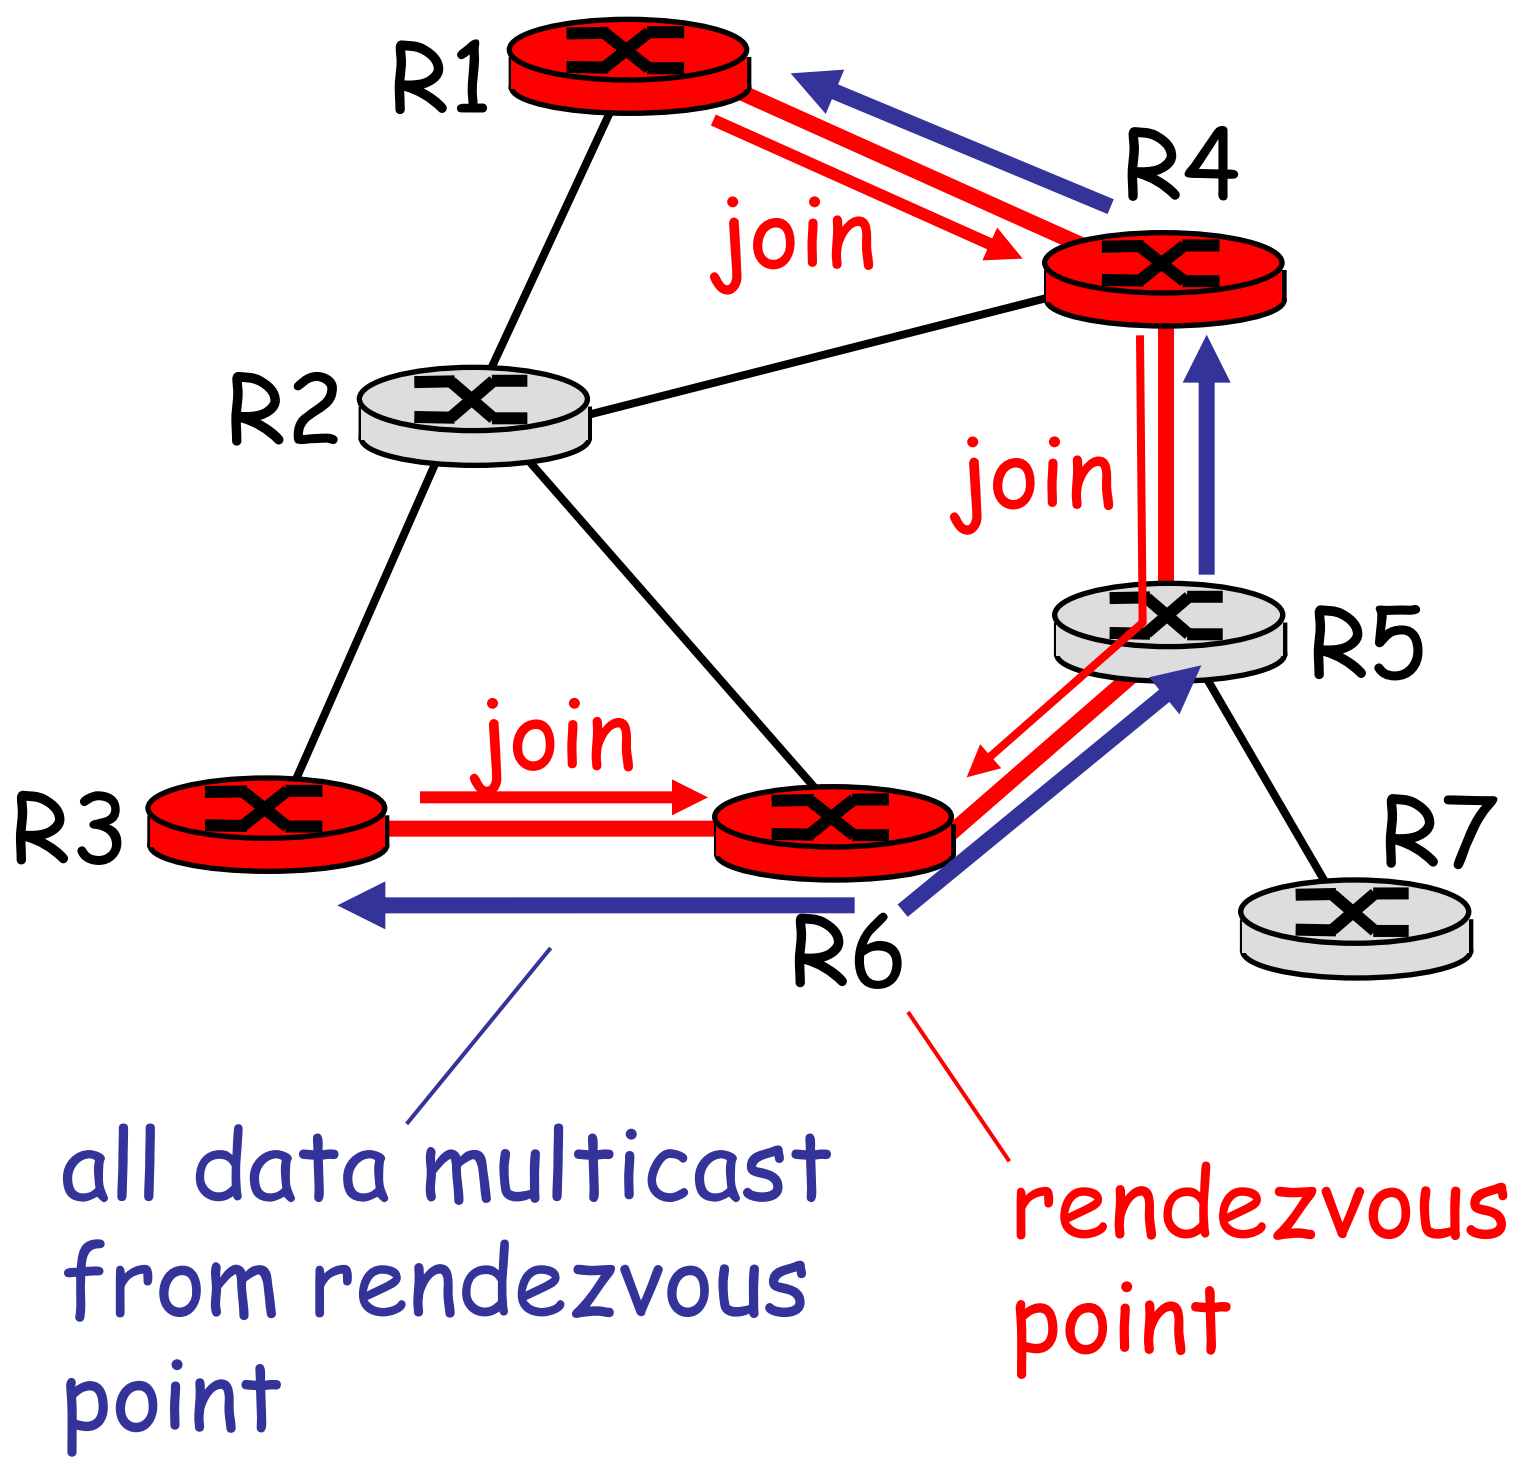

PIM - Sparse Mode

<u>sender(s):</u>

- unicast data to RP, which distributes down RP-rooted tree
- RP can extend mcast tree upstream to source
- RP can send *stop* msg if no attached receivers
  - » "no one is listening!"

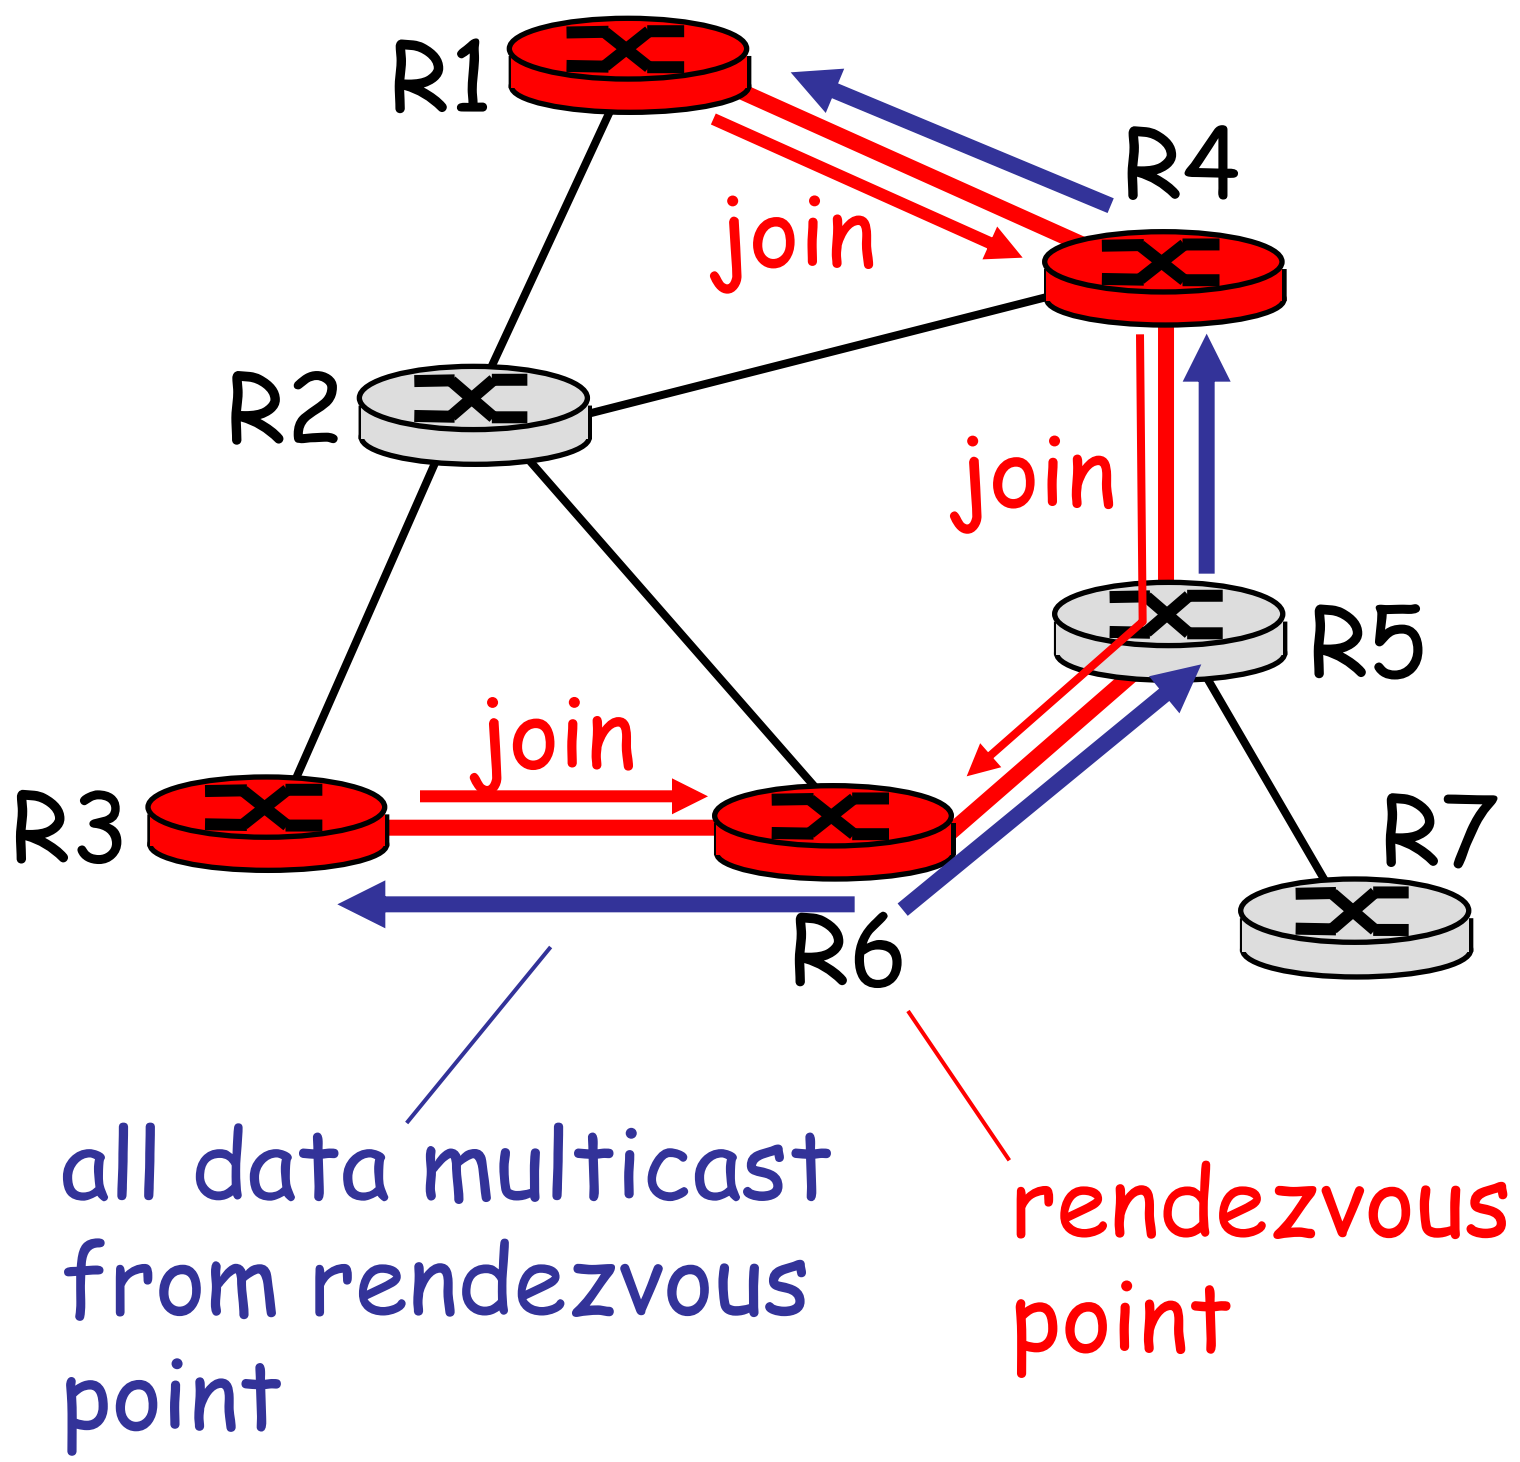

Agenda

1. Session Overview
2. Networks Part 2
3. Summary and Conclusion

Summary

- Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- Routing in the Internet
  - RIP
  - OSPF
  - BGP
  - Broadcast and multicast routing

Assignments & Readings

- Readings



  - Chapter 4
- Assignment #8

Next Session: The Internet Transport Protocols – TCP, UDP