


夹具总装图

FIXTURE ASSEMBLY / TAPERED MANDREL + SIX SUPPORTS

HJ-DRW-005

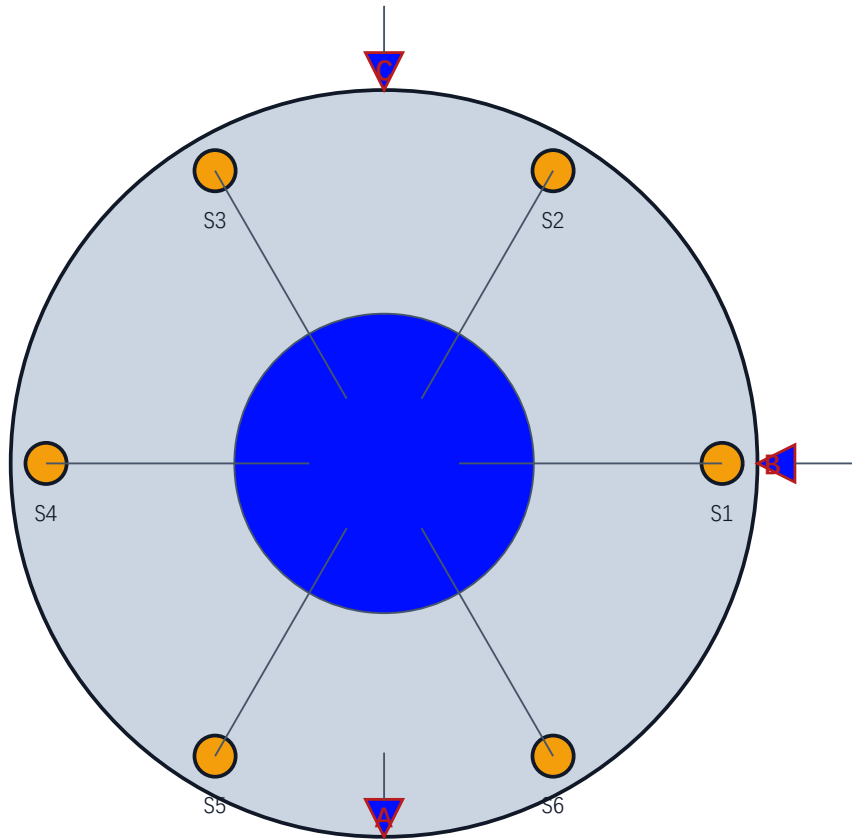

FIXTURE DEFINITION

BASE Ø190

DIAMETER TAPER $(D-d)/L = 0.020 = 1:50$

Ø39.90 ~ Ø40.10

Axial clamping force 500 N

Positioning repeatability 0.008 mm

6 radial compliant supports @ 1200 N/mm equiv

DOF CONTROL / ASSEMBLY MAPPING

A base top plane → assembly A

B mandrel axis → assembly B (self-centering)

C independent clocking pin → assembly C

Tapered fit auto-centers bore axis to fixture axis

MATERIAL: Fixture steel / material and heat treatment TBD

GENERAL TOLERANCE EXCLUDES FIT/CONTROLLED DIMS: ± 0.10 mm (design assumption; verify before release)

Functional assembly datums: A=seat/support plane; B=shell theoretical axis; C=independent clocking; design-review only.

STATUS: DESIGN-REVIEW