


# 接头与焊缝细节图

JOINT DETAIL / SECTION A-A / FILLET WELD

HJ-DRW-003

## SECTION A-A

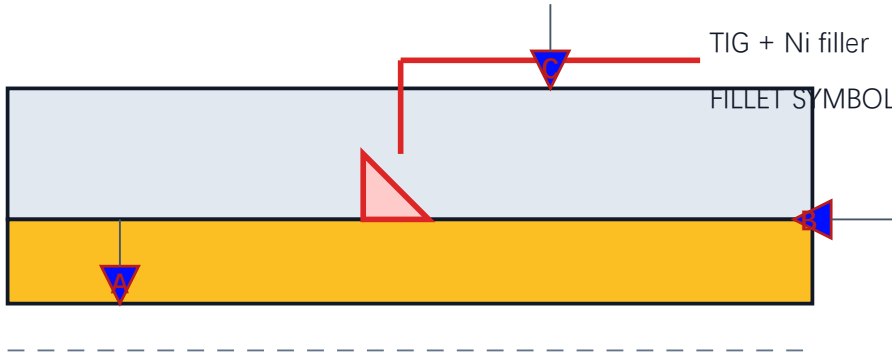

WING OD  $\varnothing 149.96$ ; LIMIT 149.94~149.98

SHELL ID  $\varnothing 150.00$ ; LIMIT 150.00~150.02

RADIAL CLEARANCE 0.01~0.04

DESIGN LEG TARGET 3.5 (UNVERIFIED)

## PROCESS NOTE

Controlled limit fit; radial clearance 0.01~0.04

Fillet weld symbol per GB/T 324; TIG + Ni filler

Automatic TIG, short segments, S3 sequence

Current feed equivalent ideal leg 1.74 mm

Design/deposition geometry NOT CLOSED; macrosection required

A: shell seating plane

B: shell theoretical axis

C: independent clocking feature

Controlled  $\varnothing 40$  bore axis: position  $\varnothing 0.05$  | A | B

MATERIAL: QT450-10 + Q235B + Ni filler (weld metal grade to be verified)

GENERAL TOLERANCE EXCLUDES FIT/CONTROLLED DIMS:  $\pm 0.10$  mm (design assumption; verify before release)

Functional assembly datums: A=seat/support plane; B=shell theoretical axis; C=independent clocking; design-review only.

STATUS: DESIGN-REVIEW