



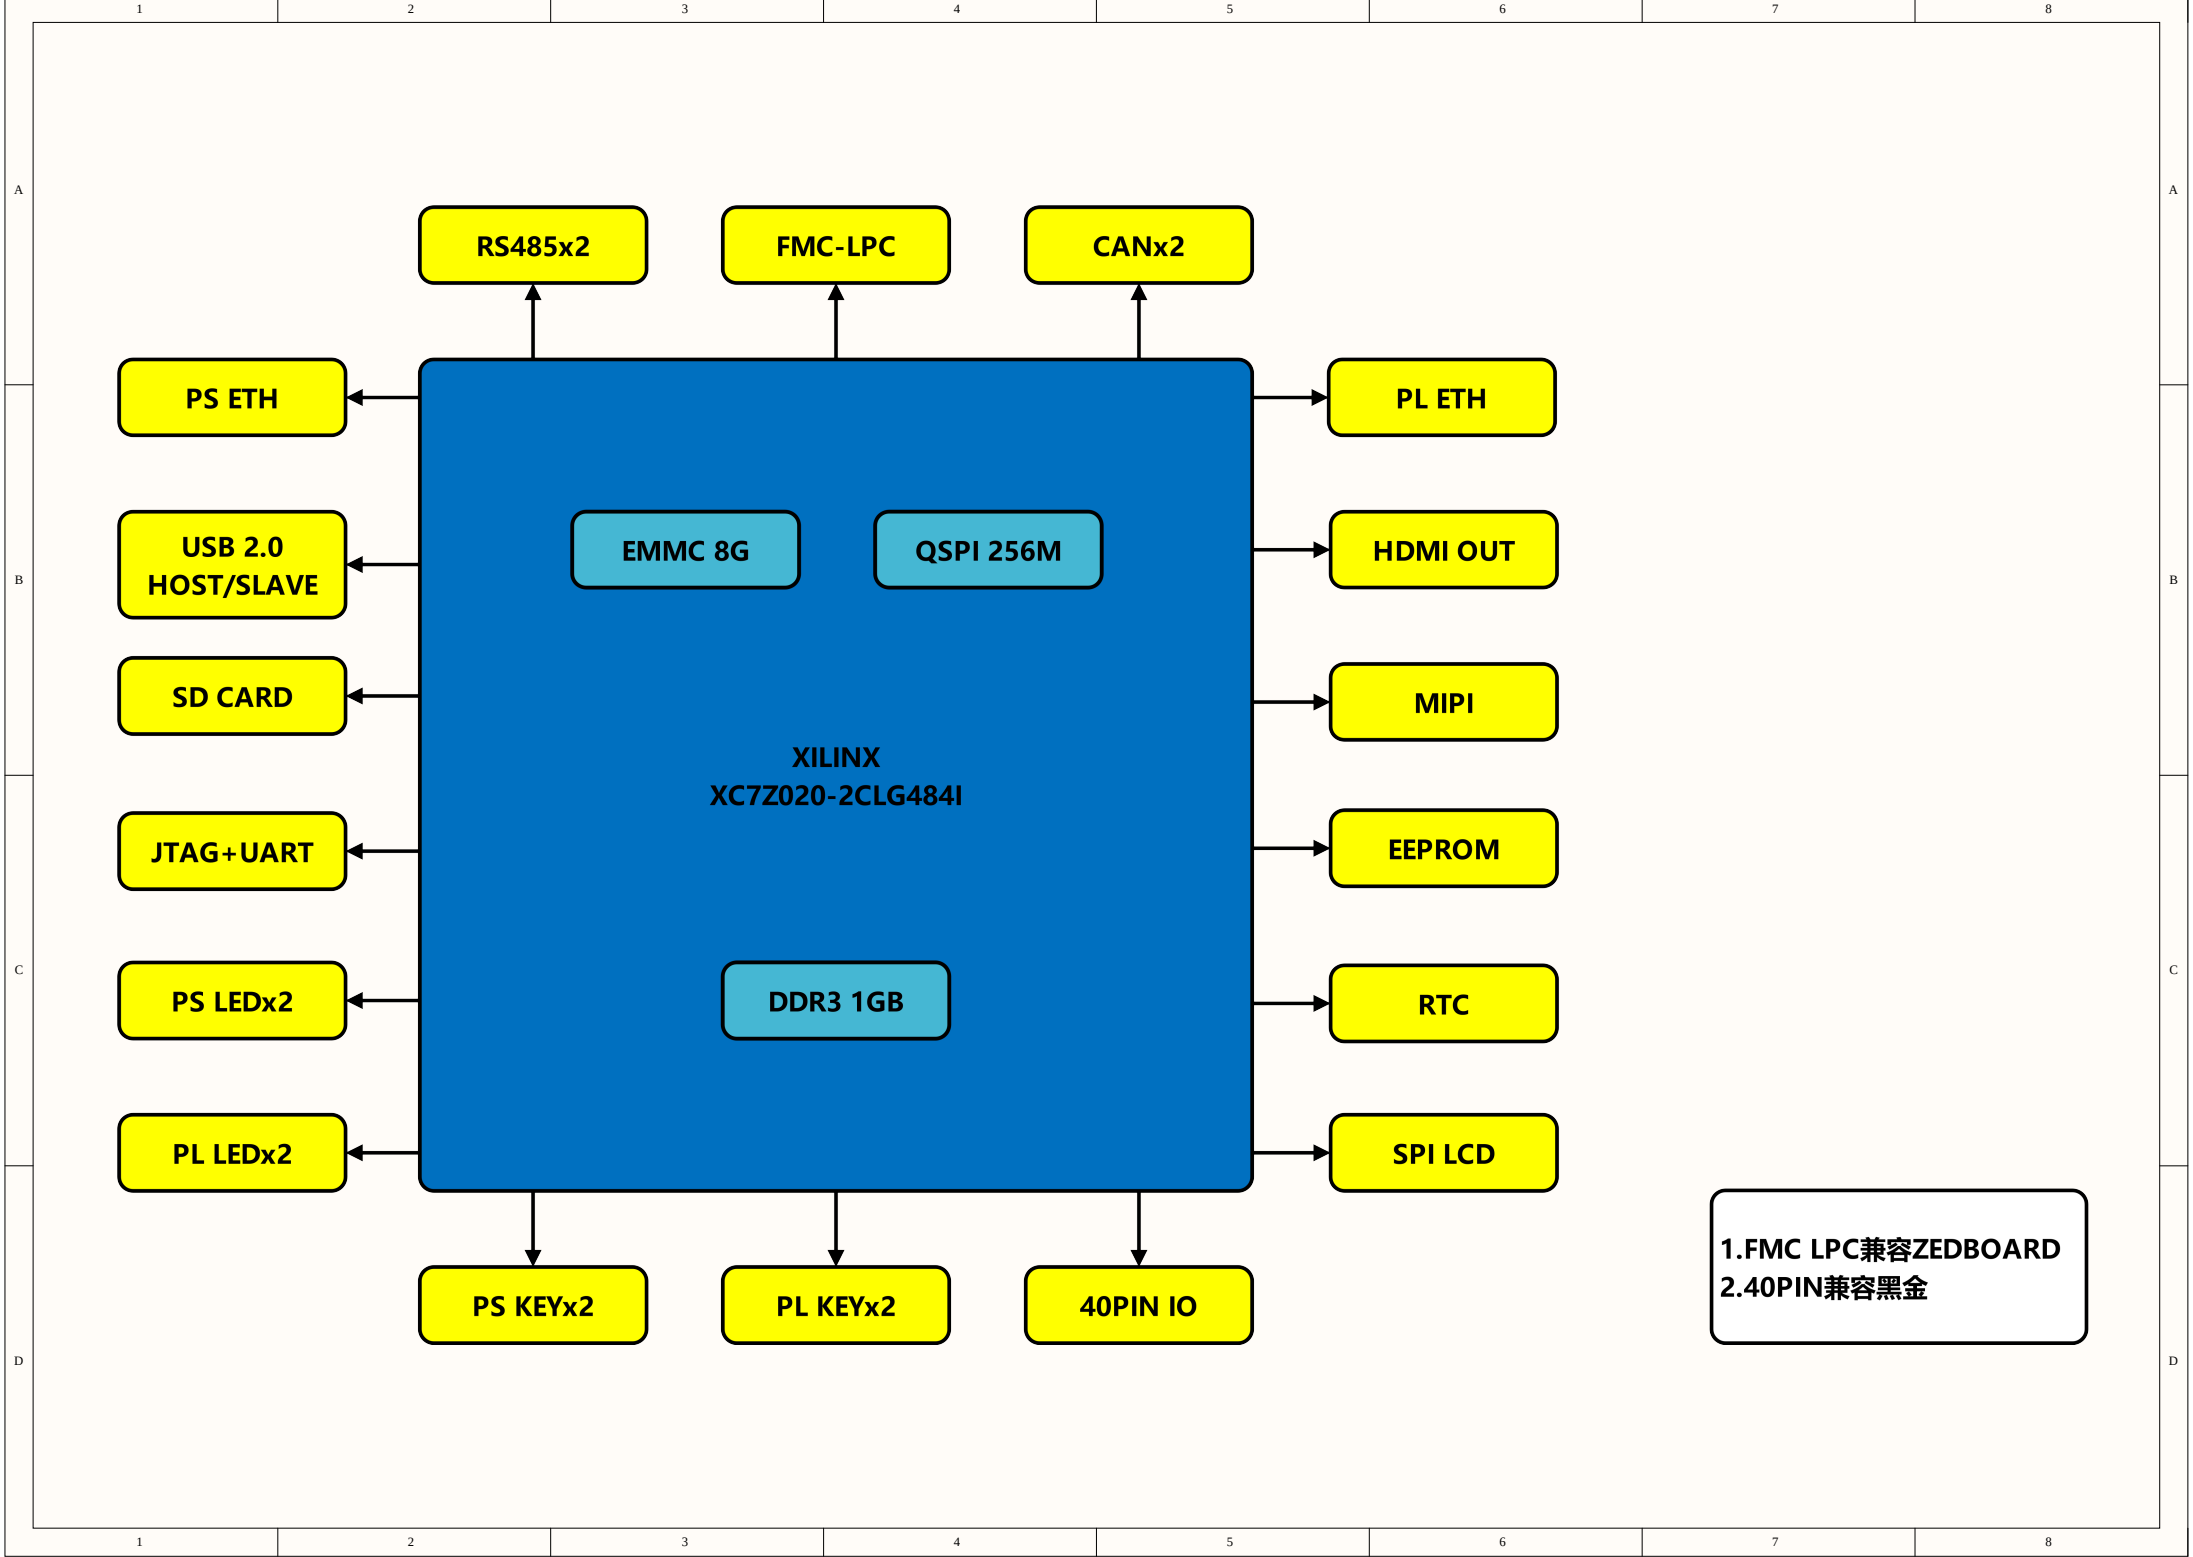


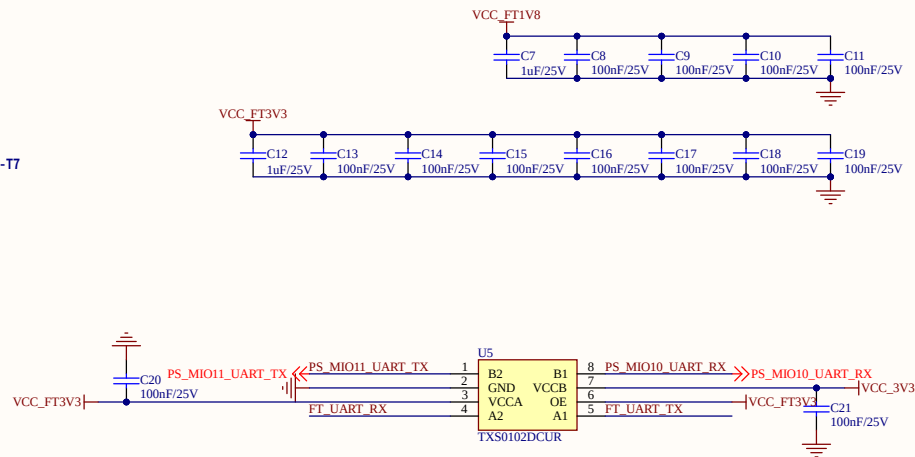




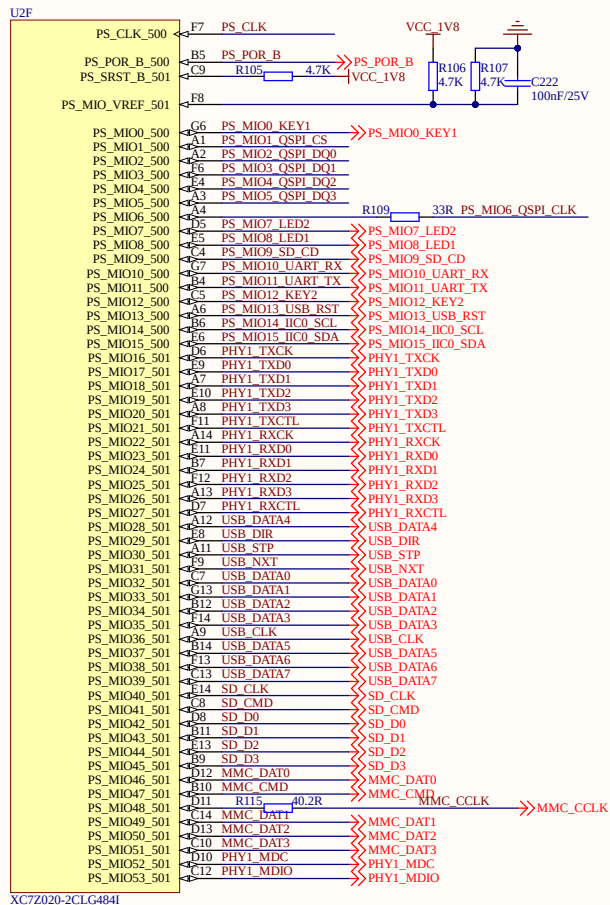


XC7Z020-2CLG484I

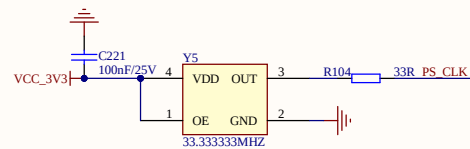


PS CLK

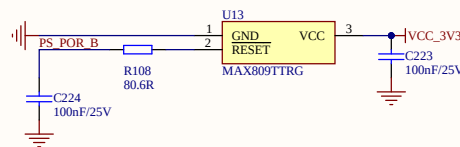


监控复位



复位按键

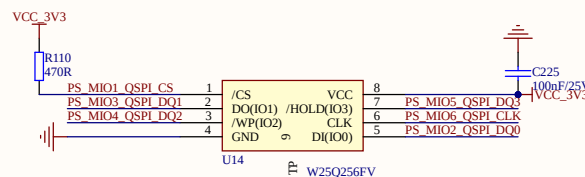


QSPI FLASH

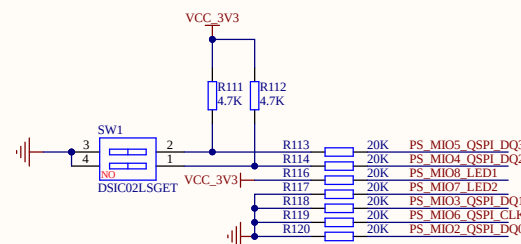



MIO[8]=1 -- MIO bank1 V=1.8V  
MIO[7]=0 -- MIO bank0 V=3.3V  
MIO[3]=0 -- JTAG/NAND/QSPI/SD  
MIO[6]=0 -- PLL Enabled  
MIO[2]=0 -- JTAG Cascade mode


BOOT

| MIO 4 MIO 5 |     |     |
|-------------|-----|-----|
| BOOT_CFG    | 1   | 2   |
| JTAG        | ON  | ON  |
| NAND        | OFF | ON  |
| QSPI        | ON  | OFF |
| SD Card     | OFF | OFF |

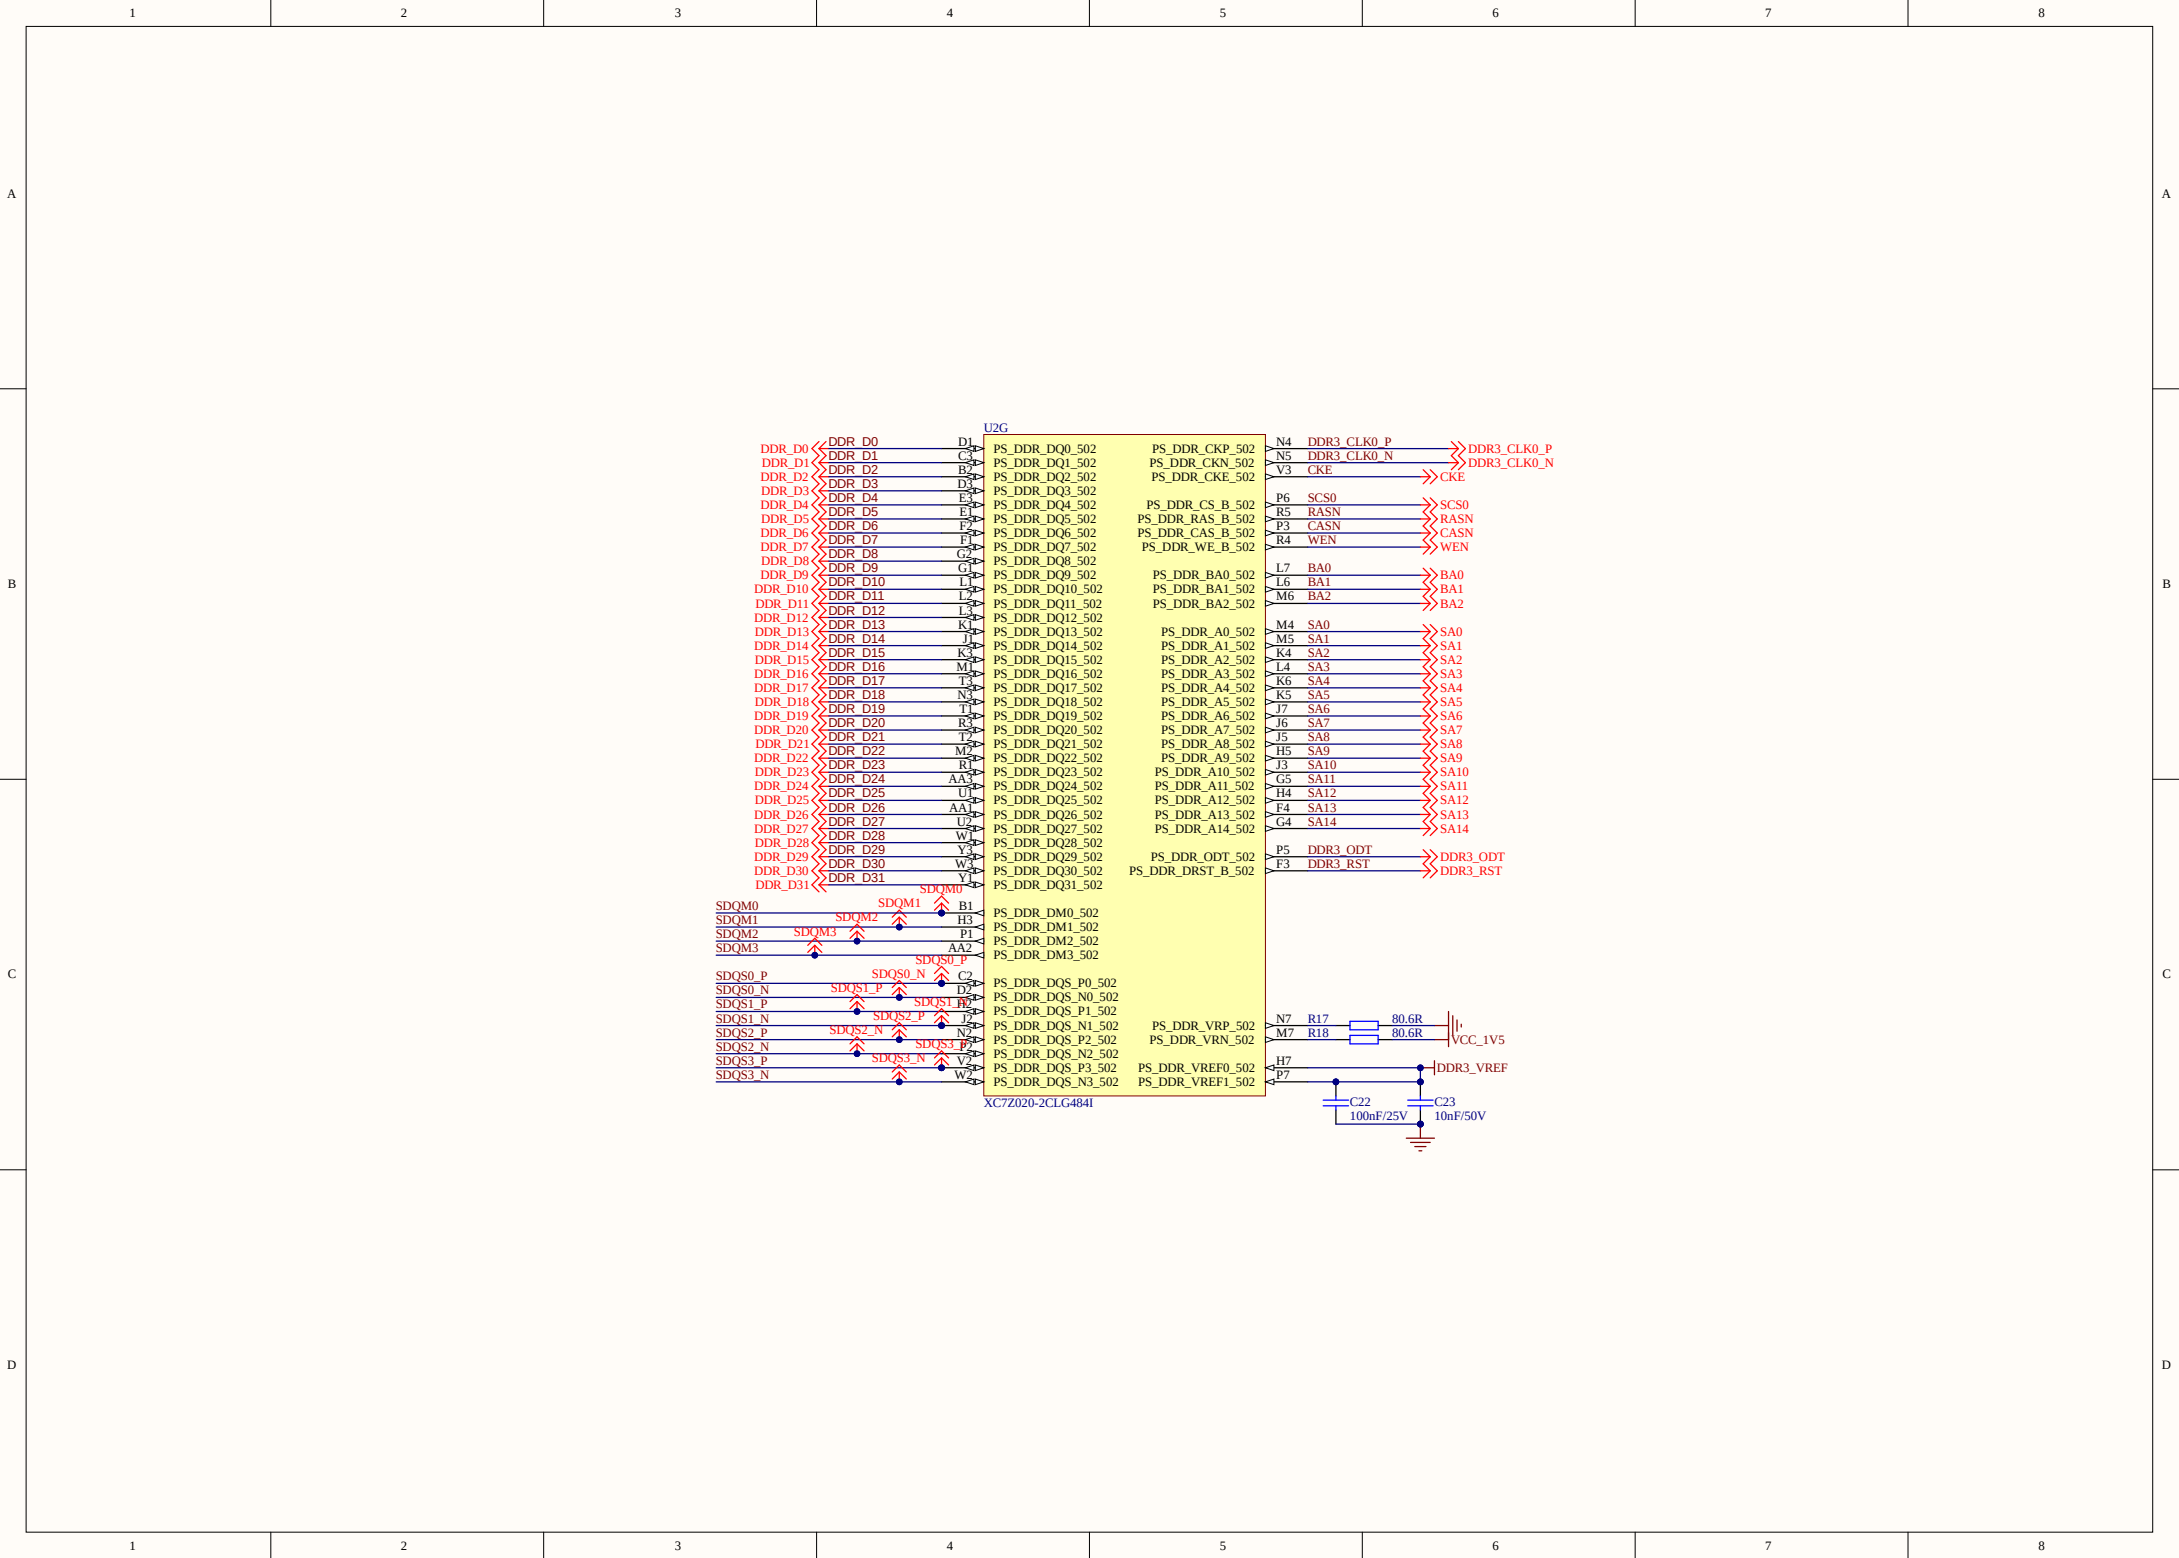

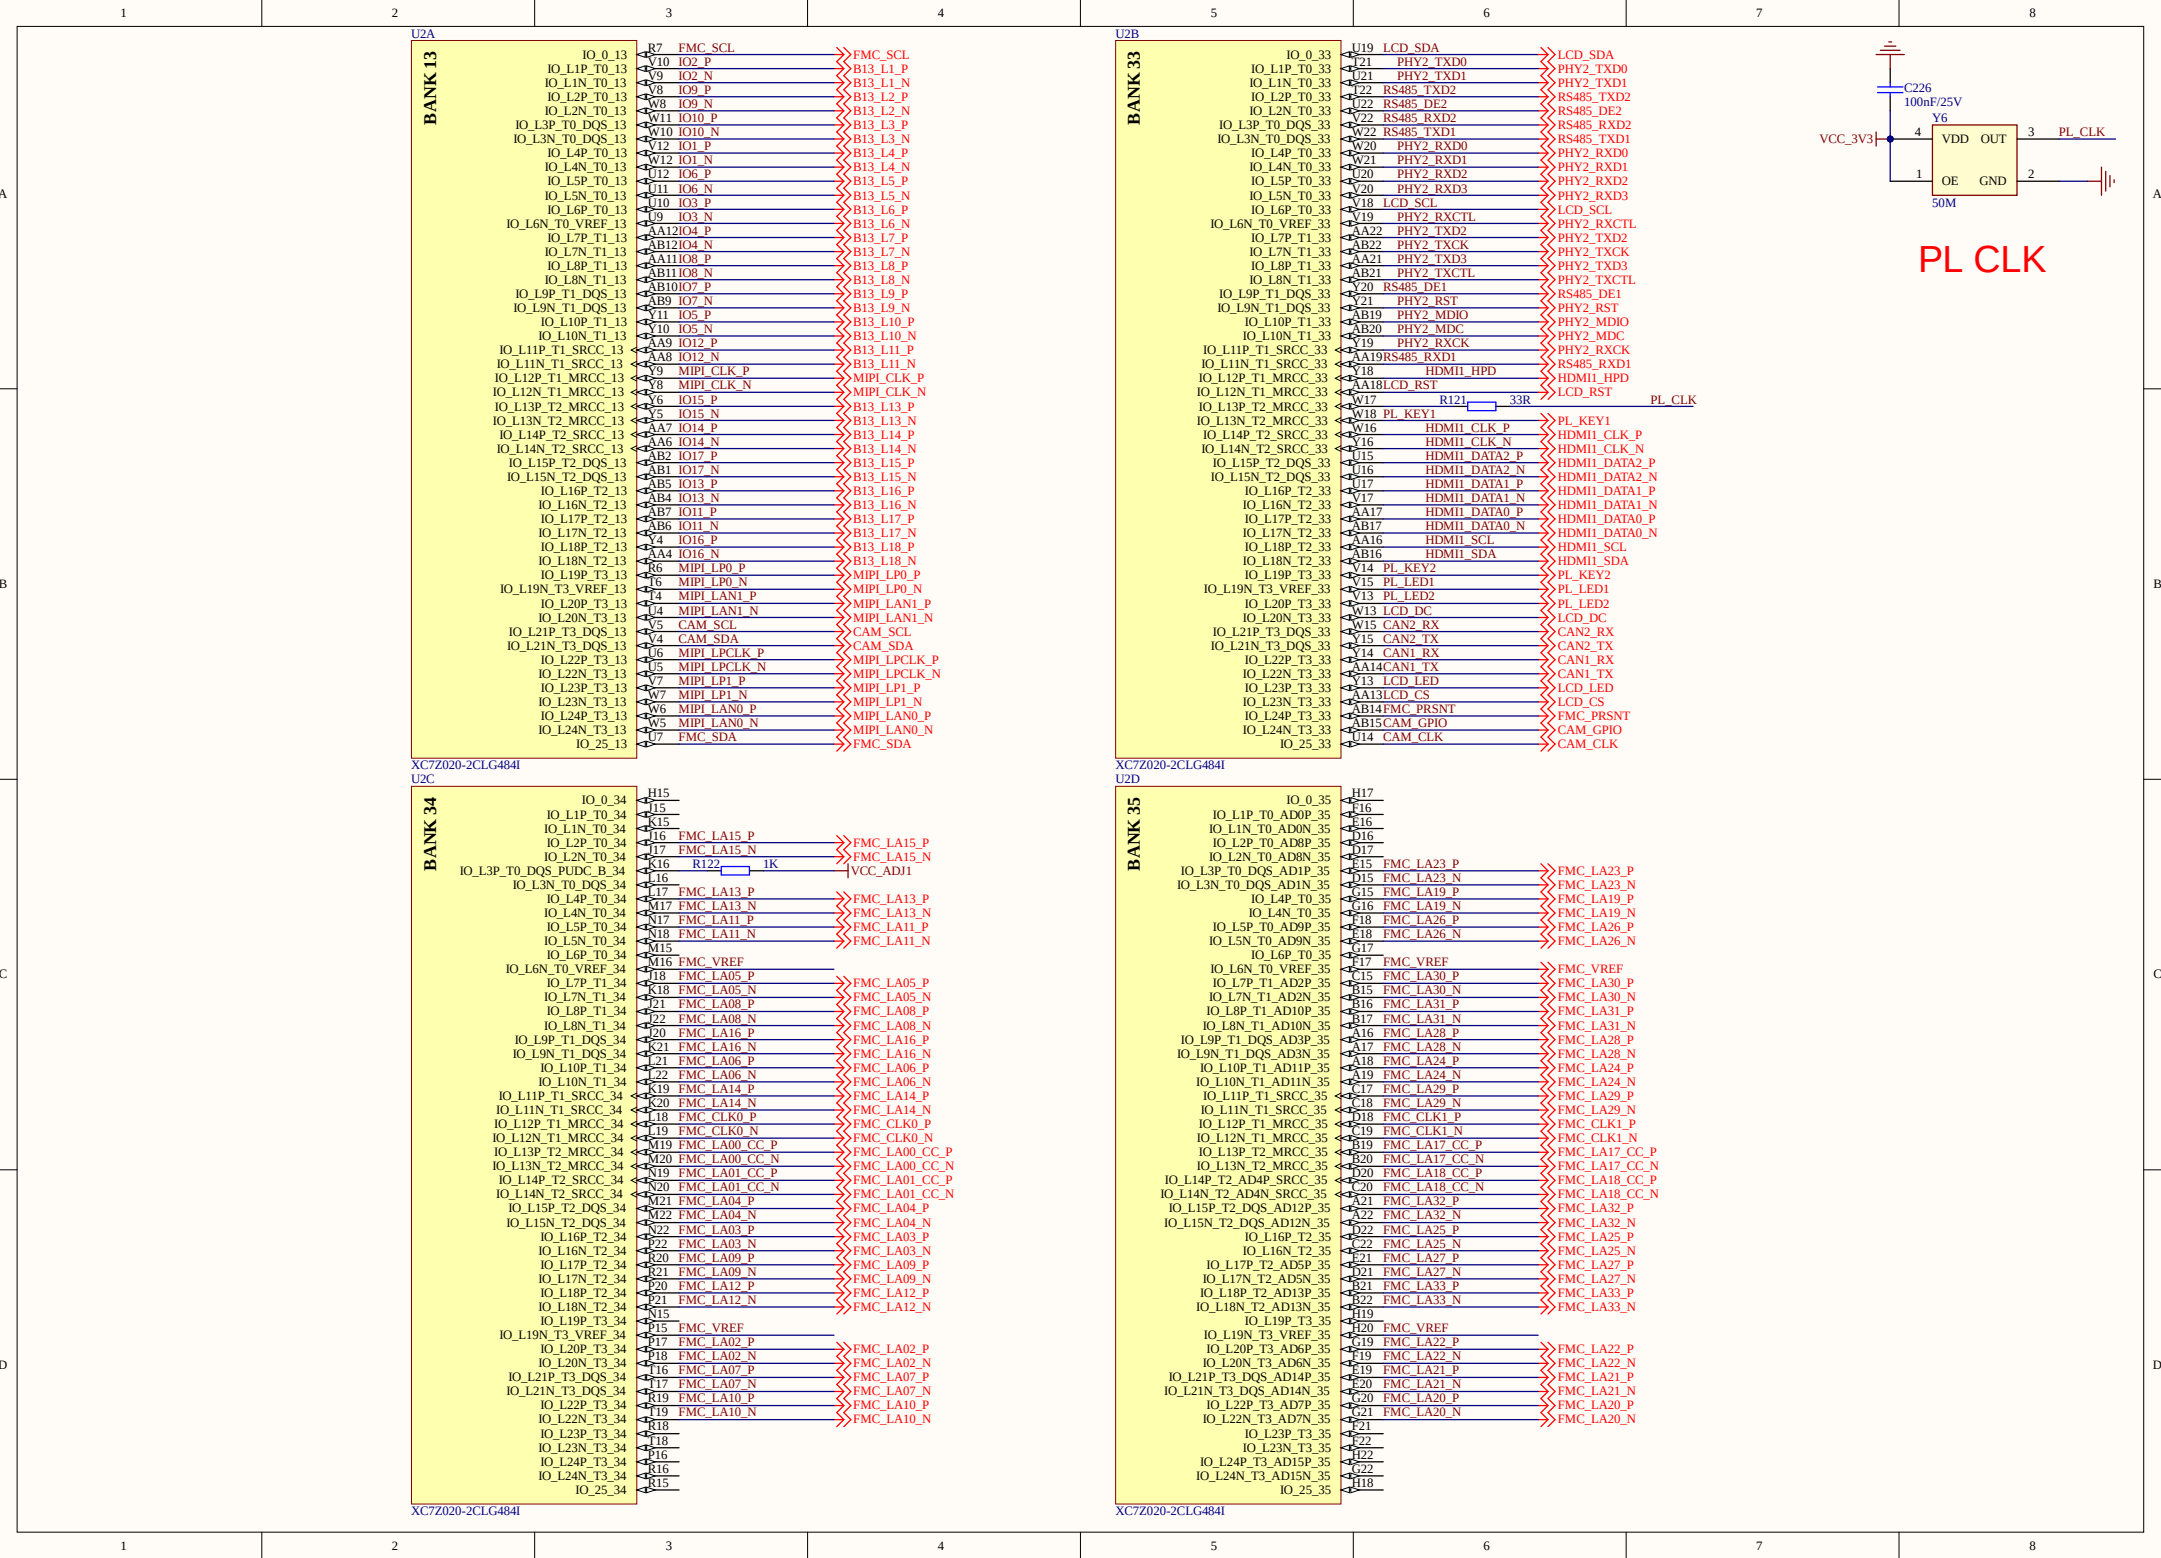

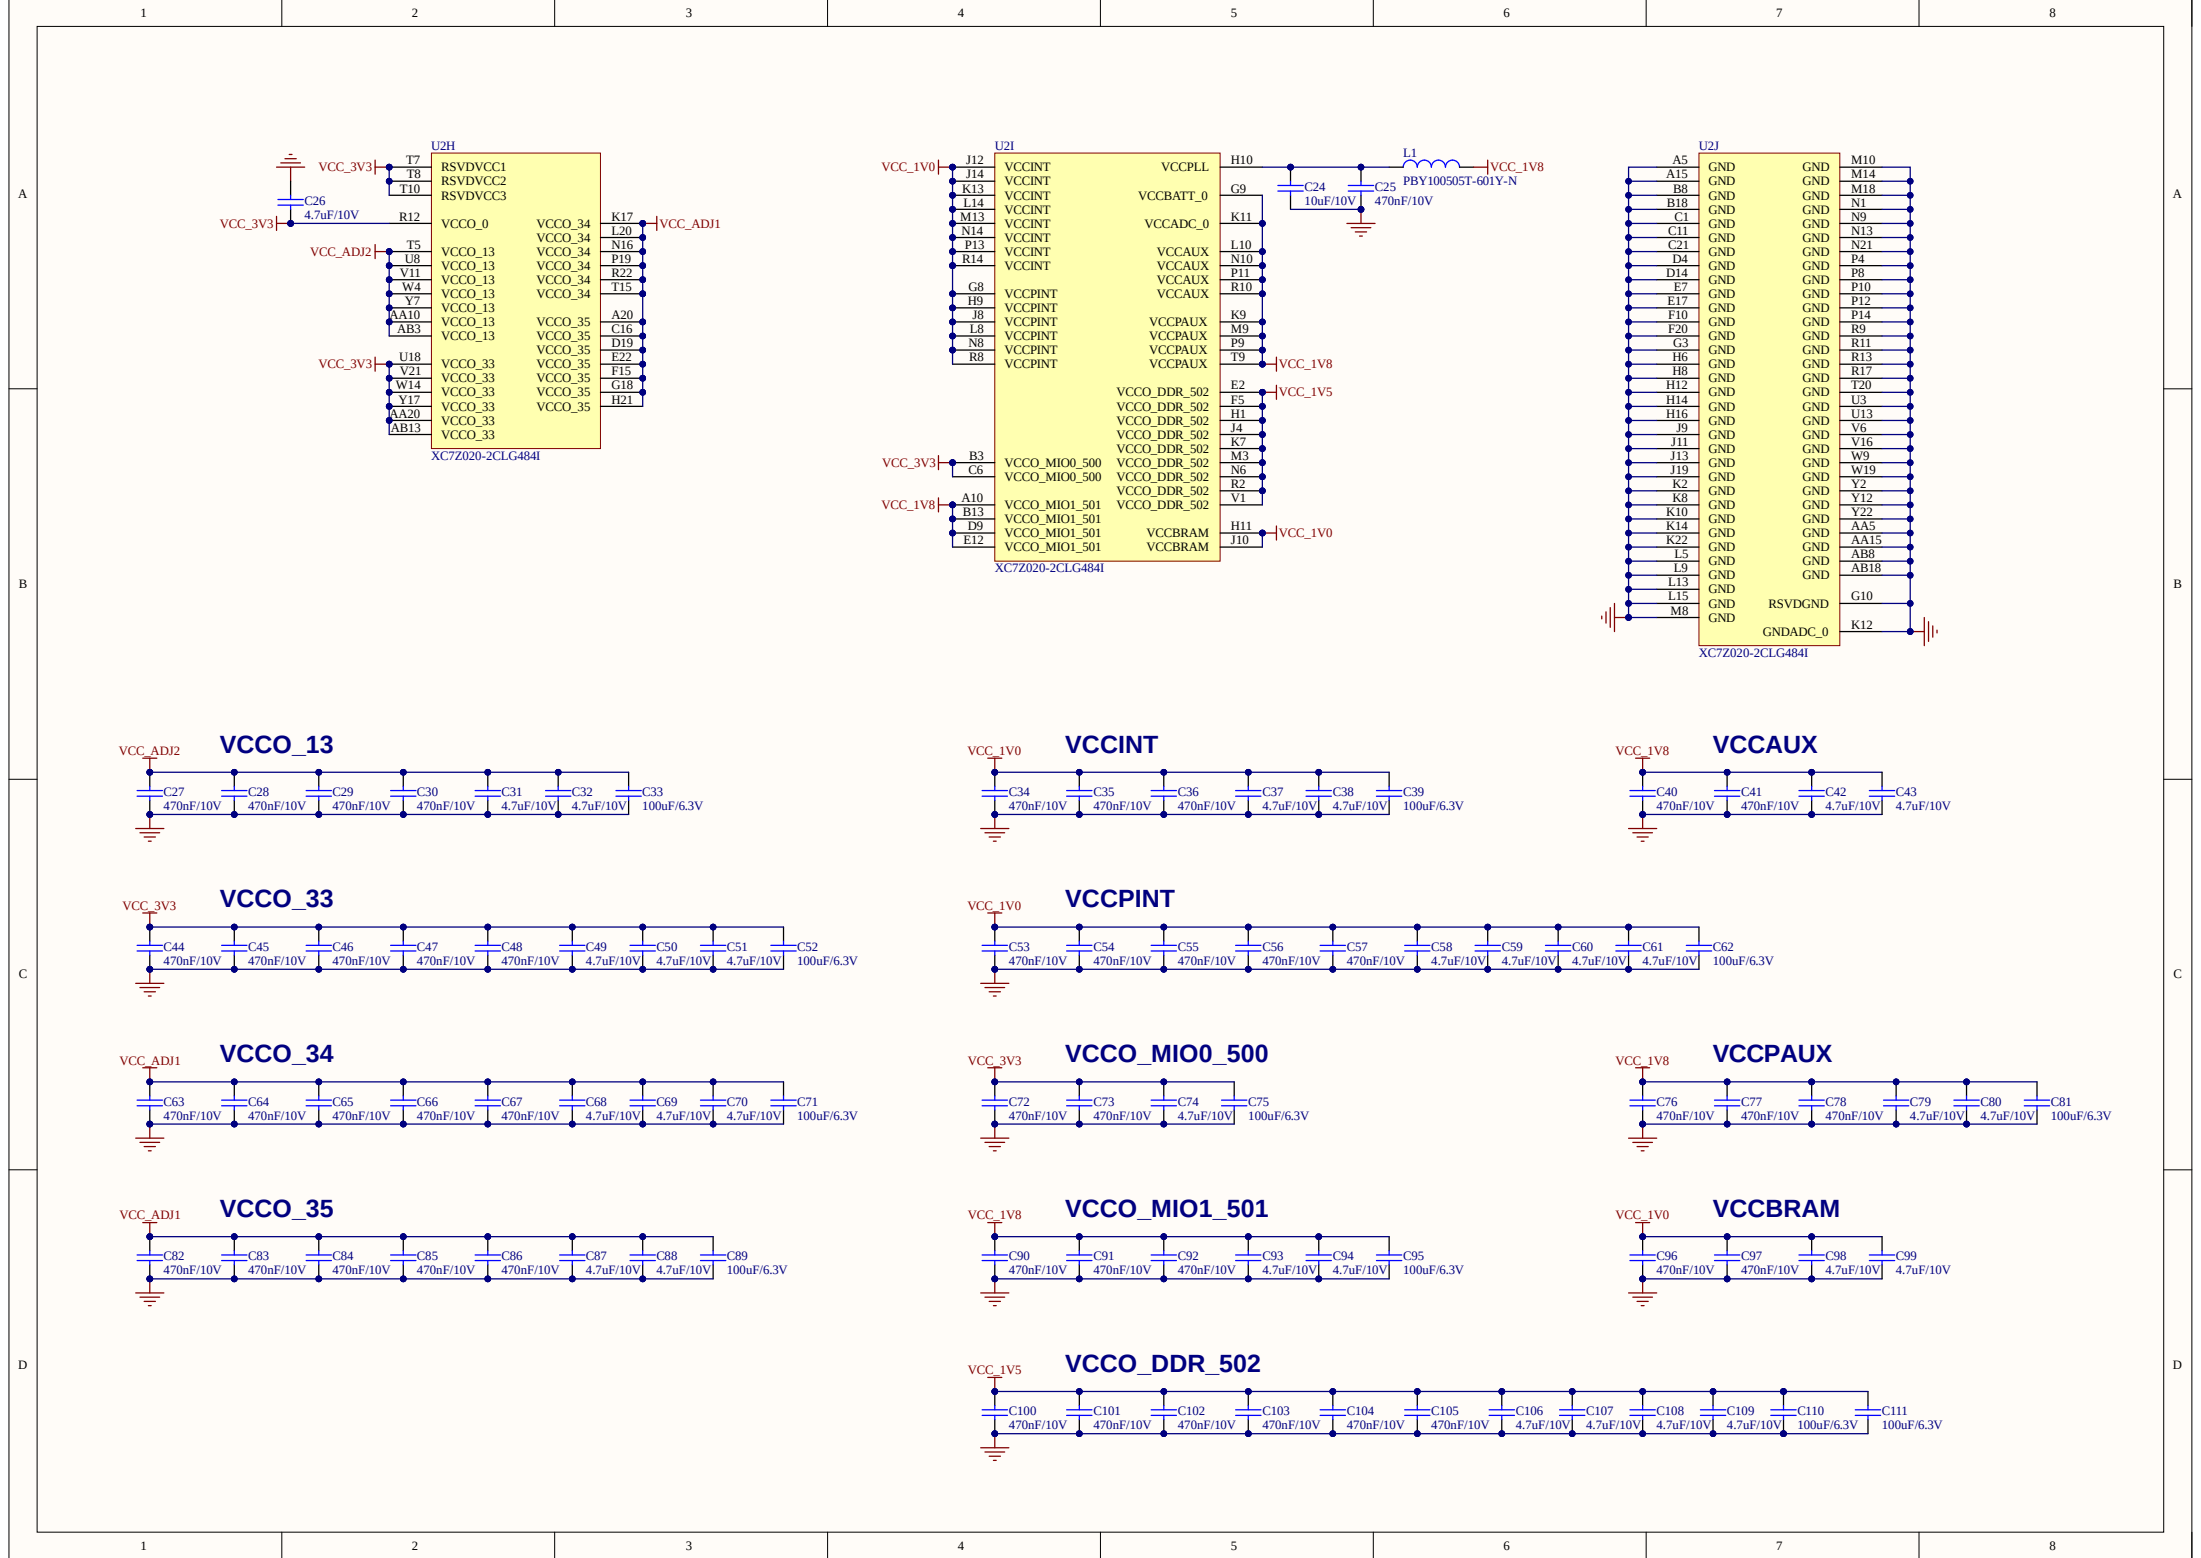

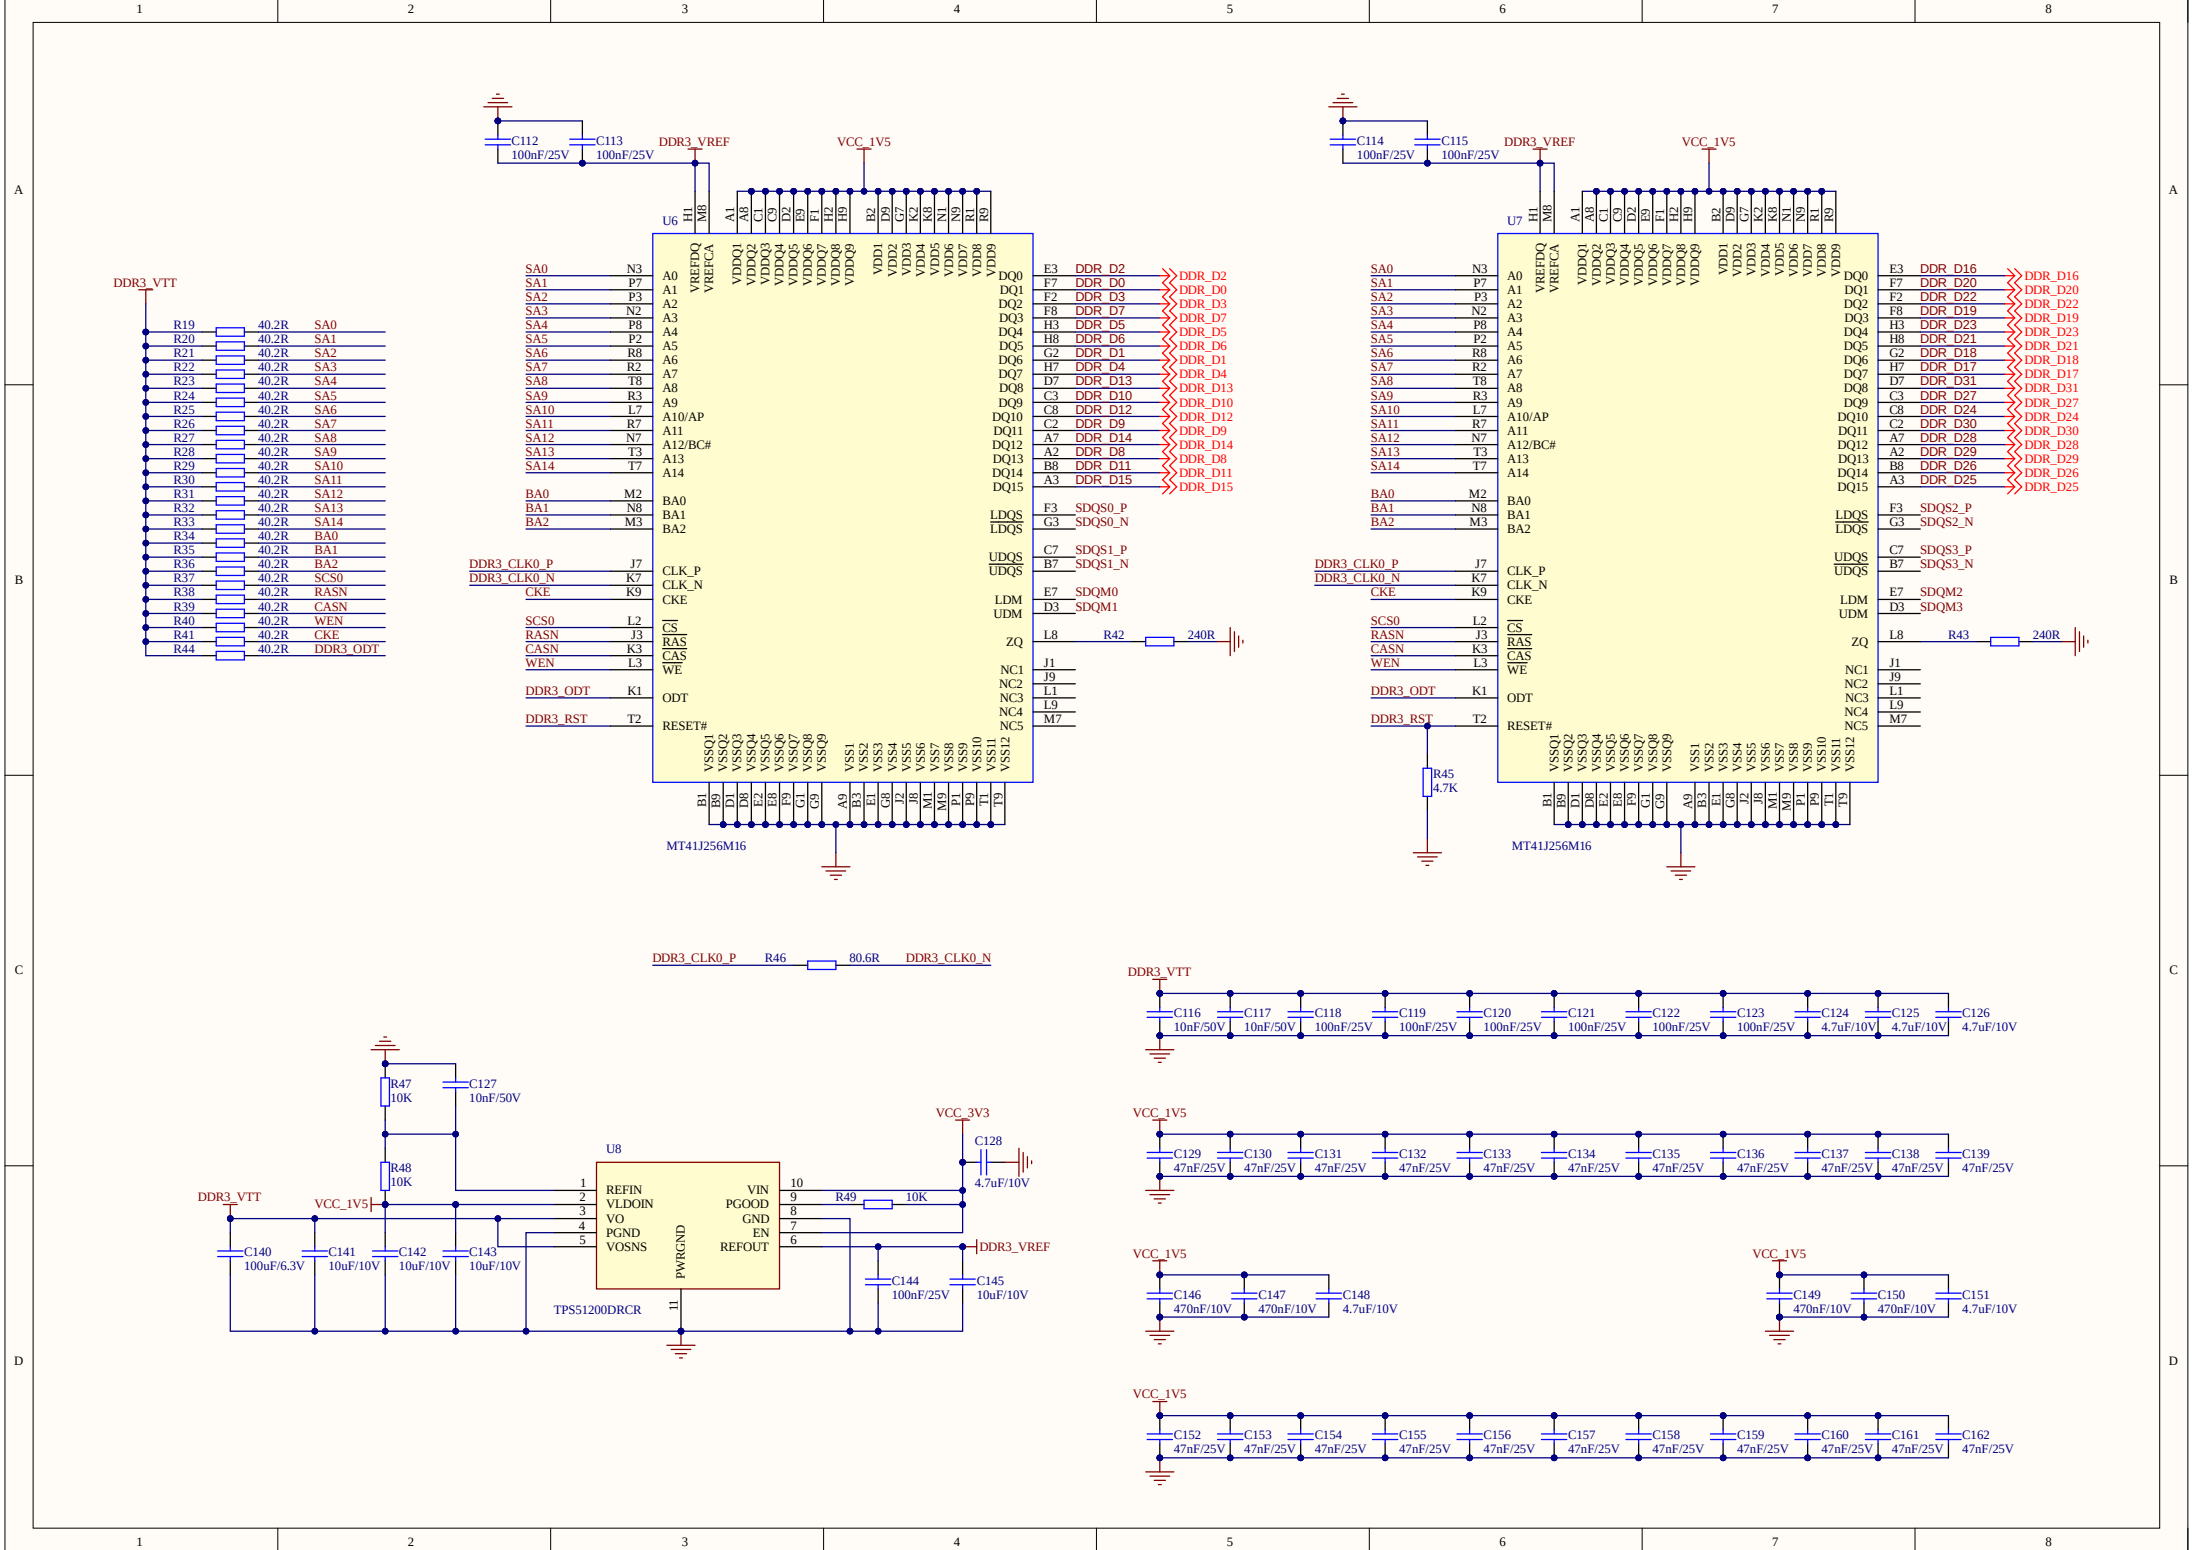

A

B

C


D

A




B

C



D

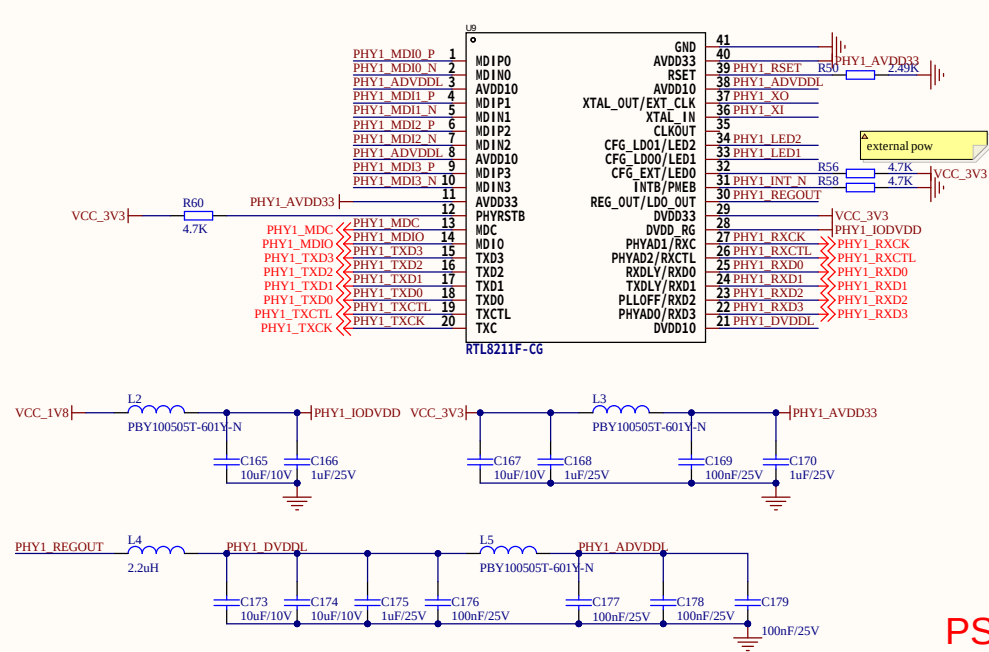


PS ETH





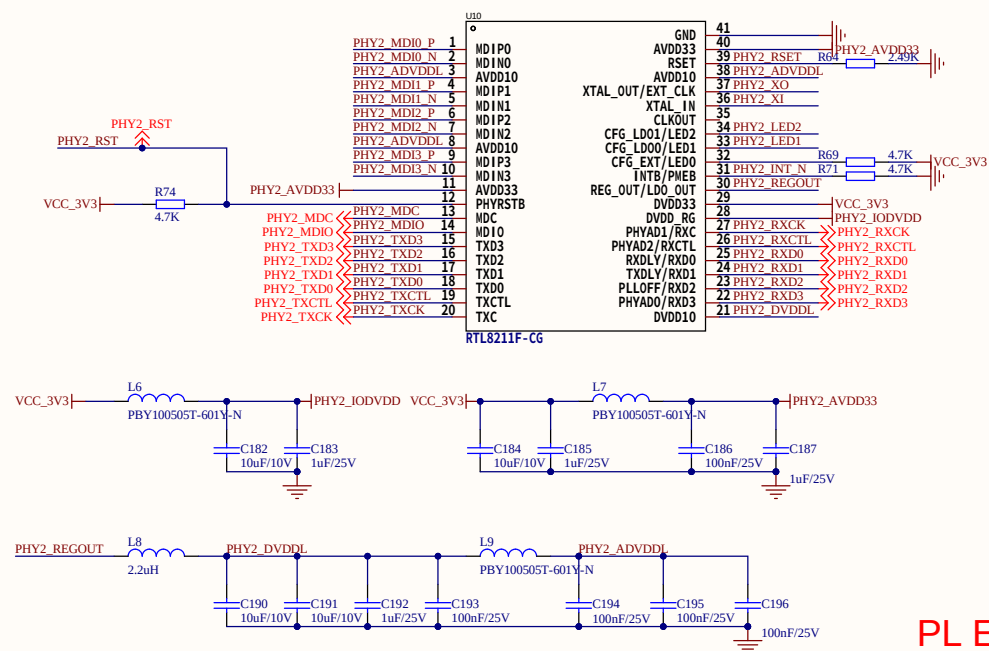
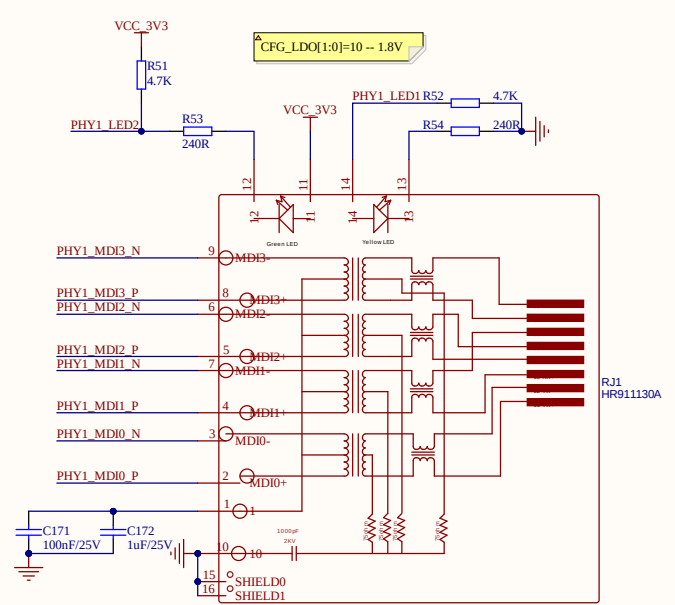
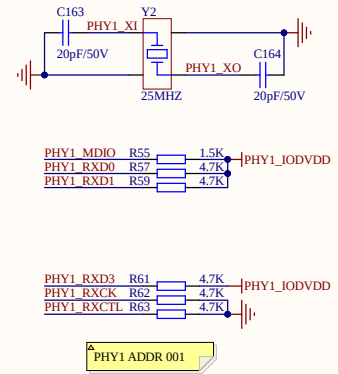


PL ETH



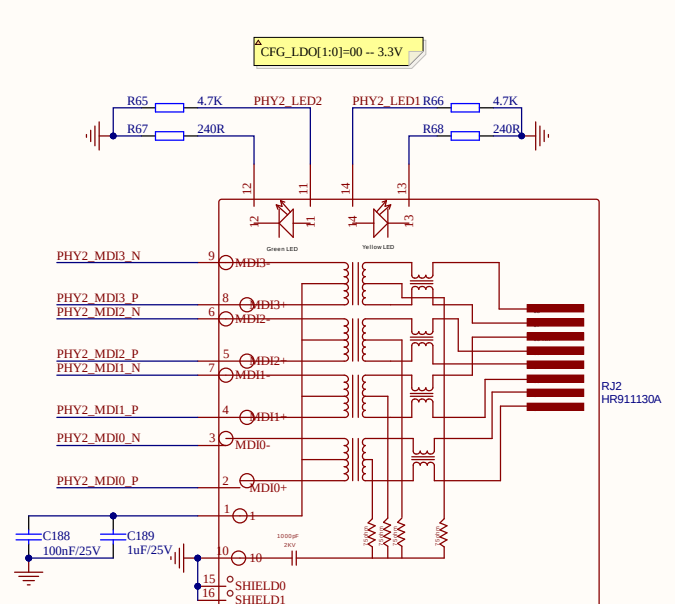
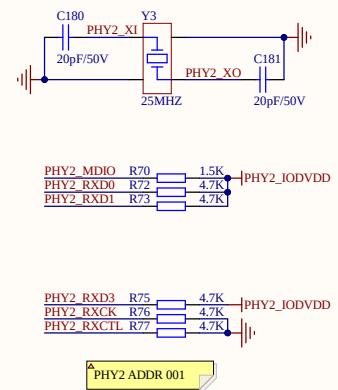




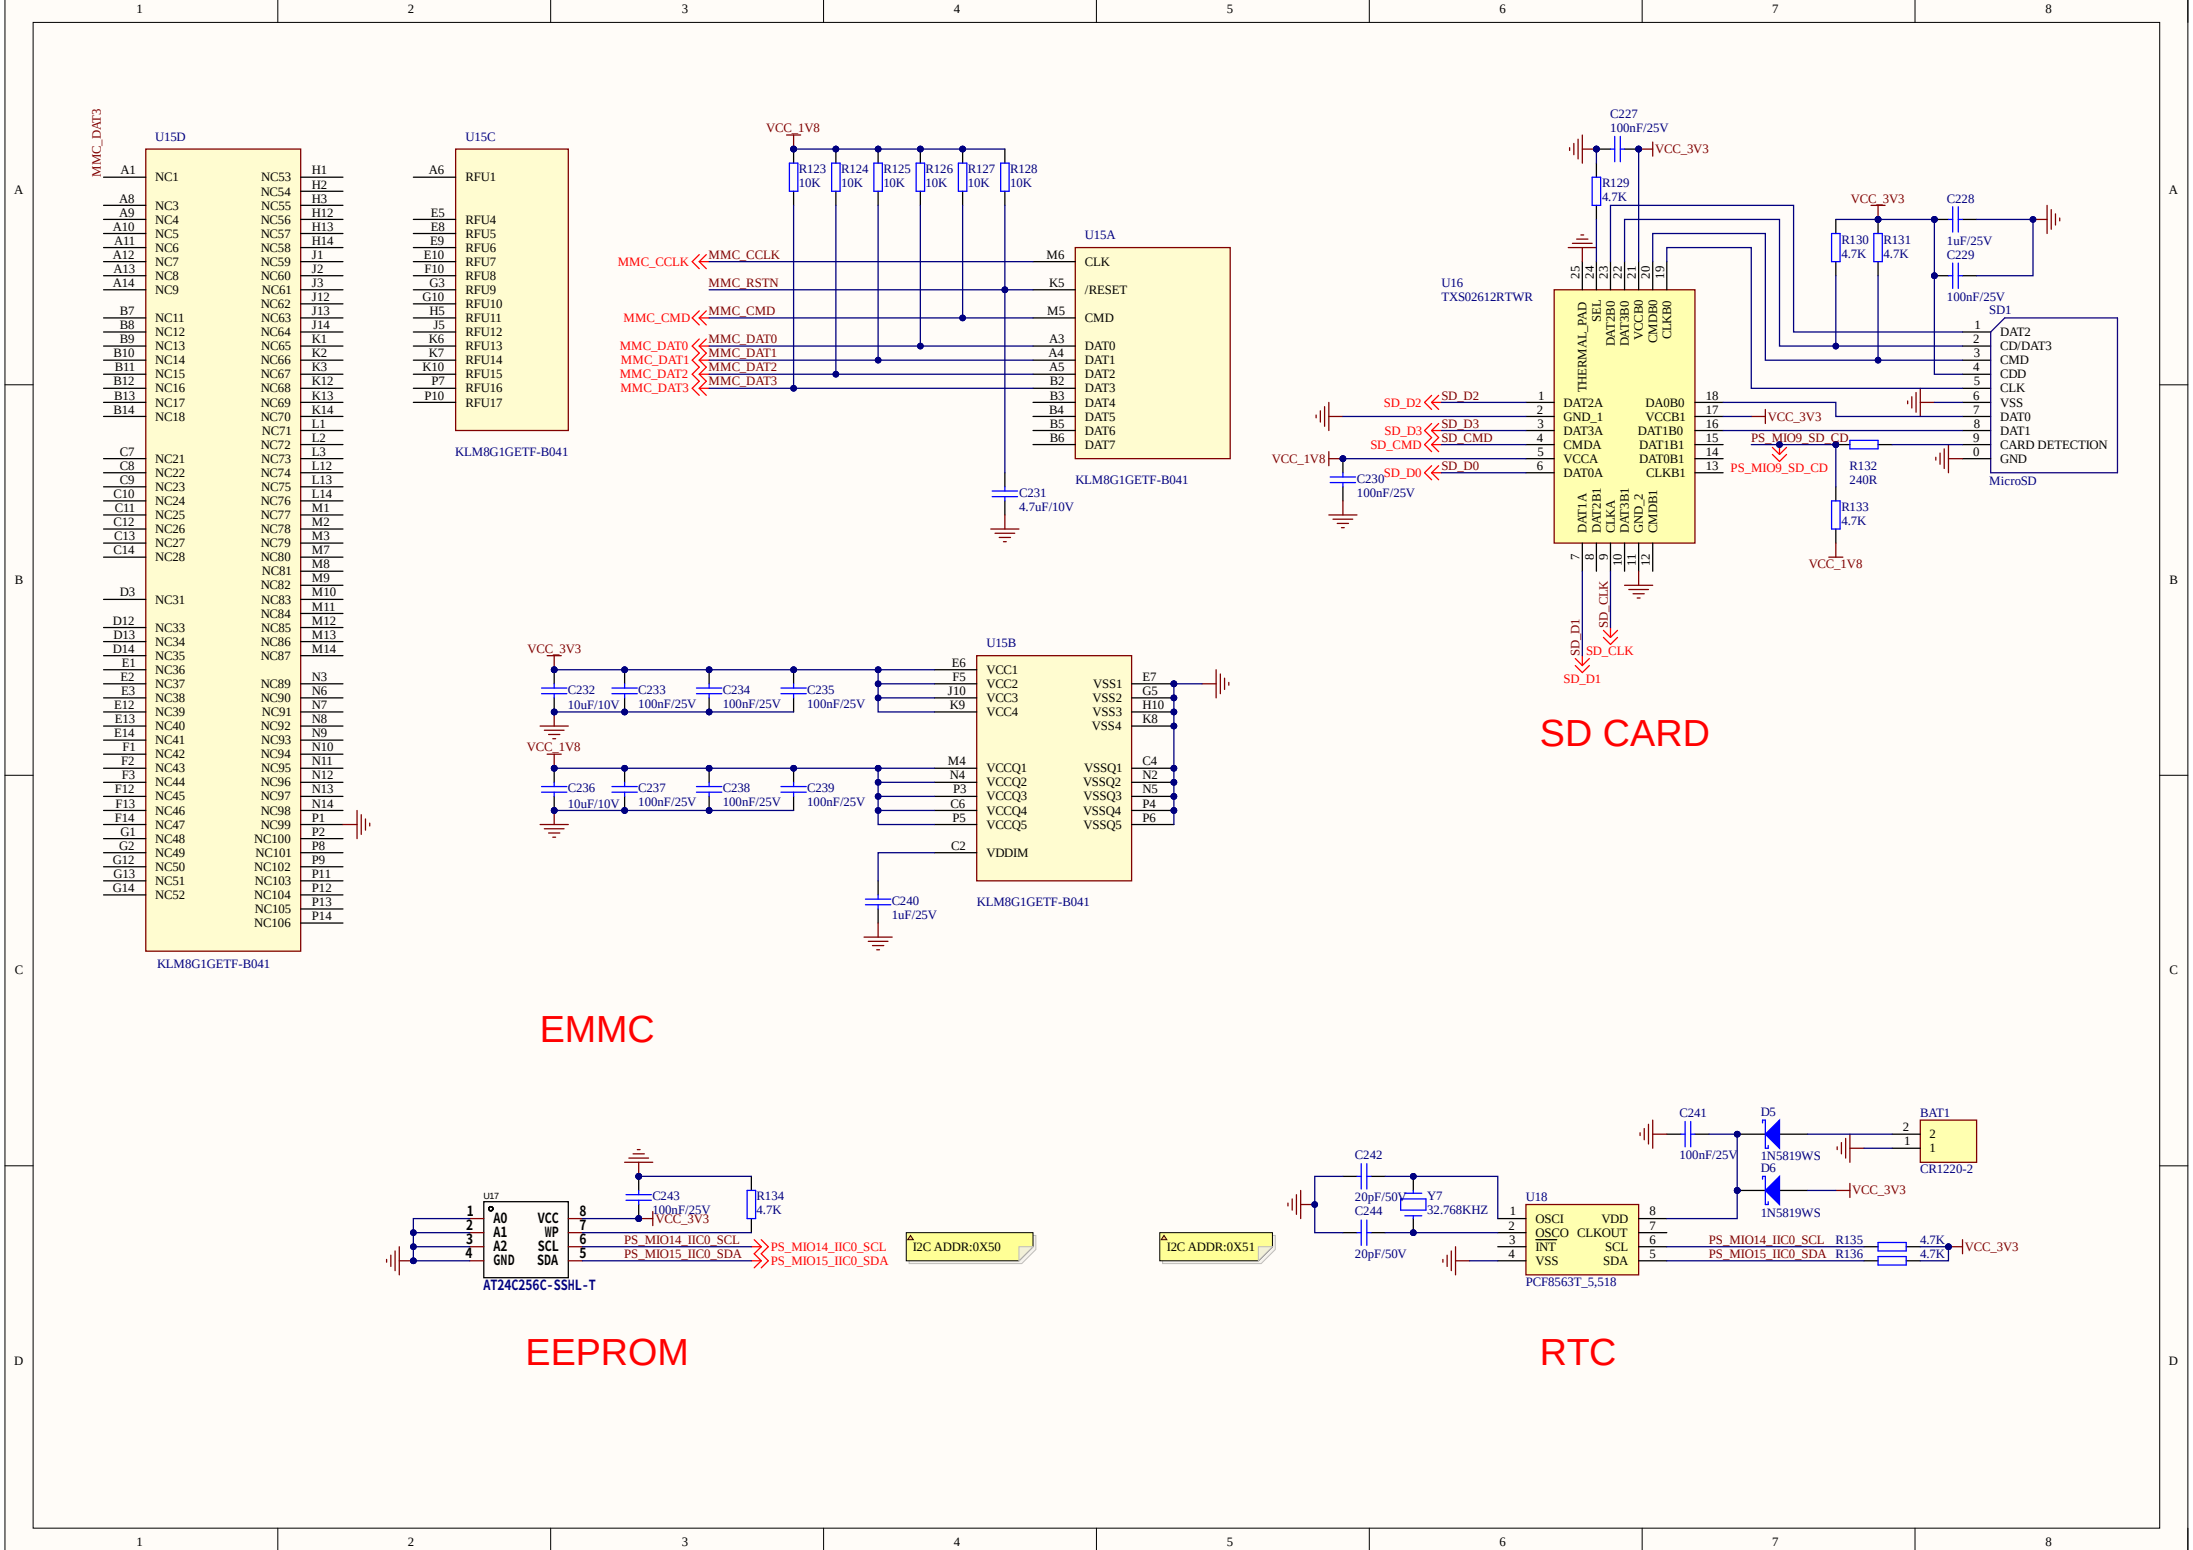

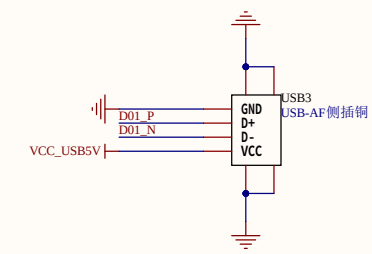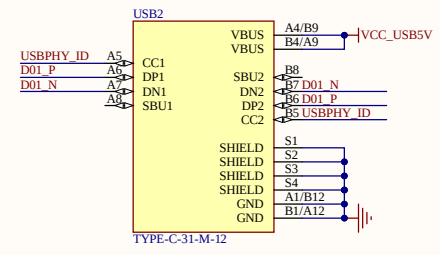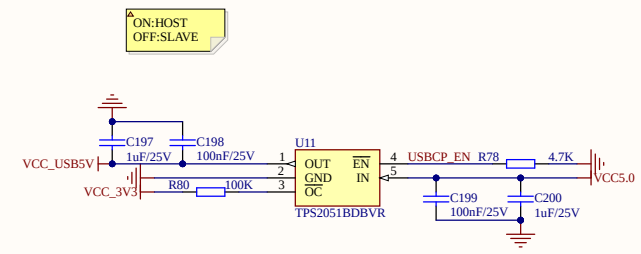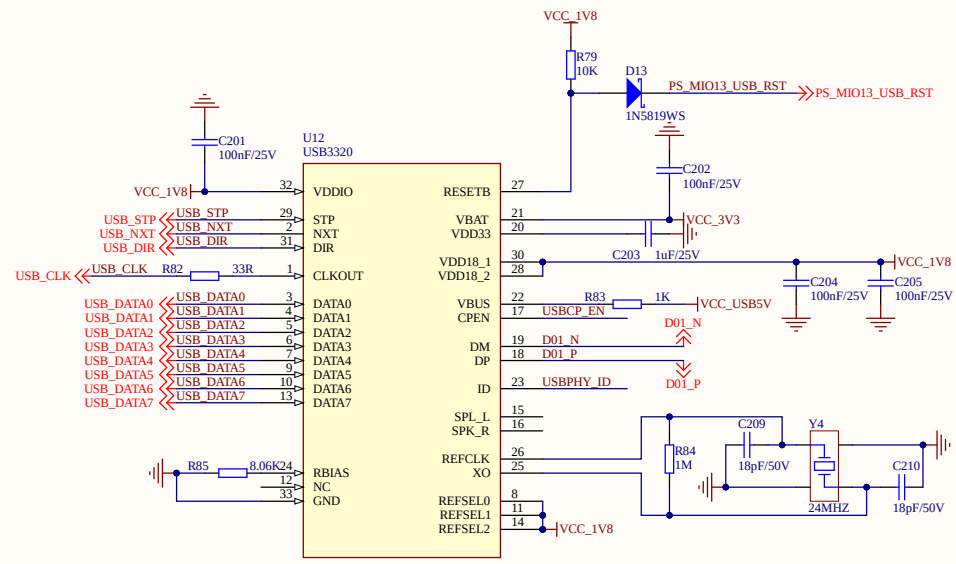

HDMI1  
HDMI\_A

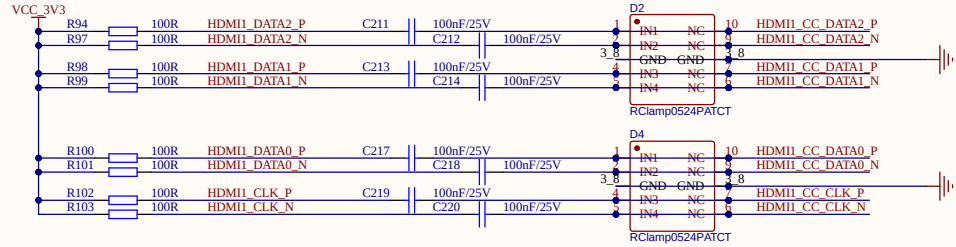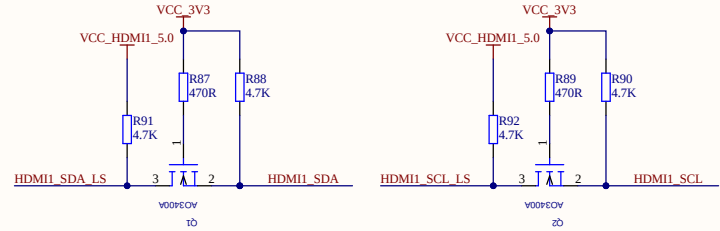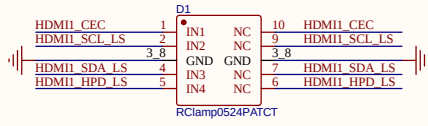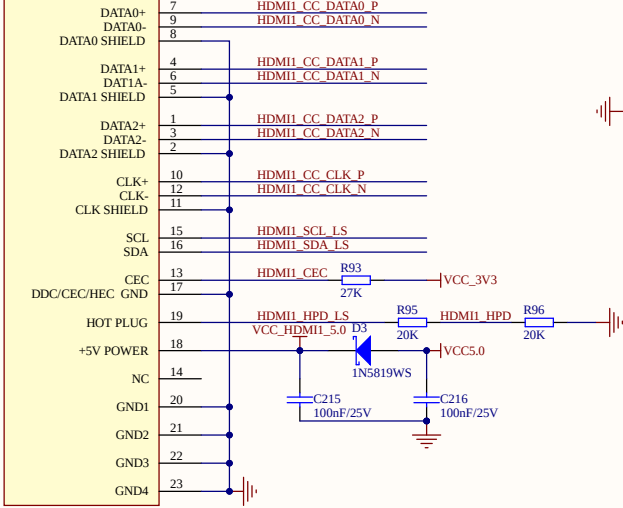

A

B

C


D

A


B

C


D

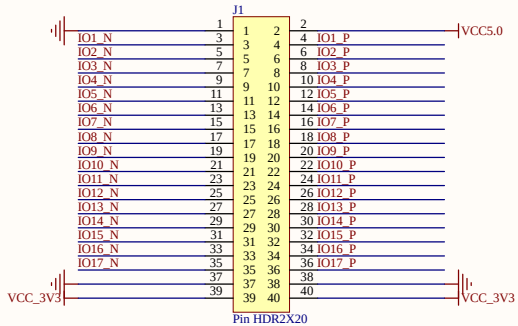


40PIN IO


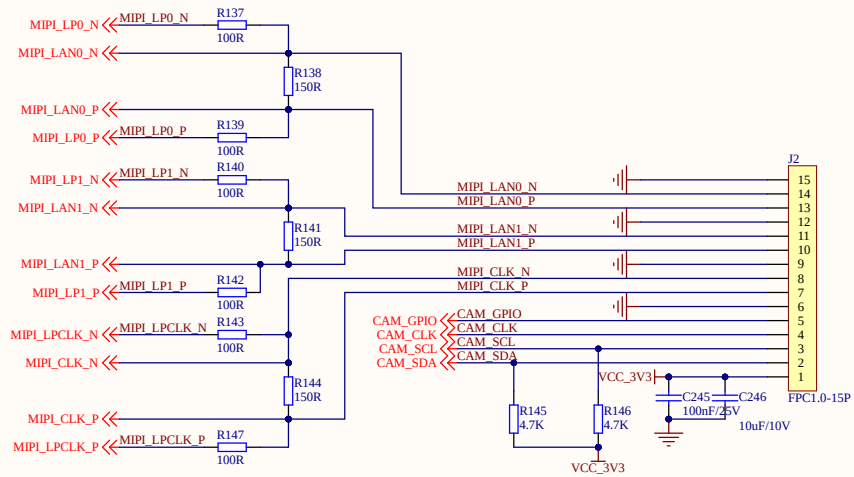


MIPI CSI




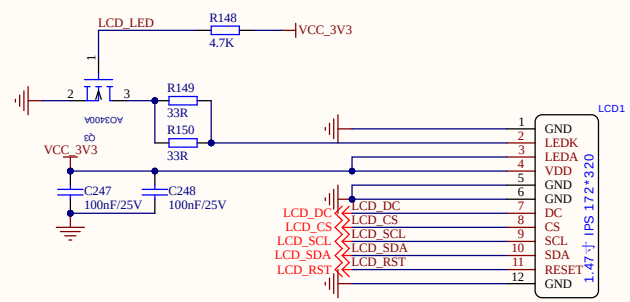


LCD


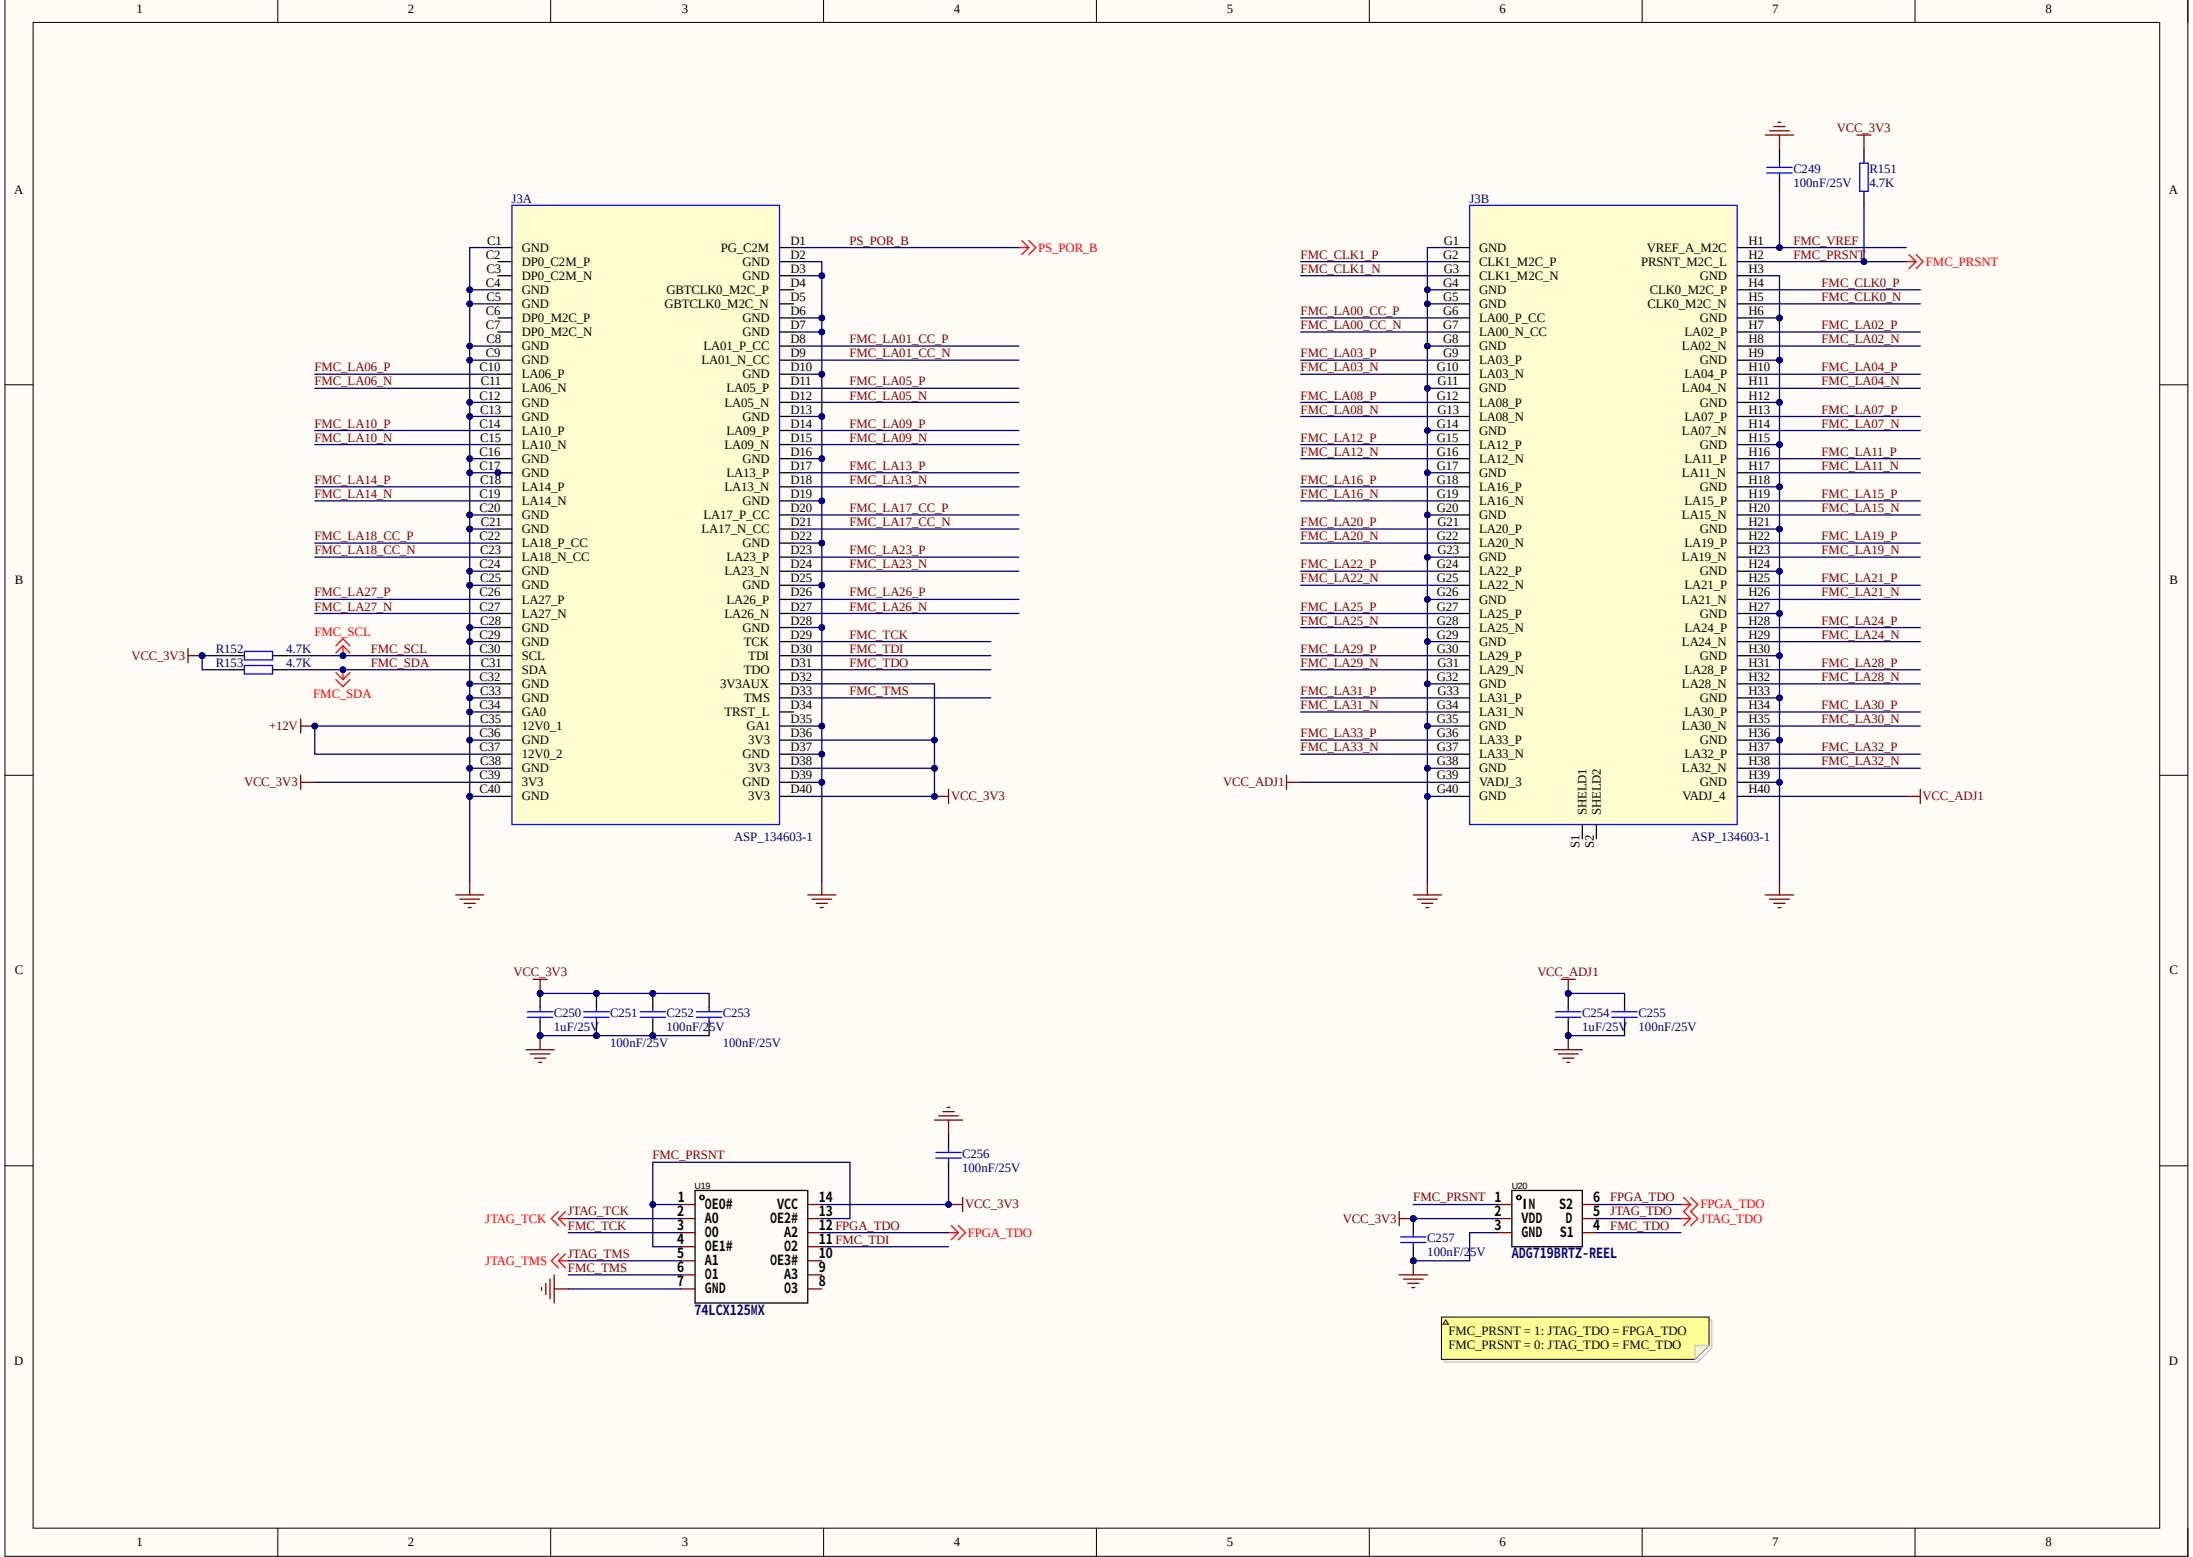







KEY

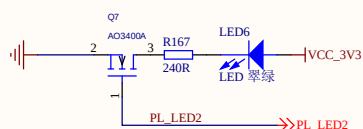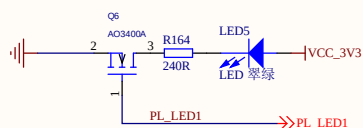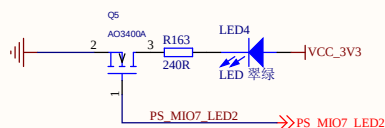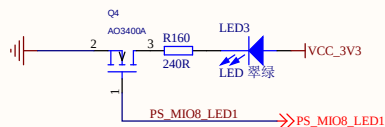


LED


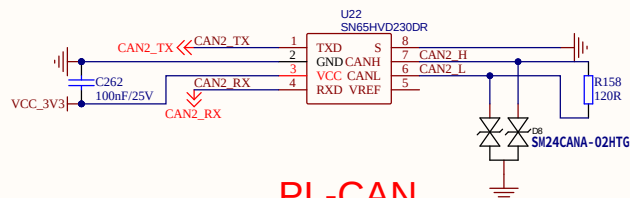
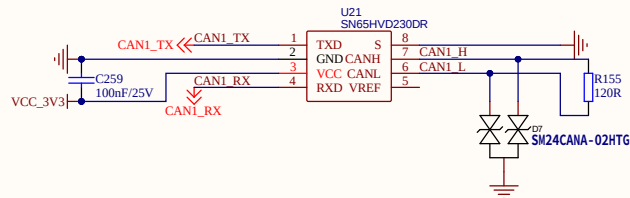


PL-CAN

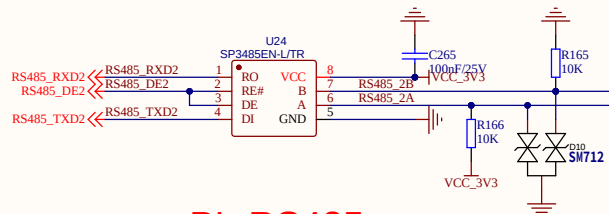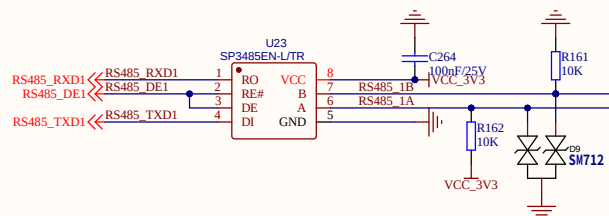

PL-RS485



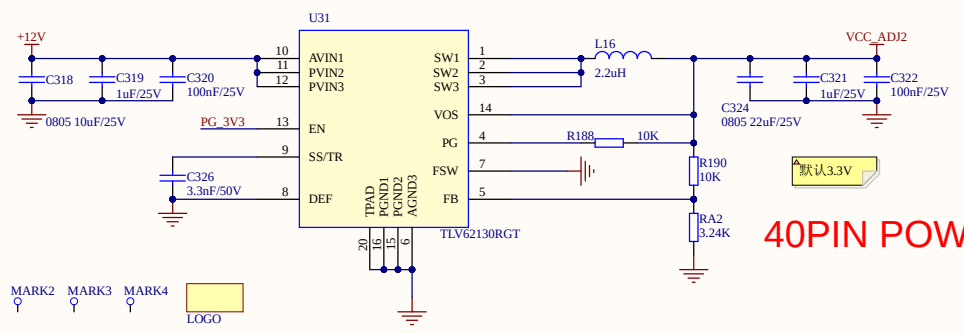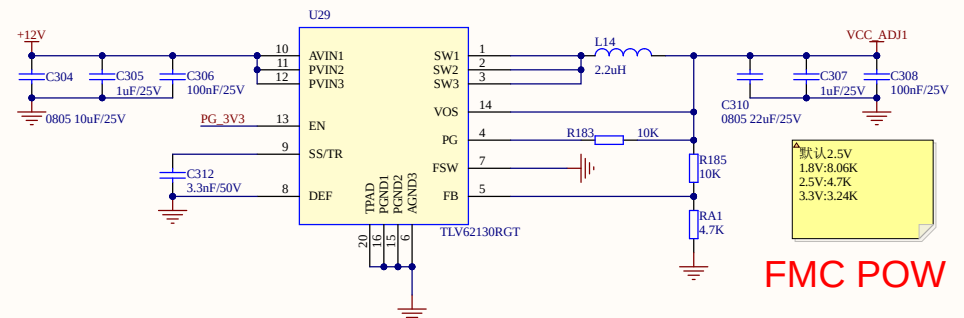

FMC POW

## 40PIN POW