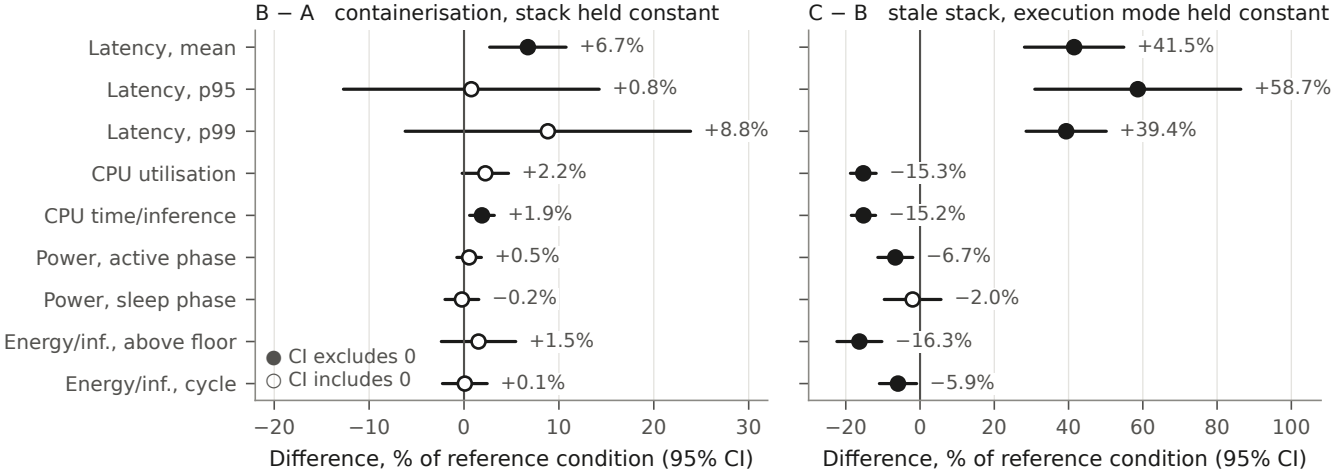
B − A containerisation, stack held constant
C − B stale stack, execution mode held constant
Latency, mean
Latency, p95
Latency, p99
CPU utilisation
CPU time/inference
Power, active phase
Power, sleep phase
Energy/inf., above floor
Energy/inf., cycle
+6.7%
+0.8%
+8.8%
+2.2%
+1.9%
+0.5%
−0.2%
+1.5%
+0.1%
+41.5%
+58.7%
+39.4%
−15.3%
−15.2%
−6.7%
−2.0%
−16.3%
−5.9%
CI excludes 0
CI includes 0
−20
−10
0
10
20
30
40
60
80
100
Difference, % of reference condition (95% CI)
Difference, % of reference condition (95% CI)