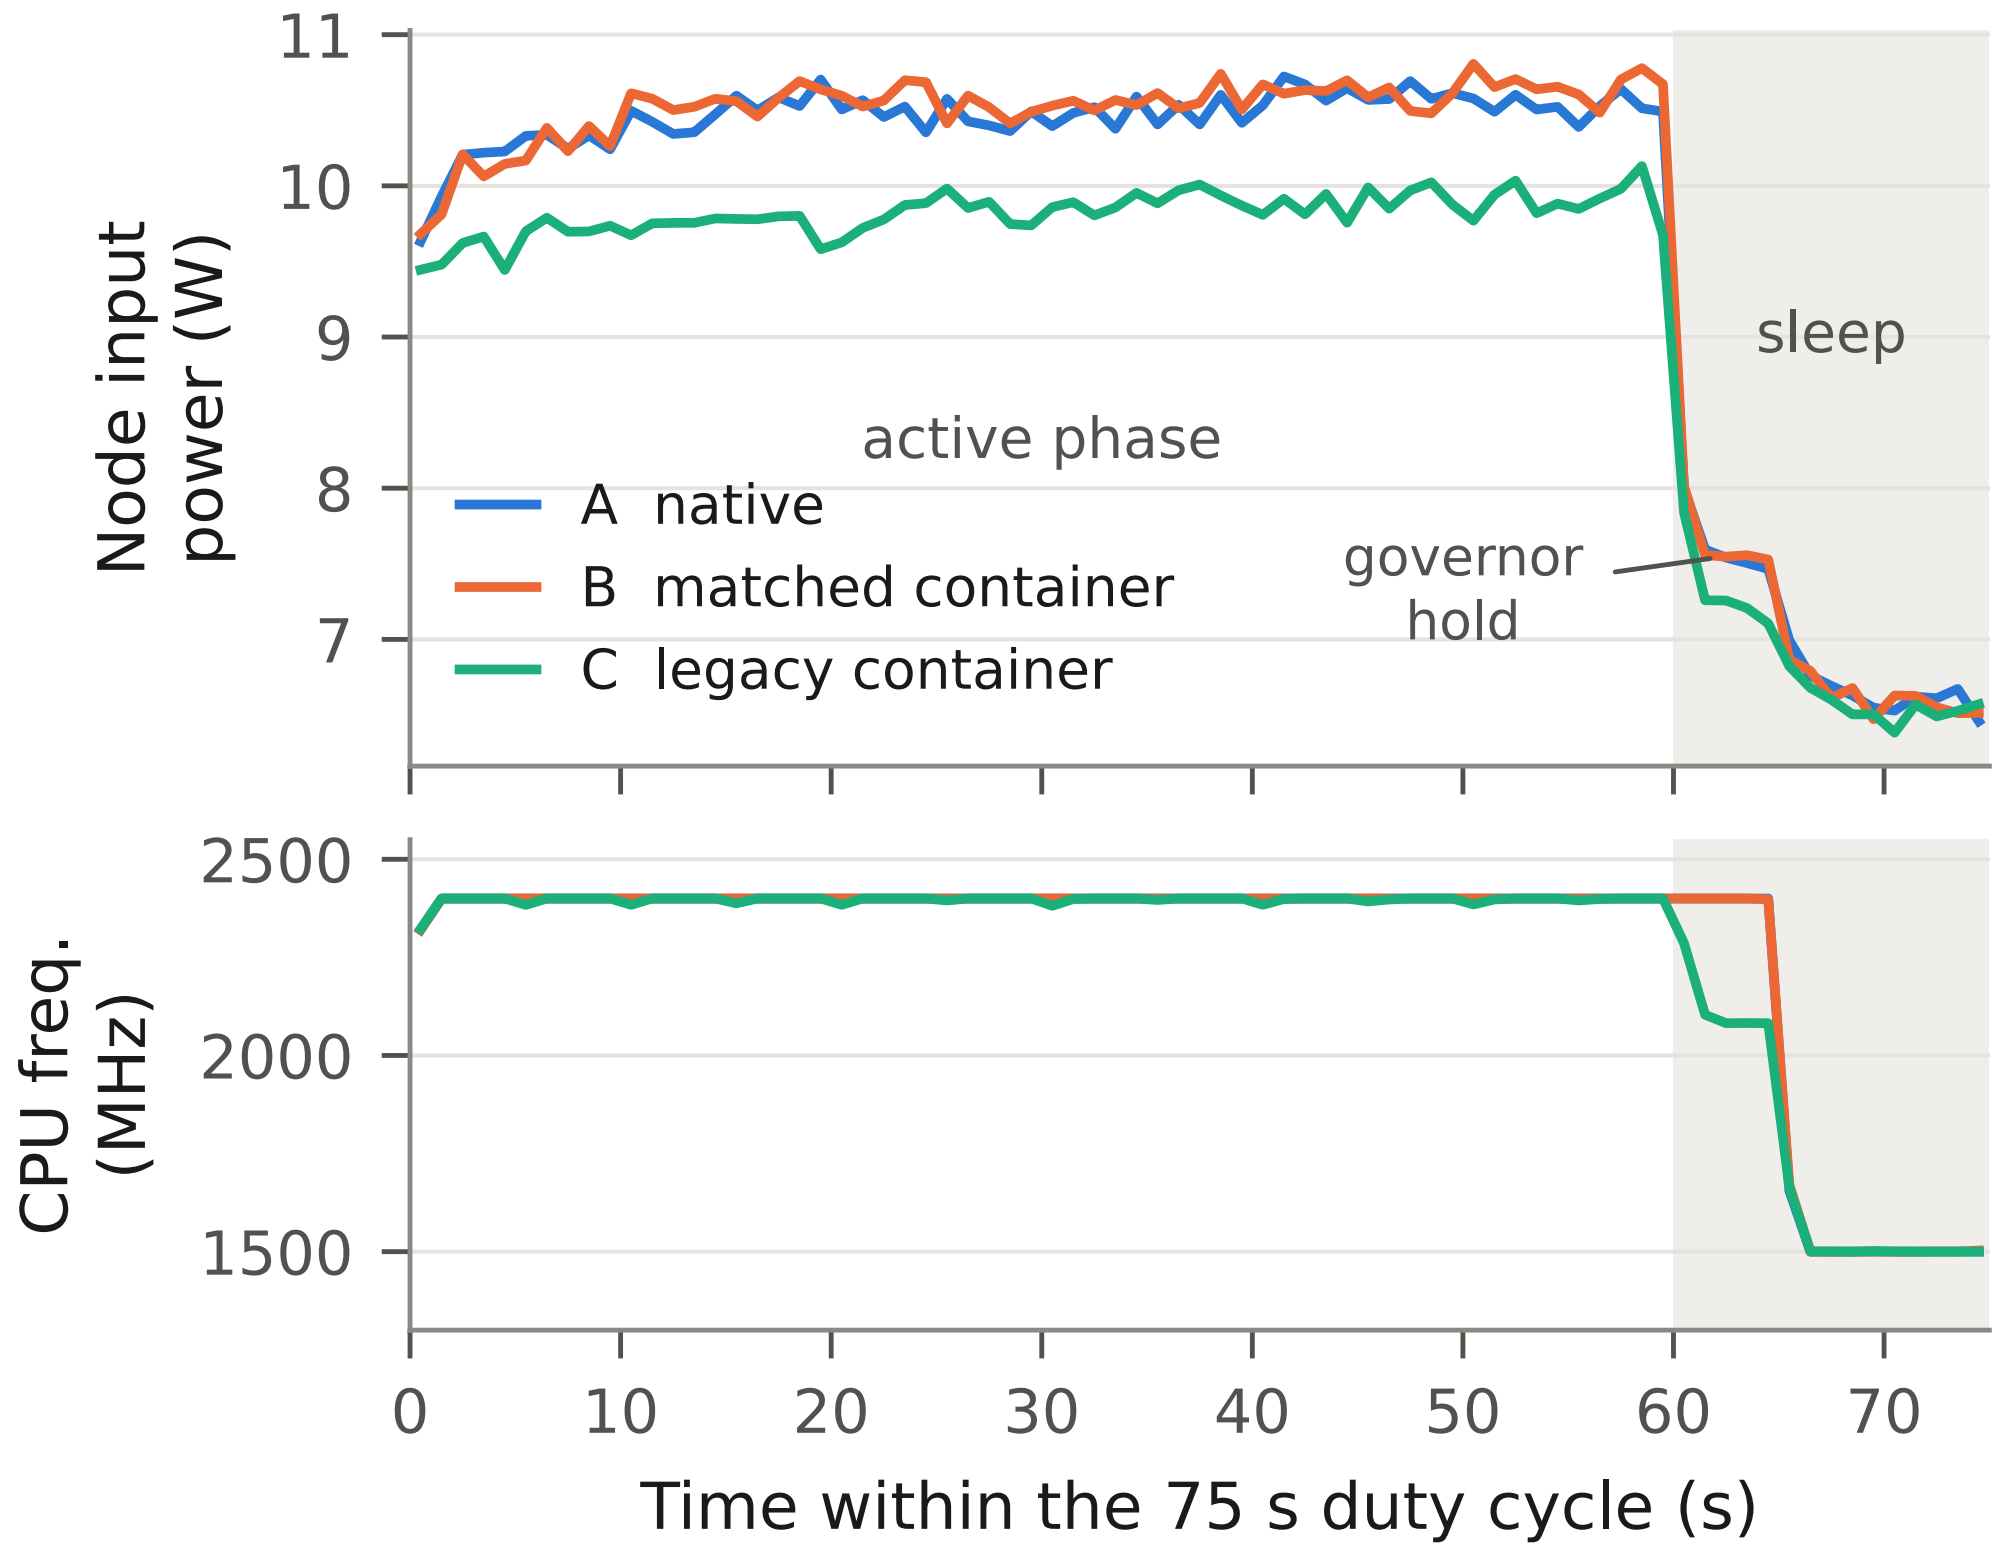
Node input power (W)
11
10
9
8
7
active phase
sleep
A native
B matched container
C legacy container
governor hold
CPU freq. (MHz)
2500
2000
1500
0
10
20
30
40
50
60
70
Time within the 75 s duty cycle (s)