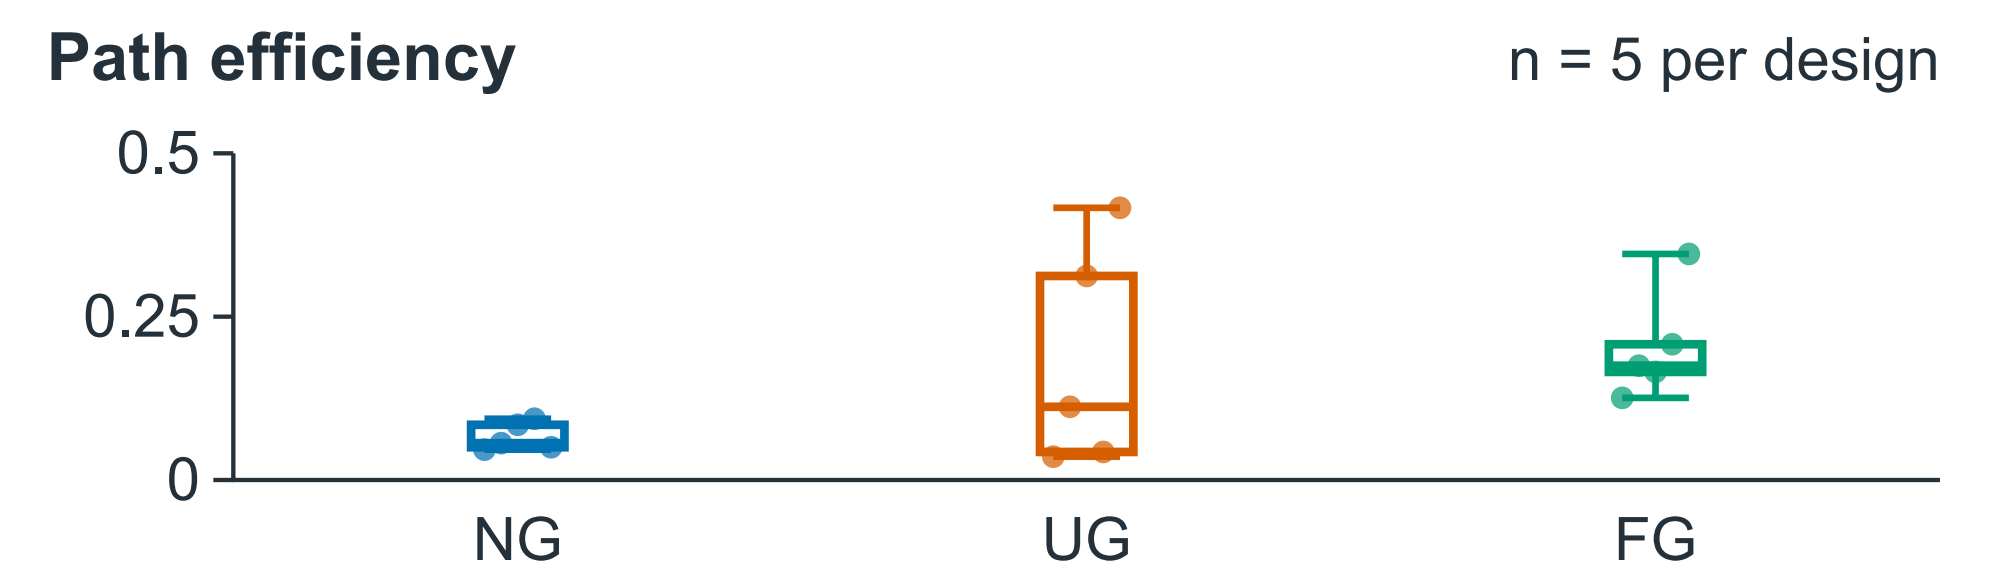
Path efficiency
n = 5 per design
0.5
0.25
0
NG
UG
FG