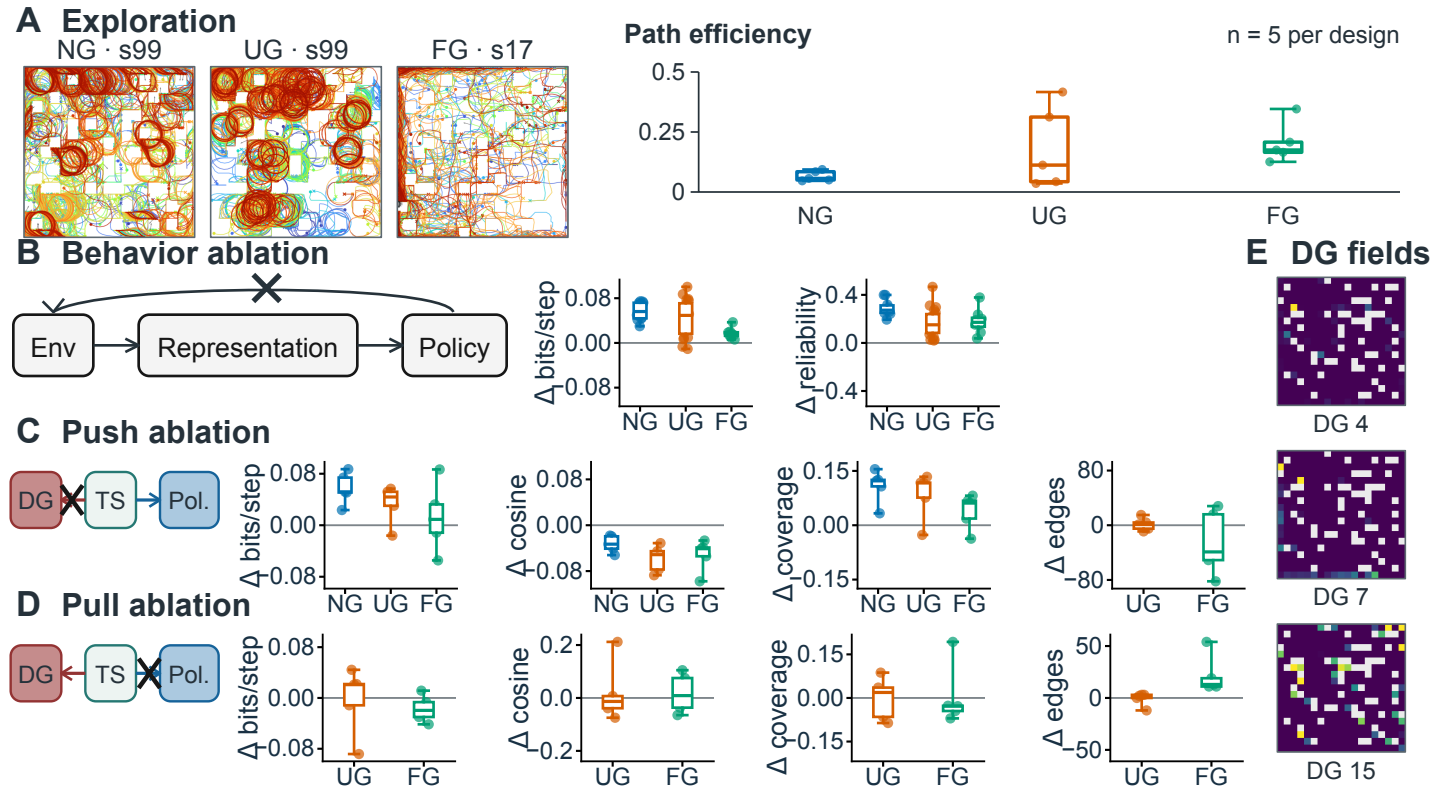

A Exploration
NG · s99
UG · s99
FG · s17
Path efficiency
n = 5 per design
0.5
0.25
0
NG
UG
FG
B Behavior ablation
Env
Representation
Policy
Δ bits/step
0.08
0.00
−0.08
Δ reliability
0.4
0.0
−0.4
NG UG FG
E DG fields
DG 4
C Push ablation
DG
TS
Pol.
Δ cosine
Δ coverage
0.15
0.00
−0.15
Δ edges
80
0
−80
UG FG
DG 7
D Pull ablation
0.2
0.0
−0.2
50
0
−50
DG 15