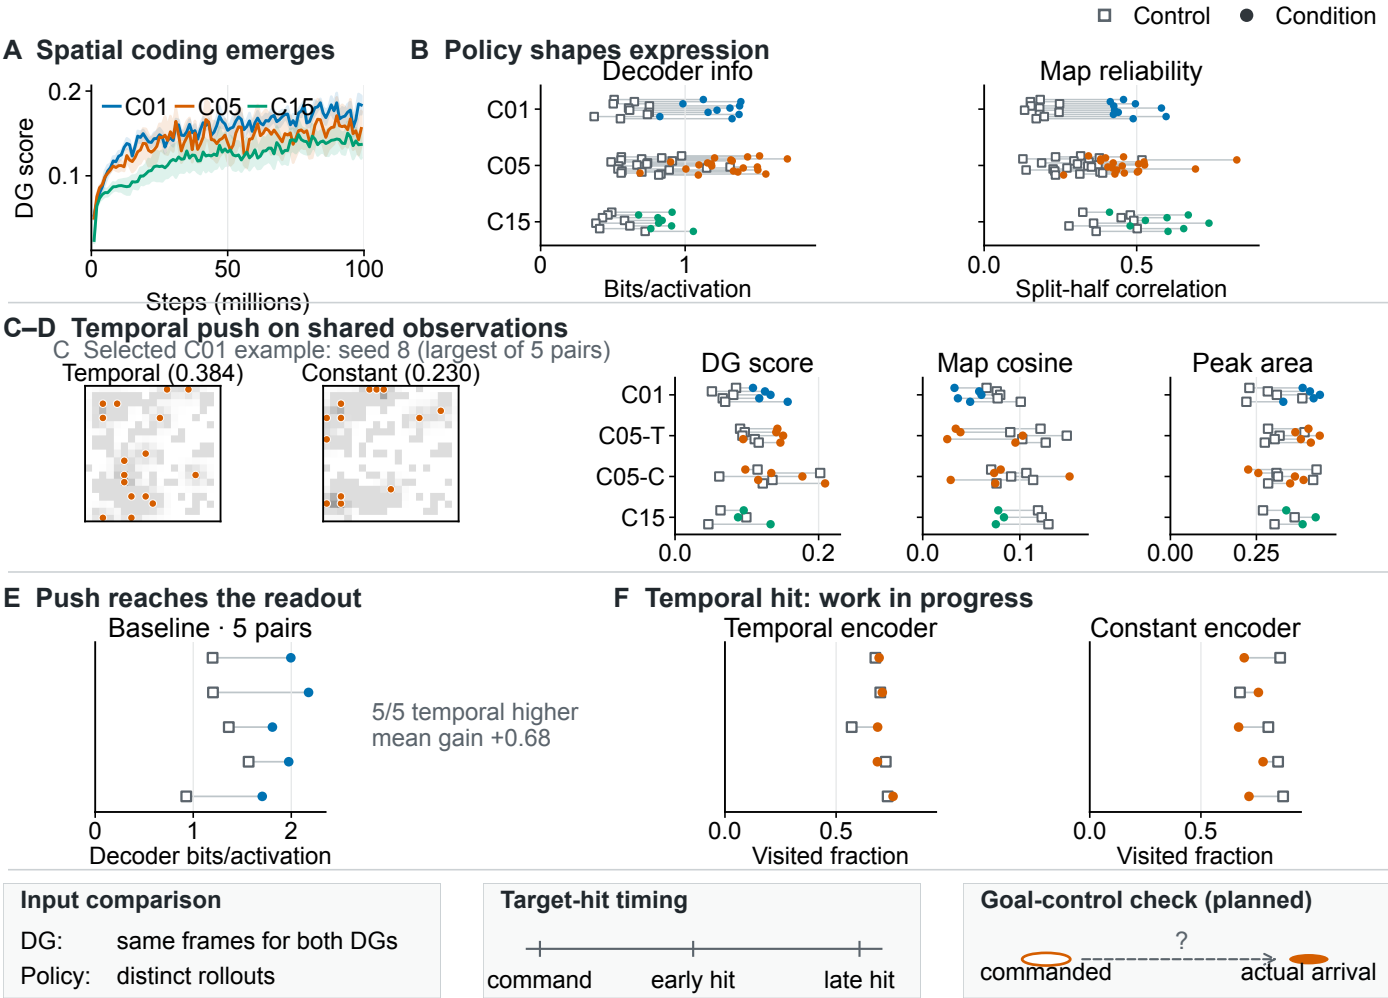

Control
Condition
A Spatial coding emerges
C01
C05
C15
DG score
0.2
0.1
0
50
100
Steps (millions)
B Policy shapes expression
Decoder info
C01
C05
C15
0
1
Bits/activation
Map reliability
0.0
0.5
Split-half correlation
C–D Temporal push on shared observations
C Selected C01 example: seed 8 (largest of 5 pairs)
Temporal (0.384)
Constant (0.230)
DG score
C01
C05-T
C05-C
C15
0.0
0.2
Map cosine
0.0
0.1
Peak area
0.00
0.25
E Push reaches the readout
Baseline · 5 pairs
0
1
2
Decoder bits/activation
5/5 temporal higher
mean gain +0.68
F Temporal hit: work in progress
Temporal encoder
0.0
0.5
Visited fraction
Constant encoder
0.0
0.5
Visited fraction
Input comparison
DG: same frames for both DGs
Policy: distinct rollouts
Target-hit timing
command
early hit
late hit
Goal-control check (planned)
?
commanded
actual arrival