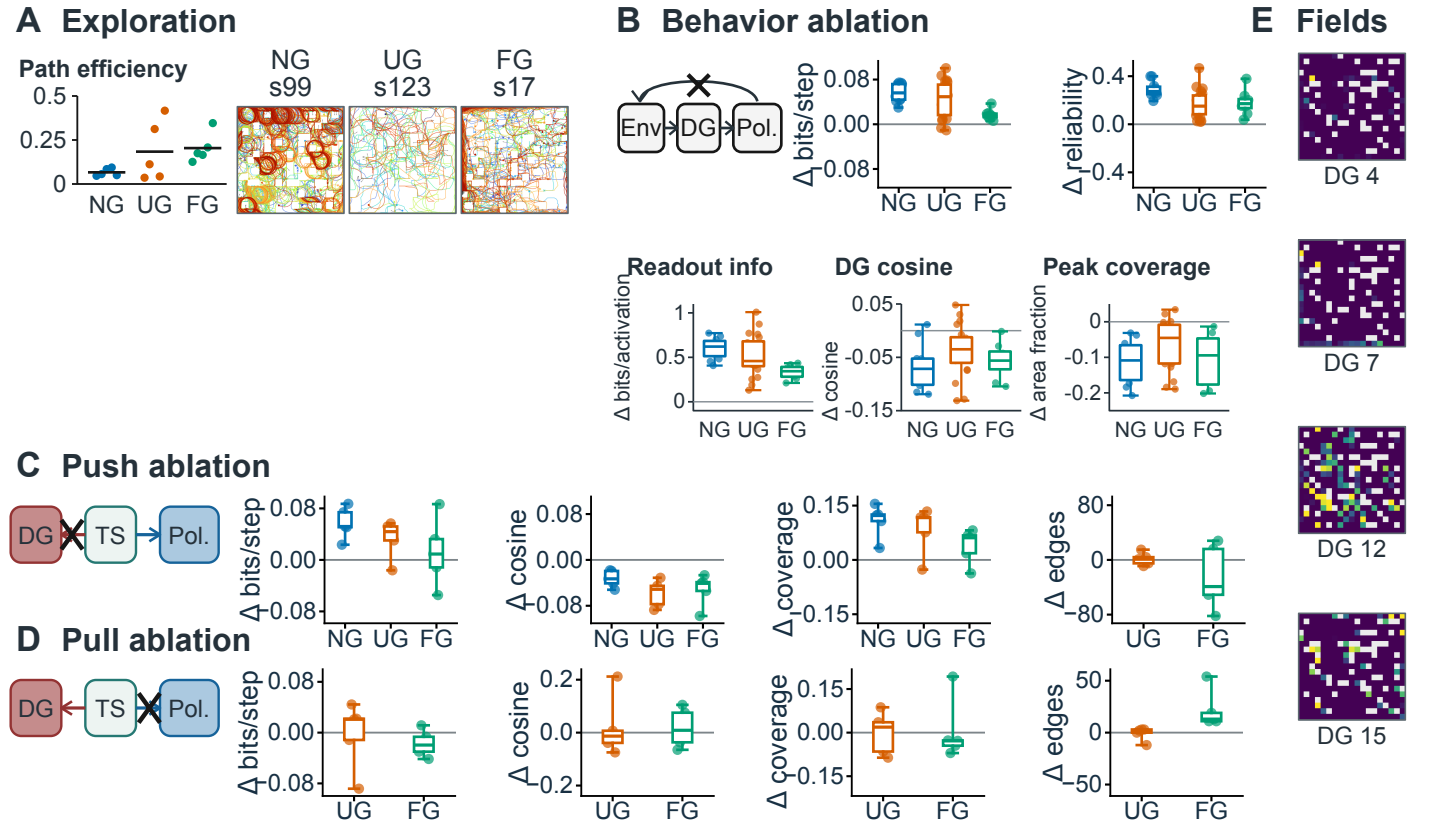

A Exploration
Path efficiency
0.5
0.25
0
NG UG FG
NG s99
UG s123
FG s17
B Behavior ablation
Env
DG
Pol.
Δ bits/step
0.08
0.00
0.08
NG UG FG
Δ reliability
0.4
0.0
0.4
NG UG FG
Readout info
Δ bits/activation
1
0.5
0
NG UG FG
DG cosine
Δ cosine
0.05
-0.05
-0.15
NG UG FG
Peak coverage
Δ area fraction
0
-0.1
-0.2
NG UG FG
E Fields
DG 4
DG 7
DG 12
DG 15
C Push ablation
DG
TS
Pol.
Δ bits/step
0.08
0.00
0.08
NG UG FG
Δ cosine
0.08
0.00
0.08
NG UG FG
Δ coverage
0.15
0.00
0.15
NG UG FG
Δ edges
80
0
80
UG FG
D Pull ablation
DG
TS
Pol.
Δ bits/step
0.08
0.00
0.08
UG FG
Δ cosine
0.2
0.0
0.2
UG FG
Δ coverage
0.15
0.00
0.15
UG FG
Δ edges
50
0
50
UG FG