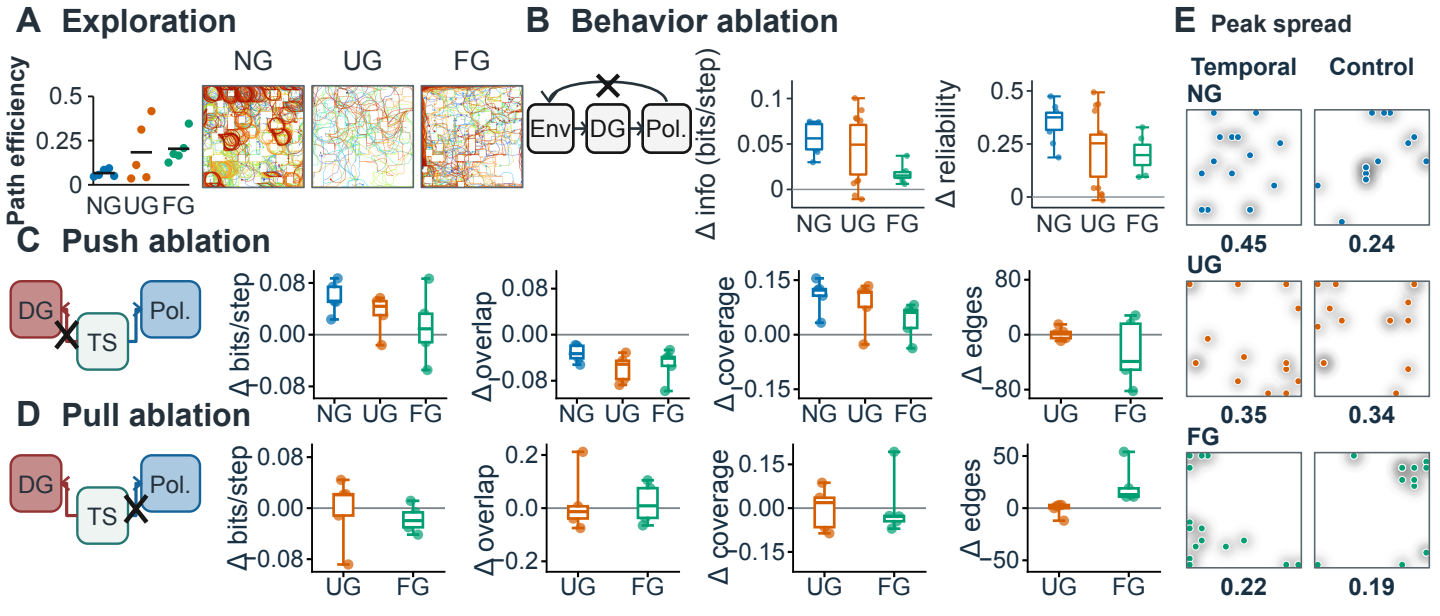

A Exploration
NG
UG
FG
Path efficiency
0.5
0.25
0
NG UG FG
B Behavior ablation
Env
DG
Pol.
Δ info (bits/step)
0.1
0.05
0
NG UG FG
Δ reliability
0.5
0.25
0
NG UG FG
E Peak spread
Temporal
Control
NG
0.45
0.24
UG
0.35
0.34
FG
0.22
0.19
C Push ablation
DG
TS
Pol.
Δ bits/step
0.08
0.00
−0.08
NG UG FG
Δ overlap
0.08
0.00
−0.08
NG UG FG
Δ coverage
0.15
0.00
−0.15
NG UG FG
Δ edges
80
0
−80
UG FG
D Pull ablation
DG
TS
Pol.
Δ bits/step
0.08
0.00
−0.08
UG FG
Δ overlap
0.2
0.0
−0.2
UG FG
Δ coverage
0.15
0.00
−0.15
UG FG
Δ edges
50
0
−50
UG FG