

# Control-Oriented Modeling for a Tractor-Trailer System

Xiaoyu HUANG

May 6, 2020

Date Drafted: June 17, 2019  
Partners: Xiaoyu Huang  
Xxx XXX

## Abstract

This report presents a control-oriented model for a tractor-trailer system.

## Nomenclature

### Variables

$\alpha_i$	Lumped tire slip angle of the $i$ th axle ( $i = 1, 2, \dots, 5$ )	$rad$
$\Delta$	Articulation angle between tractor and trailer	$rad$
$\delta$	Lumped steering angle	$rad$
$\dot{x}_1$	Longitudinal velocity of tractor in the tractor's frame	$m/s$
$\dot{x}_2$	Longitudinal velocity of trailer in the trailer's frame	$m/s$
$\dot{y}_1$	Lateral velocity of tractor in the tractor's frame	$m/s$
$\dot{y}_2$	Lateral velocity of trailer in the trailer's frame	$m/s$
$\psi_1$	Yaw angle of the tractor	$rad$
$\psi_2$	Yaw angle of the trailer	$rad$
$a_{x1}$	Longitudinal acceleration of the tractor	$m/s^2$
$a_{x2}$	Longitudinal acceleration of the trailer	$m/s^2$
$a_{y1}$	Lateral acceleration of the tractor	$m/s^2$
$a_{y2}$	Lateral acceleration of the trailer	$m/s^2$

$F_a$	Aerodynamic drag force	$N$
$F_f$	Rolling resistance force	$N$
$F_g$	Component of gravitational force on the slope	$N$
$F_r$	Lumped resistance force	$N$
$F_{xi}$	Longitudinal force of the $i$ th axle ( $i = 1, 2, \dots, 5$ )	$N$
$F_{yi}$	Lateral force of the $i$ th axle ( $i = 1, 2, \dots, 5$ )	$N$
$M_{z1}$	Yaw moment on the tractor	$Nm$
$M_{z2}$	Yaw moment on the trailer	$Nm$

#### Constants

$g$	Gravitational Acceleration	$9.81 \text{ m/s}^2$
$I_1$	Tractor yaw moment of inertia	$52,000 \text{ kg} \cdot \text{m}^2$
$I_2$	Trailer yaw moment of inertia	$39,290 \text{ kg} \cdot \text{m}^2$
$l_1$	Distance from tractor CG to the steering axle	$2.59 \text{ m}$
$l_2$	Distance from tractor CG to the front tandem axle	$2.70 \text{ m}$
$l_3$	Distance from tractor CG to the rear tandem axle	$4.02 \text{ m}$
$l_4$	Distance from trailer CG to the first trailer rear axle	$4.17 \text{ m}$
$l_5$	Distance from trailer CG to the second trailer rear axle	$5.41 \text{ m}$
$l_6$	Distance from the 5th wheel hitch to tractor CG	$3.36 \text{ m}$
$l_7$	Distance from the 5th wheel hitch to trailer CG	$6.32 \text{ m}$
$m_1$	Tractor mass	$9,000 \text{ kg}$
$m_2$	Trailer mass	$6,800 \text{ kg}$

Values are from [1].

## 1 Introduction

To derive the dynamic model for a tractor-trailer system (as defined in 1.2):

## 1.1 Objectives

## 1.2 Definitions

**Tractor-Trailer** The vehicle system as shown in Fig.1 is composed of two parts: tractor in the front to provide towing power, and trailer in the back to carry freight.

**Degree of Freedom (DOF)** 6-DOF to 4-DOF due to hitch constraints.

**Coordinate System** Global frame (inertial frame)

Vehicle local frame (non-inertial frame). Default is forward-left-up.

Tire frame (non-inertial frame).

**State-Space Representation** Used in control design, especially for linear systems.

**Lagrange's Equation**

**Newton-Euler Equations** Translational and rotational motions.

**Path-Following Control** In contrast, there is trajectory-tracking control.

## 1.3 Assumptions

**Small Angle Approximation** Angle smaller than 10 degrees can use small angle approximation [3].

$$\begin{aligned}\sin \theta &\approx \tan \theta \approx \theta \\ \cos \theta &\approx 1\end{aligned}$$

**Bicycle Model** Left and right wheels are lumped when deriving lateral tire forces.

# 2 Modeling

## 2.1 Vehicle Dynamics

Equations of the longitudinal motions are

$$m_1 a_{x1} = m_1 (\ddot{x}_1 - \dot{y}_1 \dot{\psi}_1) = F_{x1} + F_{x2} + F_{x3} + F_{xh} - F_{r1}, \quad (1)$$

$$m_2 a_{x2} = m_2 (\ddot{x}_2 - \dot{y}_2 \dot{\psi}_2) = F_{x4} + F_{x5} - F_{xh} - F_{r2}, \quad (2)$$

where,  $F_{r1}$  and  $F_{r2}$  are lumped resistance forces on the tractor and the trailer, respectively.

$$F_r = F_f + F_a + F_g \quad (3)$$

Equations of the tractor's lateral and yaw motions:

$$m_1 a_{y1} = m_1 (\ddot{y}_1 + \dot{x}_1 \dot{\psi}_1) = F_{y1} + F_{y2} + F_{y3} + F_{yh} \quad (4)$$

$$I_1 \ddot{\psi}_1 = l_1 F_{y1} - l_2 F_{y2} - l_3 F_{y3} - l_6 F_{yh} + M_{z1} \quad (5)$$

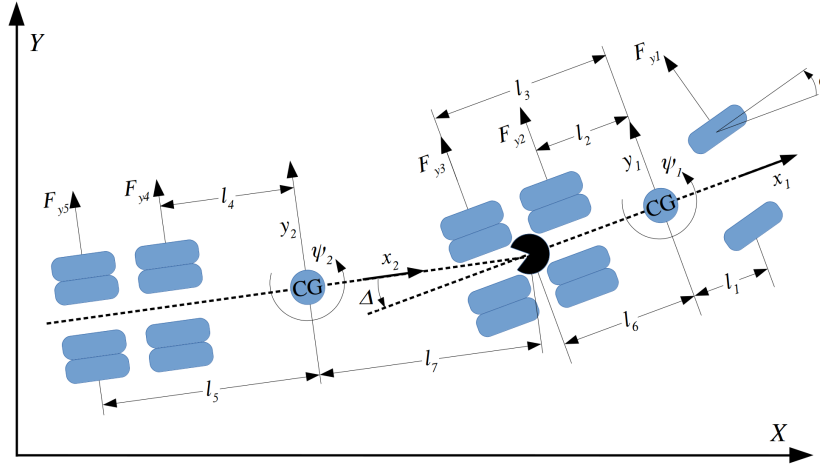


Figure 1: Tractor-Trailer Force System

Equations of the trailer's lateral and yaw motions:

$$m_2 a_{y2} = m_2 (\ddot{y}_2 + \dot{x}_2 \dot{\psi}_2) = F_{y4} + F_{y5} - F_{yh} \quad (6)$$

$$I_2 \ddot{\psi}_2 = -l_4 F_{y4} - l_5 F_{y5} - l_7 F_{yh} + M_{z2} \quad (7)$$

cv Note that the additional yaw moment terms  $M_{zi}$  are generated by differential braking, active Limited Slip Differential (LSD), or other devices.

**Remark:** What are the directions of the hitch forces  $F_{hx}$  and  $F_{hy}$ ? They are defined in this report to be aligned with the tractor's coordinate frame, as shown in Fig.2. Note that in this case hitch point can be viewed as a virtual steering axle for the trailer.

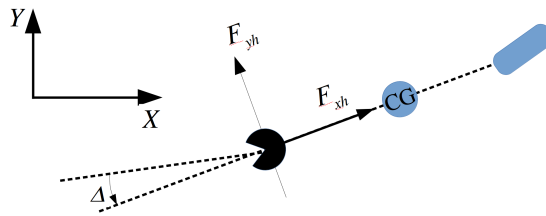


Figure 2: Hitch Force

## 2.2 Kinematics

For path following or trajectory tracking, we need to get the location of the tractor-trailer. The CG positions of both the tractor and the trailer in the global frame can

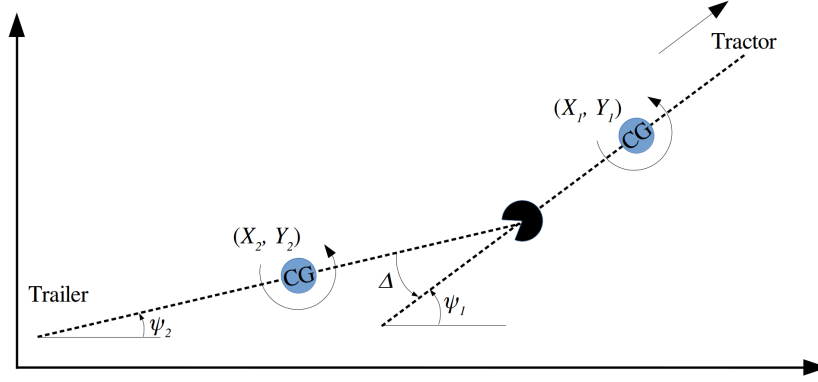


Figure 3: Tractor-Trailer Positions

be obtained from their velocities and yaw angles, as shown in Fig.3. ( $i$  stands for 1: tractor, or 2: trailer)

$$\dot{X}_i = \dot{x}_i \cos \psi_i - \dot{y}_i \sin \psi_i \quad (8)$$

$$\dot{Y}_i = \dot{x}_i \sin \psi_i + \dot{y}_i \cos \psi_i \quad (9)$$

There is not much difference between the tractor-trailer system and a regular car, other than that the CG locations are correlated by the hitch connection like a robot arm. The geometric constraints imposed by the hitch position are summarized in the following:

$$X_1 - l_6 \cos \psi_1 = X_2 + l_7 \cos \psi_2 \quad (10)$$

$$Y_1 - l_6 \sin \psi_1 = Y_2 + l_7 \sin \psi_2 \quad (11)$$

$$\Delta = \psi_1 - \psi_2 \quad (12)$$

Taking derivatives for both sides of (10) and (11), and substituting in the expressions in (8), (9), (12) results in:

$$\begin{aligned} \dot{x}_1 &= \dot{x}_2 \cos \Delta + (\dot{y}_2 + l_7 \dot{\psi}_2) \sin \Delta \\ \dot{y}_2 &= -l_7 \dot{\psi}_2 + (\dot{y}_1 - l_6 \dot{\psi}_1) \cos \Delta + \dot{x}_1 \sin \Delta \end{aligned}$$

Small angle approximation renders the following equations.

$$\dot{x}_1 = \dot{x}_2 + (\dot{y}_2 + l_7 \dot{\psi}_2) \Delta \quad (13)$$

$$\dot{y}_2 = -l_7 \dot{\psi}_2 + \dot{y}_1 - l_6 \dot{\psi}_1 + \dot{x}_1 \Delta \quad (14)$$

$$\ddot{y}_2 + \dot{x}_2 \dot{\psi}_2 = \ddot{y}_1 + \dot{x}_1 \dot{\psi}_1 - l_6 \ddot{\psi}_1 - l_7 \ddot{\psi}_2 \quad (15)$$

where, the velocities terms are all in the tractor's and the trailer's local frames. It can be seen that (13) restricts the longitudinal motion, and (14) restricts the lateral/yaw motions of the tractor-trailer system, respectively. Lateral acceleration constraint (15) is

derived following the similar philosophy as (14), yet with further simplification by neglecting the  $a_{x1}$  term, since  $a_{x1}$  is usually small for a heavy-duty tractor-trailer system [1][2].

To avoid obstacles, certain "critical" points, e.g., rear left and rear right corners of the trailer, may need to be defined and their trajectories tracked.

### 2.3 Tire Model



Figure 4: Placeholder for Side-Slip Angle

Lumping the left and right wheels and applying small angle approximation, tire slip angles for all five axles are calculated in the following.

Tractor front (steering) axle (as shown in Fig.4):

$$\alpha_1 = \delta - \frac{\dot{y}_1 + l_1 \dot{\psi}_1}{\dot{x}_1} \quad (16)$$

There is another enhanced model for the tractor front axle, as introduced in [1]. In this case, the tire slip angle and its derivative of the tractor front axle will be treated as another two states.

Tractor rear axles:

$$\alpha_2 = -\frac{\dot{y}_1 - l_2 \dot{\psi}_1}{\dot{x}_1} \quad (17)$$

$$\alpha_3 = -\frac{\dot{y}_1 - l_3 \dot{\psi}_1}{\dot{x}_1} \quad (18)$$

Trailer axles:

$$\alpha_4 = -\frac{\dot{y}_2 - l_4 \dot{\psi}_2}{\dot{x}_2} \quad (19)$$

$$\alpha_5 = -\frac{\dot{y}_2 - l_5 \dot{\psi}_2}{\dot{x}_2} \quad (20)$$

The lateral forces are calculated as:

$$F_{yi} = C_i \alpha_i, i = 1, 2, \dots, 5 \quad (21)$$

## 2.4 State-Space Formulations

We try to further simplify and rearrange all the above equations and come up with the following linear system represented by state-space equations:

$$M\dot{\mathbf{x}} = \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{u} \quad (22)$$

$$\mathbf{z} = \mathbf{C}\mathbf{x} \quad (23)$$

Therefore, we will have to neglect the longitudinal dynamics, and only consider lateral and yaw motions of the tractor-trailer system, which now has three degrees of freedom. For control development, the longitudinal velocities of the two parts are treated as the same as long as  $\Delta$  is small to further simplify the system equations. Hence, (13) becomes

$$\dot{x}_1 \approx \dot{x}_2 \quad (24)$$

The longitudinal velocity is a time-varying parameter, which makes the system linear time-varying (LTV).

### 2.4.1 Lateral Dynamics Model

The state vector defined in many previous work is  $\mathbf{x} = [\dot{y}_1 \ \dot{\psi}_1 \ \dot{\Delta} \ \Delta]^T$ . In this case, the main control objective is vehicle stabilization, while the path-following part is accomplished by the human driver. Input vector is  $\mathbf{u} = [\delta \ M_{z1} \ M_{z2}]^T$ .

$$\begin{aligned} \mathbf{M} &= \begin{bmatrix} m_1 + m_2 & -m_2(l_6 + l_7) & m_2l_7 & 0 \\ m_1l_6 & I_1 & 0 & 0 \\ m_2l_7 & -(I_2 + m_2l_6l_7 + m_2l_7^2) & I_2 + m_2l_7^2 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \\ \mathbf{A} &= \begin{bmatrix} -\frac{\sum C_i}{\dot{x}_1} & -(m_1 + m_2)\dot{x}_1 - \frac{a_{12}}{\dot{x}_1} & -\frac{a_{13}}{\dot{x}_1} & -(C_4 + C_5) \\ \frac{a_{21}}{\dot{x}_1} & -m_1l_6\dot{x}_1 - \frac{a_{22}}{\dot{x}_1} & 0 & 0 \\ -\frac{a_{13}}{\dot{x}_1} & -m_2l_7\dot{x}_1 + (l_6 + l_7)\frac{a_{13}}{\dot{x}_1} + \frac{a_{32}}{\dot{x}_1} & -l_7\frac{a_{13}}{\dot{x}_1} - \frac{a_{32}}{\dot{x}_1} & -a_{13} \\ 0 & 0 & 1 & 0 \end{bmatrix} \\ \mathbf{B} &= \begin{bmatrix} C_1 & 0 & 0 \\ C_1(l_1 + l_6) & 1 & 0 \\ 0 & 0 & -1 \\ 0 & 0 & 0 \end{bmatrix} \end{aligned}$$

$$a_{12} = C_1l_1 - C_2l_2 - C_3l_3 - C_4l_4 - C_5l_5 - (C_4 + C_5)(l_6 + l_7)$$

$$a_{13} = C_4l_4 + C_5l_5 + C_4l_7 + C_5l_7$$

$$a_{21} = -C_1(l_1 + l_6) + C_2(l_2 - l_6) + C_3(l_3 - l_6)$$

$$a_{22} = C_1l_1(l_1 + l_6) + C_2l_2(l_2 - l_6) + C_3l_3(l_3 - l_6)$$

$$a_{32} = C_4l_4(l_4 + l_7) + C_5l_5(l_5 + l_7)$$



Figure 5: Placeholder for Path-Following Errors

### 2.4.2 Augmented System

For autonomous trucks, the path-following (or trajectory tracking) problem is to be solved on-line by the computer programs. We need to augment the system with the path-following errors, i.e.,  $\mathbf{x} = [\dot{y}_1 \quad \dot{\psi}_1 \quad \dot{\Delta} \quad \Delta \quad e_{y1} \quad e_{\psi1}]$ .

### 2.4.3 Longitudinal Dynamics Model

Combining (1), (2), and the simplification in (24), the longitudinal state space model is as follows.

$$(m_1 + m_2)\ddot{x} - m_1\dot{y}_1\dot{\psi}_1 - m_2\dot{y}_2\dot{\psi}_2 = \sum F_{xi} - F_{r1} - F_{r2} \quad (25)$$

## 2.5 Actuator Model

Actuator models map the input commands/signals to the road wheel steering angle and torques. Since the powertrain and driveline of the tractor are very complicated, it is promising to use data-driven modeling techniques to get this mapping. The remaining questions are: 1) what inputs are involved; 2) how to get the output values, i.e., angles, torques, forces of the road wheels.

The first question is more straightforward: we can simply throw in whatever might affect the outputs. For example, hand-wheel steering angle, throttle/brake pedal positions, engine speed, gear ratio, vehicle speed, etc. The second problem will have to be solved by applying optimization utilizing the vehicle dynamics model. In other words, we will estimate the force terms from all the available vehicle dynamics signals and the model developed in the previous sections. However, how can we make sure that the vehicle dynamics model is accurate enough?

One remedy is to carefully design experiments, or calibration process, to decouple a big model to several smaller ones, and to minimize disturbance. For example, going straight-line on a flat ground a few times at various acceleration/deceleration levels may give us good enough data to train the driving/braking models, since the force terms can simply be estimated using  $F = ma$ .



## **3 Control System**

### **3.1 Control Objectives**

- (1) Minimize the lateral offsets for both tractor and trailer
- (2) Maintain vehicle stability
- (3) Keep articulation angle and its rate of change small
- (4) Track desired speed profile for fuel efficiency (optional)

### **3.2 Controllability and Observability**

### **3.3 Problem Statement**

- (1) Given the target path information, control the steering angle to satisfy the objectives?

## **4 Simulations**

## **5 Experiments**

### **5.1 Design of Experiments**

For model training purposes, the following maneuvers are necessary.

- 1) Straight-line coast down from high speed.
- 2) Straight-line acceleration from different initial speed to different final speed at different throttle opening.
- 3) Straight-line deceleration from different initial speed to different final speed at different brake effort.

## **6 Conclusions**

## **References**

- [1] L. Alexander, M. Donath, M. Hennessey, V. Morellas, and C. Shankwitz. A lateral dynamic model of a tractor-trailer: experimental validation. Technical report, University of Minnesota, 1996.
- [2] A. Hac, D. Fulk, and H. Chen. Stability and control considerations of vehicle-trailer combination. *SAE International Journal of Passenger Cars-Mechanical Systems*, 1:925–937, 2008.
- [3] R. Rajamani. *Vehicle dynamics and control*, volume 1. Springer Science & Business Media, 2011.