



深圳联信泓科技有限公司

Shen Zhen Lianxin Hong Technology, Ltd.

样品承认书

Writing-type Touch panel Specification

产品名称/Product Name: 12.1寸电容触摸屏

机种名称/Product Number:

客户名称/Customer name:

日期/APPROVE Date: 2026-05-18

APPROVE	CHECK	EDIT
YJP	GLH	HSG

客户确认: (签名/盖章)

深圳市联信泓科技有限公司

Shenzhen Lianxin Hong Technology, Ltd

地址: 深圳市宝安区沙井镇南岭路2号新二鼎丰科技园C栋2楼

ADD: Shenzhen Baoan District City manhole town Nanling Road No. 2 new two Dingfeng Technology Park C Building 2 floor

Tel: 0755-27905331

Fax: 0755-27957331

<http://www.lianxin hong. com>



深圳联信泓科技有限公司

Shen Zhen lainxinhong Technology, Ltd.

CONTENT: 目录

1. GENERAL SPECIFICATION 产品规格

- 1-1. Product name 产品名称
- 1-2. Product No. 产品编号
- 1-3. Drawing No. 图纸版本
- 1-4. Code No. 样品编号

2. BASIC FEATURES 基本特征

- 2-1 Dimension 尺寸
- 2-2 Construction 结构
- 2-3 Surface Hardness 表面硬度
- 2-4 Scope 应用方式
- 2-5 Application 应用范围

3. MECHANICAL CHARACTERISTICS 机械性能

- 3-1 Operation distance 操作距离
- 3-2 Package drop 包装后跌落测试
- 3-3 FPC bending test FPC弯折测试
- 3-4 point defect 点缺陷
- 3-5 Line Defect 线缺陷

4. ELECTRICAL CHARACTERISTICS 电气特性

- 4-1 Insulation 绝缘性
- 4-2 Supply voltage for logic 电压
- 4-3 Supply current for logic 电流

5. OPTICS CHARACTERISTICS 光学特性

- 5-1 Light transmissivity 光透过率

6. RELIABILITY 可靠性

- 6-1 Operating temperature and humidity 操作温度和湿度
- 6-2 Storage Temperature and humidity 存储温度和湿度
- 6-3 Humidity resistance 湿度抗性
- 6-4 Heat resistance 抗热性
- 6-5 Cold resistance 抗低温性
- 6-6 Thermal shock 热冲击
- 6-7 Ball-falling Test(落球试验)

7. Cautions (注意事项)

- 7.1 Cautions for Storage (储存注意事项)
- 7.2 Cautions for Operation (操作过程注意事项)
- 7.3 Other (其它)

8. BLOCK DIAGRAM 原理框图

- 8-1 IC Pin Configuration IC 脚定义
- 8-2 BLOCK DIAGRAM 原理框图

9. DRAWING 图纸



深圳联信泓科技有限公司

Shen Zhen Lianxin Hong Technology, Ltd.

1. General Specification 产品规格

Item 项目	Specification 规格	Remarks 备注
1-1 Product name 产品名称	12.1"电容触摸屏	
1-2 Product No. 产品编号		
1-3 Drawing No. 图纸编号		
1-4 Code No. 样品编号		

2. Basic features 基本特性

Item 项目	Specification 规格	Remarks 备注
2-1. Dimension 尺寸	12.1 寸	
2-1-1 Outline Dimension 外形尺寸	280.98*186.06	Unit 单位: mm
2-1-2 Viewing Area 可视区	261.22*163.3	Unit 单位: mm
2-1-3 Active Area 动作区	260.22*162.3	Unit 单位: mm
2-2. Construction 结构	G+G 所用材料	
2-2-1 First Layer 第一层	GLASS COVER	Thickness: 1.1mm 厚度: 1.1mm
2-2-2 Second Layer 第二层	GLASS SENSOR	Thickness: 0.7mm 厚度: 0.7mm
2-3 Surface Hardness 表面硬度	6H	



深圳联信泓科技有限公司

Shen Zhen Lianxin Hong Technology, Ltd.

2-4 Scope 应用方式	This specification applies for finger input transparent touch panels.(Those mentioned in the individual specifications shall be given priority.)此规格适用在手指输入型透明触摸屏(此处以提到的有特殊要求应优先考虑)	
2-5 Application 应用范围	The product is touch panels used as the input devices for general electric appliances and OA equipment.此产品是透明触摸屏, 常作为常用的电子器件和OA 设备的输入装置	

3. Mechanical characteristics 机械特性

Item 项目	Specification 规格		Remarks 备注			
3-1 Diagonal of contact area 手指接触面对角线	More than 5mm 大于5mm					
3-2 Package drop 包装跌落测试	No damage to the product.(drop from 50 cm height) 包装从50 cm 高处跌落无损伤					
3-3 FPC bending test FPC 弯折测试	≥3 times bending (by R1 mm), Electrical performance should be OK。 FPC弯折3次以上，电气性能OK。					
检 验 项 目	尺寸/检验标准		判断标准		检验工具/ 方法	
			A 区	B 区		
3-4 点缺陷 (白点 . 黑点 . 亮点 . 彩点)	5 寸 以 下	D≤0.1mm	忽略不计（不可密集）		菲林尺 / 目视	
		0.1mm<D≤0.15mm, DS>5mm	N≤2, 允收	N≤3, 允收		
			0.15mm<D≤0.2mm, DS>5mm	N≤1, 允收		N≤3, 允收
				D>0.2mm		不允许
		D≤0.15mm	忽略不计（不可密集）			



深圳联信泓科技有限公司

Shen Zhen Lianxin Hong Technology, Ltd.

点等)	5 寸至 8 寸	0.15mm < D ≤ 0.35mm, DS>10mm	N≤3, 允收	N≤4, 允收	
		D>0.35mm	不允许		
	9 寸至 11 寸	D≤0.3mm	N≤4, 且 DS>10mm		
		0.2mm<D≤0.4mm	N ≤ 3, 允收	N≤3, 且 DS>10mm	
		D>0.4mm	不允许		
3-5 线 缺陷	W≤0.03mm		忽略不计（不可密集		菲林尺 / 目 视
	0.03mm<W0.05, L≤0.08.0mm, DS>20mm		N ≤ 2, 允收	N ≤ 3, 允收	
	W>0.1mm 或 L>5.0mm		不允许		
崩 边 / 崩角	正面看不见, 且只有一处		允收		目视

4. Electric characteristics 电气参数

Item 项目	Specification 规格					Remarks 备注
4-1 Insulation 绝缘性	20M _ or over(Dc 25V)					
4-2 Supply voltage for logic 电压	Symbol	min	type	max	unit	
	vdd	1.8v	2.8V	3.3V	V	
4-3 Supply current for logic 电流	Symbol	min	type	max	unit	
	idd				mA	

5. Optics characteristics 光学特性

Item 项目	Specification 规格	Remarks 备注
5-1 Light transmissivity 光透过率	>85%	白光测试

6. Reliability 可靠性

Item 项目	Specification 规格	Remarks 备注
6-1 Operating	-10~60℃, 20~70% RH	Except for



深圳联信泓科技有限公司

Shen Zhen Lianxin Hong Technology, Ltd.

temperature and humidity 操作温度和湿度		dew gathering 无结露
6-2 storage temperature and humidity 存储温度和湿度	-20~70℃, 20~90% RH	Except for dew gathering 无结露
6-3 Humidity resistance 高温高湿	The requirement in 6 shall be satisfied after exposing at 60℃, 90% RH for 120 hours and at normal temperature and humidity for 24 hours. 在60℃, 90% RH 条件下存放120 小时, 取出在常温常湿下再存放24 小时后, 满足第4 点所要求的各项电气参数。	Except for dew gathering 无结露
6-4 Heat resistance 高温存储	The requirements in 6 shall be satisfied after exposing at 60℃, for 240 hours and at normal temperature and humidity for 24 hours. 在60℃条件下存放240小时, 取出在常温常湿下再存放24小时后, 满足第4 点所要求的各项电气参数。	Except for dew gathering 无结露
6-5 Cold resistance 低温存储	The requirements in 6 shall be satisfied after exposing at -20℃, for 240 hours and at normal temperature and humidity for 24 hours 在-20℃条件下存放240 小时, 取出在常温常湿下再存放24小时后, 满足第4 点所要求的各项电气参数。	Except for dew gathering 无结露
6-6 Thermal shock 冷热冲击	The requirements in 6 shall be satisfied after exposing under the conditions of -30℃(0.5hour)→80℃(0.5hour) by 10 cycles ,and at normal temperature and humidity for 24 hours. 按照-20℃ (0.5 小时) →70℃ (0.5 小时) 的条件循环50 次, 取出在常温常湿下再存放24 小时后, 满足第4 点所要求的各项电气参数。	Except for dew gathering 无结露



深圳联信泓科技有限公司

Shen Zhen Lianxin Hong Technology, Ltd.

6-7Ball-falling Test(落球试验)	Steel ball weight:64g 钢球重量:64g Ball-falling height:80cm 落球高度:80cm	Three is not broken 三次不破
-----------------------------------	--	--------------------------------

7. Cautions (注意事项)

7-1 Cautions for Storage (储存注意事项)

Store the products at the temperature and humidity mentioned in the specification in a state storage of package with care not to expose the products to the direct sunlight or stresses.

请依规格书所规范之温湿度下保存，避免阳光直射或施加外力于产品上。

7-2 Cautions for Operation (操作过程注意事项)

(a) Do not put a heavy, hard or sharp object on the product.

请勿放置重物，硬物或锐利物品于产品上。

(b) Do not handle the product by holding the FPC in order to assure the reliability.

请勿直接从FPC 做拿取之动作，以确保产品信赖性。

(c) Please wear clean finger sacks, gloves and mask to avoid fingerprint or stain attach, and also hold the portion outside the view area when handling the panel.

请在接触产品之前戴上清洁的指套、手套和口罩，以避免留下指纹或脏污，并在可视区以外区域做拿取。

(d) Do not put one product on the other. Otherwise, it may cause the product to be

scratched or changes on cosmetic occur.

请勿将产品堆栈放置，否则可能造成产品表面刮伤造或外观形变。



深圳联信泓科技有限公司

Shen Zhen Lianxin Hong Technology, Ltd.

(e) Avoid use and storage the product near or exposed to organic solvents, acid gases.

请避免将产品靠近或暴露于有机溶剂，酸性气体的环境下使用及存放。

(f) Please use dry or soft clothes with neutral detergent or ethanol to clean the product.

请使用干性或柔质绵布沾中性清洁剂或酒精轻拭产品。



深圳联信泓科技有限公司

Shen Zhen Lianxin Hong Technology, Ltd.

7-3 Other (其它)

(a) When this product was built into the set, if there is vulcanization material such as vulcanized rubber which has a possibility of generating the salutation gas near the set, this phenomenon will be caused of functional degradation or abnormalities.

当产品组合上机时，若有如硫化橡胶的硫性材料在机壳附近可能会引起硫化反应，此现象发生会导致产品的功能下降或异常。


(b) Although full care is taken to ensure product quality, failure modes such as degradation, short circuits, or open circuits might be caused. Therefore, to design a product set, please study the effects of any single failure of the panel in advance and consider the safety of product configuration.

虽然我司很谨慎的保证产品的品质，但是组装有影响断路、短路现象出现的可能，因此，贵方在设计产品装置的同时，请预先研究引起产品功能不良的因素，并且要考虑产品的配置安全性。

(c) The product provide one year guarantee under operation condition described in this Specification.

本产品符合规格书所规范之正常操作条件下，提供一年保证期限。

8. Block diagram 原理框图

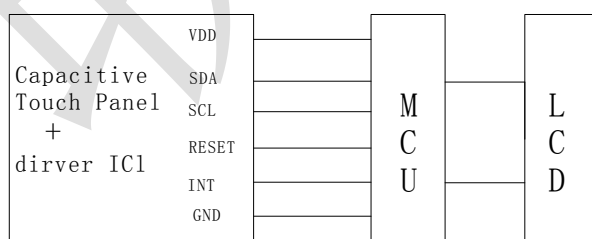



深圳联信泓科技有限公司

Shen Zhen Lianxin Hong Technology, Ltd.

8-1 IC Pin Configuration IC 脚定义

PIN	定义	备注
PIN-1	SCL	
PIN-2	SDA	
PIN-3	INT	
PIN-4	GND	
PIN-5	VDD	
PIN-6	RST	

9. DRAWIN

