

ANHUI BOYAN NEW MATERIAL CO., LTD.



BOYAN

ALUMINIUM PASTE

ANHUI BOYAN NEW MATERIAL CO., LTD.

Add: WEILIU ROAD, HUOSHAN ECONOMIC DEVELOPMENT ZONE,
LUAN CITY, ANHUI PROVINCE, CHINA

Tel: +86 18222367186 E-mail: lynn@bocaichem.com

COMPANY PROFILE

● ANHUI BOYAN NEW MATERIAL CO., LTD.



Anhui Boyan New Material Co., Ltd. was established in 2018, which is located in the Economic Development Zone of Huoshan County, Lu'an City, Anhui Province. It is an enterprise specializing in the research, development and production of aluminium paste. Our head company Jinan Bocai Chemical Technology Co., Ltd has more than 20 years history. The factory occupies an area of 30,000 square meters, has a standard workshop of 20,000 square meters, a high-standard laboratory, and full-time scientific researchers engaged in the research and development of aluminium paste. High-quality talents and cutting-edge technology are a strong guarantee for our company to produce high-quality products!

Our factory mainly produce leafing aluminium paste, non-leafing aluminium paste, imitation plating series, fine white series aluminium paste, bright aluminium paste, high-bright silver sparking

series, resin-coated series, and water-based series aluminium paste. They are widely used in coatings, plastics, inks and other industries, up to the standard requirement of high-end automotive coating, mobile phones coating, plastic coating for household appliances, and aluminium-plastic panels coating. Strong application research capabilities ensure the adaptability and stability of the product to coatings.

In the past two decades of development, high-tech R&D and modern management have enabled our company to continuously develop and improve, forming a complete quality assurance system. Excellent products and good service have won wide praise from customers at home and abroad.

"The world is rich, the world is colorful!" Anhui Boyan and Jinan Bocai will go forward hand in hand, abide by the service principle of "all for customers" and make outstanding contributions to the development of the coating industry!

● ORDINARY NON-LEAFING ALUMINIUM PASTE

CHARACTERISTICS

The non-leafing aluminium paste is bright with fine fraction size and high hiding power , which has a good decorative effect. It is widely used for marine paint, hammer paint, primer of electromechanical products and regular industrial paint. As well as umbrella leather coating usage.



PERFORMANCE PARAMETER

GRADE	NON-VOLATILE CONTENT(±2%)	AVERAGE PARTICLE SIZE(μm)(D50)	SCREEN ANALYSIS (325MESH<%)	SOLVENT	MOISTURE CONTENT(≤%)
110N	65	12	1.0	HA/MS	0.1
110	65	14	1.0	HA/MS	0.1
108A	65	17	1.0	HA/MS	0.1

● LEAFING ALUMINIUM PASTE



CHARACTERISTICS

The leafing aluminium paste has a tight surface, good oxidation resistance, surface covering property and high floating abilities. At the same time, it provides a good shield and protection for the paint film and its matrix materials. It's widely used for coatings of roof anti-corrosive, tank and pipe, refractory product, and ship. It's also can be used for aerosols and leather finishing agent,etc.

PERFORMANCE PARAMETER

GRADE	NON-VOLATILE CONTENT(±2%)	AVERAGE PARTICLE SIZE(μm)(D50)	LEAFING VALUE(MIN.%)	WATER COVERAGE (MIN.CM2/G)	SCREEN ANALYSIS (325MESH<%)	SOLVENT	MOISTURE CONTENT(≤%)
2501	65	15	80	17000	1.0	HA/MS	0.1
2501A	65	20	85	17000	1.0	HA/MS	0.1
2601	65	15	85	20000	1.0	HA/MS	0.1
2602	65	13	85	20000	1.0	HA/MS	0.1
2606	65	6	75	20000	1.0	HA/MS	0.1
2802	65	17	95	20000	1.0	HA/MS	0.1

● IMITATION PLATING
ALUMINIUM PASTE
(Non -leafing)



Fine particle size, distribution orderly, slippery surface, strong metallic, effect , bright color, good leveling and hiding powder, and special unique brightness and whiteness effect. It's applied to high-class appliance, hardware, car repair paint, plastic paint, ink and exquisite decoration, etc.

PERFORMANCE PARAMETER

GRADE	NON-VOLATILE CONTENT(±2%)	AVERAGE PARTICLE SIZE(μm)(D50)	SCREEN ANALYSIS (325MESH≥%)	SOLVENT
9001	70	5	99.9	HA/MS
9101	70	5	99.9	HA/MS
9006	70	8	99.9	HA/MS
9106	70	8	99.9	HA/MS
9009	70	11	99.9	HA/MS
9109	70	11	99.9	HA/MS
9010	70	13	99.9	HA/MS
9011	70	14	99.9	HA/MS
9015	70	15	99.9	HA/MS
9016	70	16	99.9	HA/MS

● FINE WHITE SERIES
ALUMINIUM PASTE

(Non -leafing)

CHARACTERISTICS

Fine white series aluminium paste has powerful hiding, rectangular distribution, bright white metallic effect, and flatness on the surface. Applies to the coatings for plastic, electronic product, coil material, hardware and appliance, and it's also used as roll painting for piece good, printing ink, etc.



PERFORMANCE PARAMETER

GRADE	NON-VOLATILE CONTENT(±2%)	AVERAGE PARTICLE SIZE(μm)(D50)	SCREEN ANALYSIS (325MESH≥%)	SOLVENT
5006	65	8	99.9	HA/MS
5008	65	10	99.9	HA/MS
5012	65	14	99.9	HA/MS
5018	65	18	99.9	HA/MS

● BRIGHT ALUMINIUM PASTE



CHARACTERISTICS

Bright silver series aluminium paste has high particle size distribution, good hiding power, smooth surface, strong metallic effect, and has the advantages of fine silver and imitation plating aluminium paste. It is especially suitable for all kinds of high-end electrical appliances, hardware, car repair paint and fine decoration, etc.

PERFORMANCE PARAMETER

GRADE	NON-VOLATILE CONTENT(±2%)	AVERAGE PARTICLE SIZE(μm)(D50)	SCREEN ANALYSIS (325MESH≥%)	SOLVENT
576	65	5	99.9	HA/MS
578	65	8	99.9	HA/MS
580	65	12	99.9	HA/MS
581	65	14	99.9	HA/MS
591	65	15	99.9	HA/MS
591A	65	16	99.9	HA/MS

● HIGH BRIGHT SPARKLE

ALUMINIUM PASTE

(Non -leafing)

CHARACTERISTICS

The aluminium paste is “silver dollars” shape, with good leveling, narrow particle size distribution, high flash, strong reflective, smooth feel, acid resistance high temperature resistance, etc. It’s widely used in hardware, appliances, handicrafts, plastic surface, automotive refinish paint, etc.



PERFORMANCE PARAMETER

GRADE	NON-VOLATILE CONTENT(±2%)	AVERAGE PARTICLE SIZE(μm)(D50)	SCREEN ANALYSIS (325MESH≥%)	SOLVENT
1118	70	18	99.9	HA/MS
1022	70	22	99.9	HA/MS
1027	70	25	99.9	HA/MS
1032	70	28	99.9	HA/MS
1038	70	35	99.9 (200MESH)	HA/MS
1058	70	42	99.9 (120MESH)	HA/MS
1072	70	60	99.9 (80MESH)	HA/MS
1082	70	70	99.9 (80MESH)	HA/MS

● HIGH LEAFING

ALUMINIUM PASTE

CHARACTERISTICS

The aluminium paste is made by a special milling process, with smooth surface, neat parallel orientation whiteness and hiding power excellent metallic finish and chrome effect. It’s applied to high quality ink, car wheels and automotive accessories, all kinds of plastic and hardware coatings.



PERFORMANCE PARAMETER

GRADE	NON-VOLATILE CONTENT(±2%)	AVERAGE PARTICLE SIZE(μm)(D50)	Screen analysis<45μm (≥%)	SOLVENT
2903	70	5	99	HA/MS
2913	70	13	99	HA/MS
2917	70	17	99	HA/MS

● VMP

(Vacuum Metallized Pigments)

Mirror chrome effect



CHARACTERISTICS

The vacuum metallized pigments is manufactured with high purity aluminium. When formulated with the appropriate resin systems, having a good mirror chrome and high reflective effect, as well as high coverage powder. It can be widely used for car paint, wheel paint, spray paint, ink and nail polish usage.

PERFORMANCE PARAMETER

GRADE	AVERAGE PARTICLE SIZE(μm)(D50)	SOLVENT
9905	5	EAC
9906	6	EAC
9907	7	PMA

● WATER-BASED

ALUMINIUM PASTE

CHARACTERISTICS

Silica surface-treated aluminium paste has excellent acid and alkali resistance and water resistance, easy to disperse, low gas release, stable storage characteristics, which can meet the environmental protection requirements. This grade aluminium paste apply to water-based coating paint and ink.

Water-based aluminium paste treated with modified polyester have good water dispersibility, water resistance and excellent metallic effect.

PERFORMANCE PARAMETER

GRADE	NON-VOLATILE CONTENT(±2%)	AVERAGE PARTICLE SIZE(μm)(D50)	SCREEN ANALYSIS (325MESH≥%)	SOLVENT	SURFACE TREATMENT	TYPE
8806	62	6	99	DPM/WATER	SiO2 thick silica-coated	NON-LEAFING
8808	62	8	99	DPM/WATER	SiO2 thick silica-coated	NON-LEAFING
8813	62	13	99	DPM/WATER	SiO2 thick silica-coated	NON-LEAFING
8822	62	22	99	DPM/WATER	SiO2 thick silica-coated	NON-LEAFING
8830	62	30	99	DPM/WATER	SiO2 thick silica-coated	NON-LEAFING
8408	58	8	99	WATER	SiO2 thin silica-coated	NON-LEAFING
8410	58	10	99	WATER	SiO2 thin silica-coated	NON-LEAFING
8413	58	13	99	WATER	SiO2 thin silica-coated	NON-LEAFING
GP8813	62	13	99	DPM/WATER	SiO2 organic resin	LEAFING
GP8830	62	30	99	DPM/WATER	SiO2 organic resin	LEAFING
W-110	75	14	99	PM	modified polyester	NON-LEAFING
W-591	75	16	99	PM	modified polyester	NON-LEAFING
W-2501	75	20	99	PM	modified polyester	LEAFING
W-2810	75	18	99	PM	modified polyester	LEAFING

● RESIN-COATED ALUMINIUM PASTE

CHARACTERISTICS



With special processing, each aluminium flake gets polymer coated so that this series aluminium paste perform excellent weatherability , corrosion resistance, voltage resistance and strong adhesion. Mainly used in high-end industrial decoration, such as household appliances shell paint, cell phone paint, coil paint, exterior paint and some special ink.

PERFORMANCE PARAMETER

GRADE	NON-VOLATILE CONTENT(±2%)	AVERAGE PARTICLE SIZE(μ m)(D50)	Screen analysis<45 μ m (≥ %)	SOLVENT
7706	62	6	99	HA/MS
7708	62	8	99	HA/MS
7710	62	10	99	HA/MS
7715	62	15	99	HA/MS
7718	62	18	99	HA/MS
7722	62	22	99	HA/MS
7730	62	30	99	HA/MS
7750	62	50	99 (120MESH)	HA/MS

● ALUMINUIM PASTE FOR AAC

CHARACTERISTICS

Aluminium paste become silvery-grey, flake powder, delicate processing produced by mineral solvent, special water solvent, surfactant. Having the feature of stable performance, high activity, convenient to use, easy to disperse characteristics in water, be helpful for processing concrete casting production, in condition of low temperature, and freezing, after melting aluminium index unchanged, the activity is the ideal additive and foaming agent of silicate product, general index reach for exceed country JC/T407-2008 executive standard.

PERFORMANCE PARAMETER

ITEM		PARAMETER	PARAMETER
GRADE		GLS-65	GLS-70
SOLID CONTENT		≥65%	≥70%
ACTIVATED ALUMINIUM AOLID		≥92%	≥90%
WATER DISPERSION		GOOD	
FINENESS		0.075mm	
RESIDUE ON SIEVE RATION		3.0%	
GAS PRODUCE RATION		4minites 40-60% 16minites ≥90% 30minites ≥99%	
STORAGE TEMPERATURE	15℃-20℃	GUARANTEE PERIOD	6months

PACKAGE STORAGE AND + TRANSPORTATION GUIDE

PACKING

Packing:
25kgs metal drum with plastic bag inside.

TRANSPORTATION

Handle gently, and no acute collision.


STORAGE

1. Keep receptacles tightly sealed.
2. Store in cool, dry place in tightly closed receptacles.
3. Keep away from heat and direct sunlight.
4. Prevent formation of dust.
5. Ensure good interior ventilation, especially at floor level.
6. After period of time, the aluminium paste maybe drier. Please do re-test before using in case unnecessary loss.

KEEPING NOTICE + PROCEEDINGS

- Keep it under sealed condition after using to prevent the dissolvent from volatilizing.
- Keep it away from water, acid and alkaline to prevent the corrosion reaction, which cause the formation of hydrogen.
- Keep it in a dry place away from direct sunlight, rain or too high temperatures. The temperatures should be kept between 15°C and 40 °C.
- Severe bumping and vibrating during transportation may cause the aluminium pigment to separate from solvent, please mix it well by stirring it before using it.
- Usealed aluminium paste may become dry and oxidized over time, so please check properly before using it again.

ANHUI BOYAN NEW MATERIAL CO., LTD.

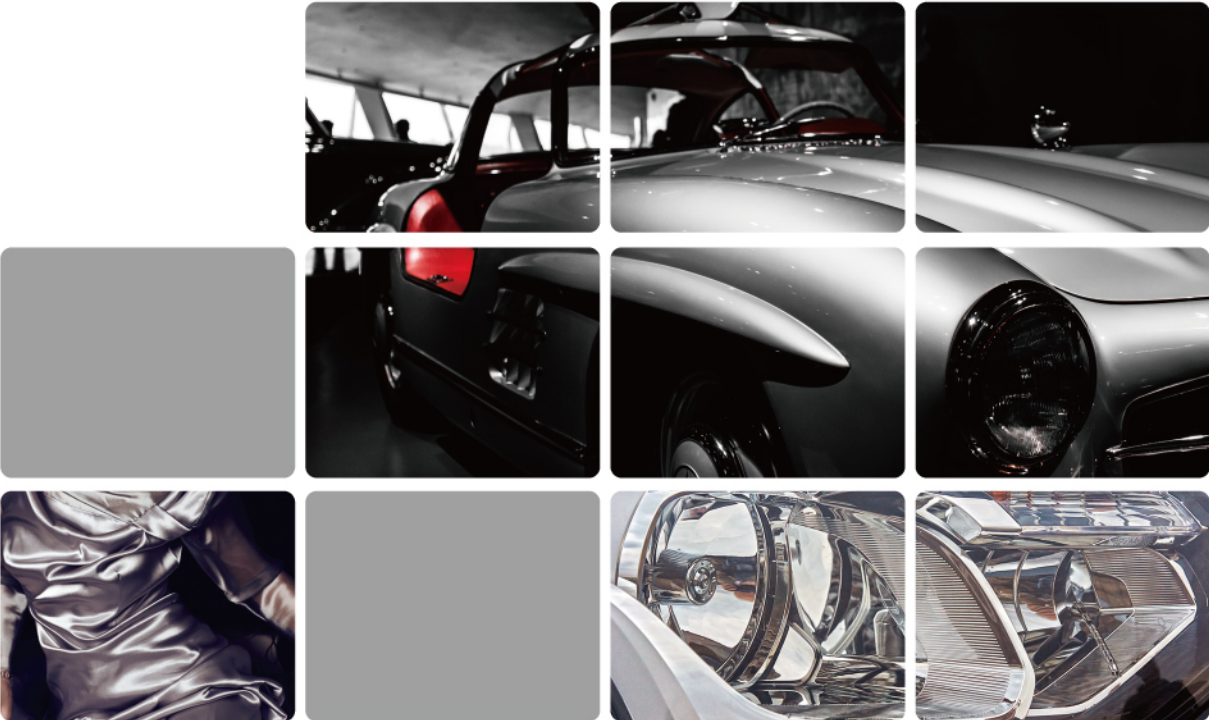

BOYAN NEW MATERIAL