

MPZ1608S121ATDH5










用途	车载等级
特点	Power 电源用 AEC-Q200 AEC-Q200
系列	MPZ
状态	量产体制



尺寸		
长度(L)	$1.60 \text{mm} \pm 0.15 \text{mm}$	
宽度(W)	0.80mm ±0.15mm	
厚度(T)	0.60mm ±0.15mm	
推荐焊盘布局(A)	0.60mm Nom.	
推荐焊盘布局(B)	0.80mm Nom.	
推荐焊盘布局(C)	0.80mm Nom.	

电气特性		
阻抗 at 100MHz	$120 \Omega \pm 25\%$	
额定电流	2A	
直流电阻(Max.)	45mΩ	

	其他
使用温度范围(包括自我温度上升)	-55∼125° C
相校七注	回流
焊接方法	烙铁焊接
AEC-Q200	Yes
包装形式	纸编带 (180mm卷筒、带宽 8mm)
包装个数	4000pcs
重量	0.003g

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website. ! All specifications are subject to change without notice.



MPZ1608S121ATDH5











特性图表(这是参考数据,并不保证产品的特性。)

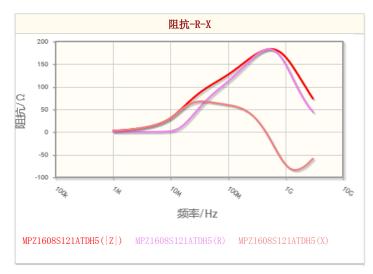

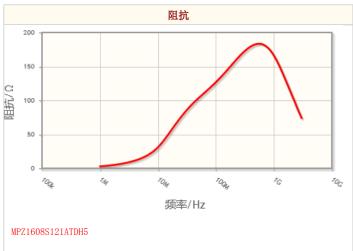

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.



MPZ1608S121ATDH5










Associated Images



[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.