

全显示效果图


| PIN  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9   | 10  | 11  | 12 | 13 | 14  | 15   | 16   | 17   | 18   | 19   | 20   | 21   | 22   |
|------|----|----|----|----|----|----|----|----|-----|-----|-----|----|----|-----|------|------|------|------|------|------|------|------|
| COM1 | 5F | 5A | 6F | 6A | 7F | 7A | S4 | S5 | 10A | 10F | 9A  | 9F | 8A | 8F  | COM1 |      |      |      |      |      |      |      |
| COM2 | 5G | 5B | 6G | 6B | 7G | 7B | S3 | S6 | 10B | 10G | 9B  | 9G | 8B | 8G  |      | COM2 |      |      |      |      |      |      |
| COM3 | 5E | 5C | 6E | 6C | 7E | 7C | S2 | S7 | 10C | 10E | 9C  | 9E | 8C | 8E  |      |      | COM3 |      |      |      |      |      |
| COM4 |    | 5D | P6 | 6D | P7 | 7D | S1 | S8 | 10D | S14 | 9D  |    | 8D | S10 |      |      |      | COM4 |      |      |      |      |
| COM5 | 1F | 1A | 2F | 2A | 3F | 3A | 4F | 4A |     | X14 | X13 | X6 | X5 | S9  |      |      |      |      | COM5 |      |      |      |
| COM6 | 1G | 1B | 2G | 2B | 3G | 3B | 4G | 4B | X19 | X15 | X12 | X7 | X4 | S11 |      |      |      |      |      | COM6 |      |      |
| COM7 | 1E | 1C | 2E | 2C | 3E | 3C | 4E | 4C | X18 | X16 | X11 | X8 | X3 | S12 |      |      |      |      |      |      | COM7 |      |
| COM8 |    | 1D | P2 | 2D | P3 | 3D | P4 | 4D | X1  | X17 | X10 | X9 | X2 | S13 |      |      |      |      |      |      |      | COM8 |




大连奇耘电子有限公司  
DALIAN QIYUN DISPLAY CO., LTD.

确认此型号所有图纸;签字确认:

|  |                 |                              |                               |                                  |         |                 |
|--|-----------------|------------------------------|-------------------------------|----------------------------------|---------|-----------------|
| DESIGNED BY:<br><b>ZN</b>                  | GDC03077T(P)-14 | VERSION: 4.0<br>NO. 1 OF 2   | 1. DISPLAY TYPE: HTN/POSITIVE | 6. POLARIZER TYPE: TRANSFLECTIVE | VERSION | REVISION RECORD |
| CHECKED BY:<br><b>HQM</b>                  |                 | UNIT: mm<br>DATE: 2014-11-28 | 2. OPERATING VOLTAGE: 3.15V   | 7. VIEWING DIRECTION: 12:00      | 1.0     | 初版              |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:±0.2 |                 |                              | 3. DRIVE MODE: 1/8D,1/4B      | 8. CONNECTOR: PIN                | 2.0     |                 |
|  |                 |                              | 4. OPERATING TEMP: -40°C~70°C | 9. CUSTOMER NO:                  | 3.0     |                 |
|  |                 |                              | 5. STORAGE TEMP: -40°C~80°C   | 10. LCM NO:                      | 4.0     |                 |

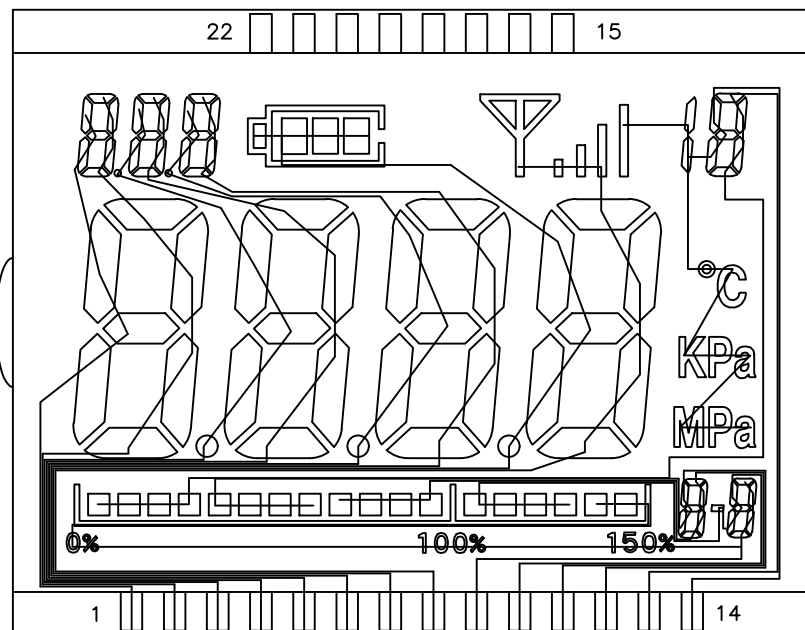

SEG

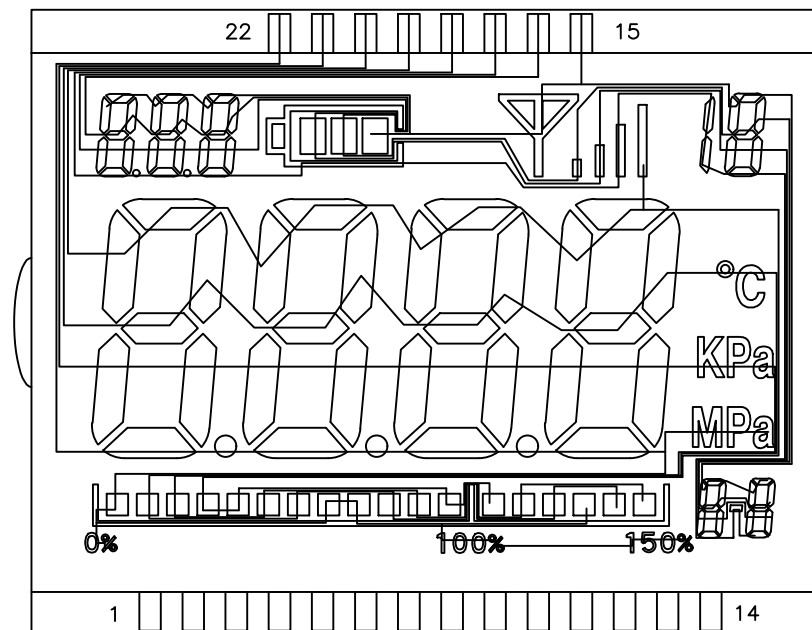

COM



大连奇耘电子有限公司

DALIAN QIYUN DISPLAY CO., LTD.

DESIGNED BY:

ZN


GDC03077T(P)-14

VERSION: 4.0

NO. 2 OF 2

CHECKED BY:

HQM



UNIT: mm

DATE: 2014-11-28

TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2