
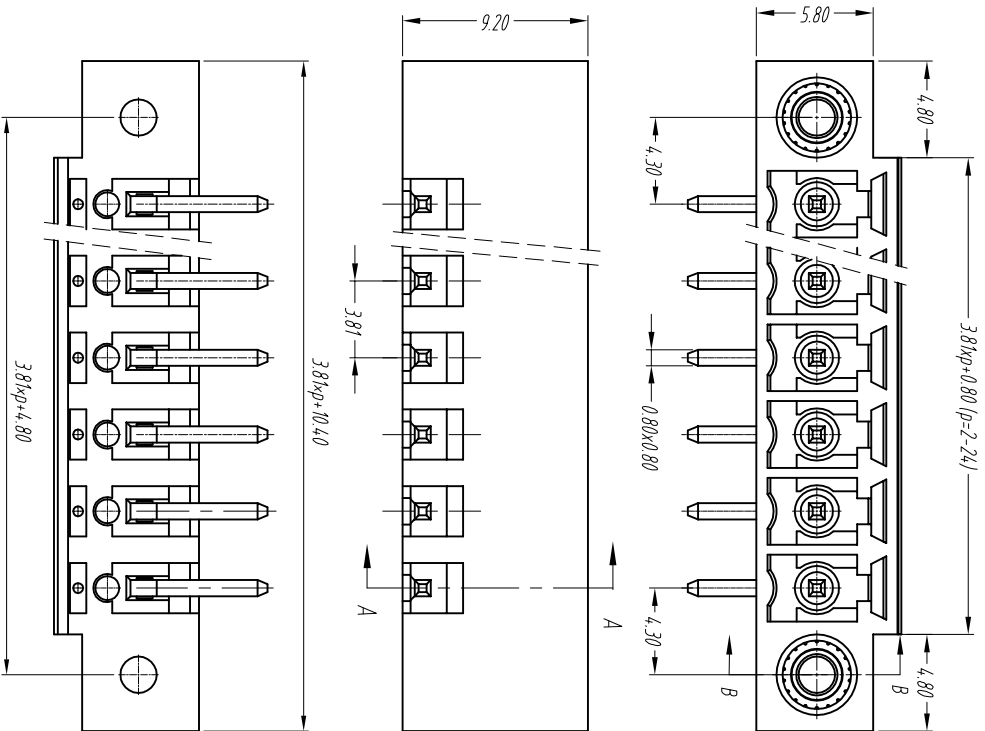


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	出版发行		

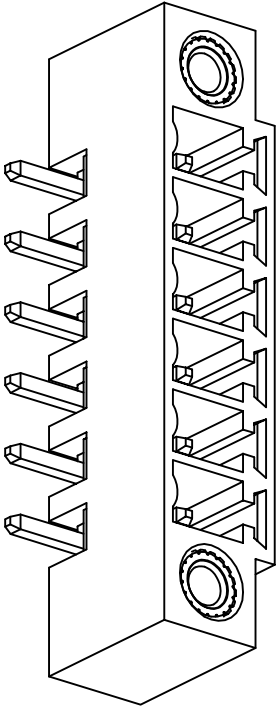

SECTION B-B

SECTION A-A

- NOTES:**
1. Voltage Rating: 300V, Current Rating: 8A
 2. PITCH: 3.81mm
 3. Insulation Withstands Voltage: AC3000V/min
 4. Insulation Resistance:100M Ω or more at DC500V
 5. Using Temperature Range: -40 $^{\circ}$ C - +105 $^{\circ}$ C
- 技术要求:**
- 1.额定电压: 300V, 额定电流: 8A
 - 2.间距: 3.81mm
 - 3.耐压电压: AC 3000V/min
 - 4.绝缘电阻:100兆欧
 - 5.使用条件: -40 $^{\circ}$ - +105 $^{\circ}$

TOLERANCES EXCEPT AS NOTED

	linear dimension				fillet	chamfer	spot angle				—				//				⊥			
	over	over	over	over			over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
variable	6	30	120	480			6	10	50	120		5	30	120		5	30	120		5	30	120
range	to	to	to	to	all		to	to	to	to	all	to	to	to		to	to	to		to	to	to
	6	30	120	480			6	10	50	120		5	30	120		5	30	120		5	30	120
Tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1 $^{\circ}$	30 $^{\circ}$	20 $^{\circ}$	10 $^{\circ}$	0.3	0.025	0.06	0.12	0.4					

3	LZ1-耳朵螺母	SNM0250010V	2	黄铜	
2	LZ1-3.81-弯针	1003B00020V	P	黄铜	镀锡
1	LZ1M-3.81-本体	1003M40XXAV	1	PA6-70	绿色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	201407/22	UNITS	MM
CHK.	DATE	SIZE	A4		
APP.	DATE	SCALE	2.5:1	DWG NO.	SP-2-1003001
上海联捷电气有限公司 Shanghai Binker Electric C.O.,LTD				TITLE	LZ1RM-3.81-XP-140-00A LZ1RM-3.81