
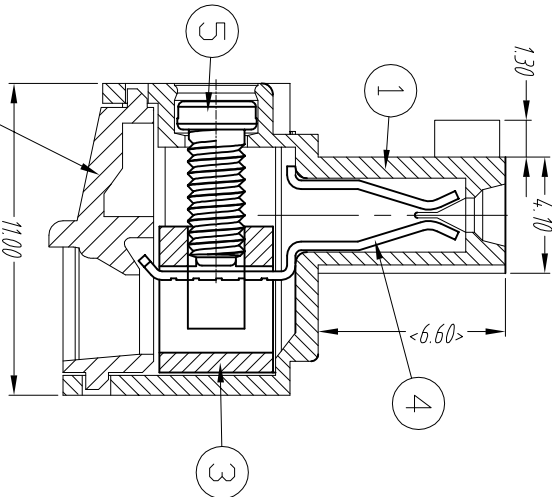
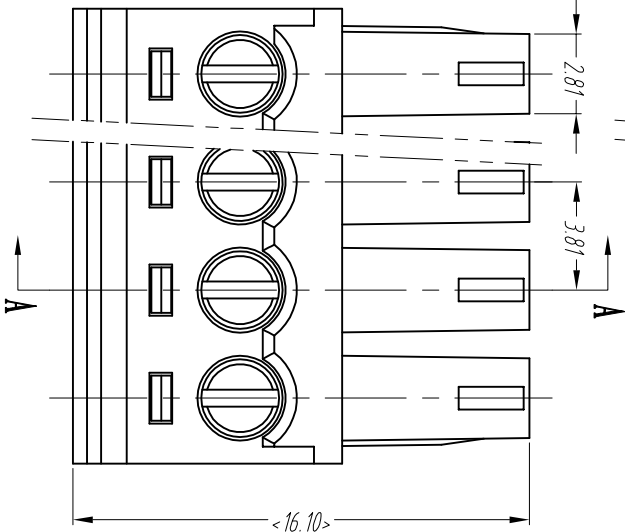


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
1/0	新发行		

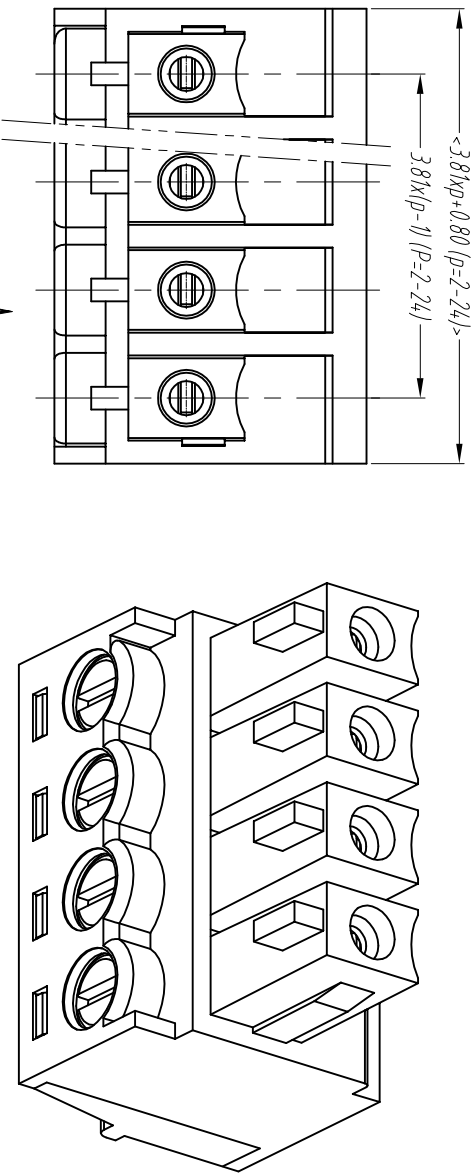

TOLERANCES EXCEPT AS NOTED

SECTION A-A

### 技术要求:

1. 额定电压: 300V, 额定电流: 8A
2. 间距: 3.81mm
3. 耐电压值: AC 2500V/min
4. 绝缘电阻: 1000兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 28-16AWG
7. 螺丝扭力: 0.22-0.25Nm

### NOTES:

1. Voltage Rating: 300V, Current Rating: 8A
2. PITCH: 3.81mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 1000MΩ or more at DC500V
5. Using Temperature Range:-40° C - +105° C
6. Suitable Electric Wire: 28-16AWG
7. Screw Torque Value: 0.22-0.25Nm

		linear dimension				fillet	chamfer	∠ short angle sid				≡	—	□		//	⊥
		over	over	over	over			over	over	over	over						
variable range	6 to	6 to	30 to	120 to	480 to	all	6 to	6 to	10 to	50 to	120 to	all	5 to	over 5	over 30	over 120	
	to 6	to 30	to 120	to 480	to 6		to 10	to 50	to 120	to 5	to 30		to 120				
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.3	0.025	0.06	0.12	0.4

5	LCI-3.81-螺丝	SSM0200010V	P	碳钢	三价铬钝化彩锌
4	LCI-3.81-夹子	1002B00010V	P	磷青铜	镀镍
3	LCI-3.81-铜方块	F000000020V	P	黄铜	镀镍
2	LCI-3.81-盖子	1002C400XAY	1	PA66-V0	绿色
1	LCI-3.81-本体	1002A400XAY	1	PA66-V0	绿色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	2010/5/8	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	4:1
上海联捷电气有限公司			TITLE		
Shanghai Elinker Electric CO., LTD			LCI-3.81-XP-140-00A		
			LCI-3.81-成品		