

FOR HIGH PULSE CURRENT IOT-ER34615/HPC1520






- › INSTANT VOLTAGE RESPONSE
- › WIDE OPERATING TEMPERATURE RANGE
- › EXTREMELY LOW SELF DISCHARGE RATE

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)

- | | |
|--|----------------|
| • Capacity to 3.0V (@250mA @1% duty cycle) | 19Ah |
| • Nominal voltage | 3.6V |
| • Maximum 1 second pulse to 3.0V | 1A |
| • Maximum pulse length @125mA to 2.8V | 1000sec |
| • Delay time to 3.0V @125mA | No Delay |
| • Weight | 138gr |
| • Operating temperature range | -40°C to +85°C |
| • Capacity retention after 10 years | 95% |

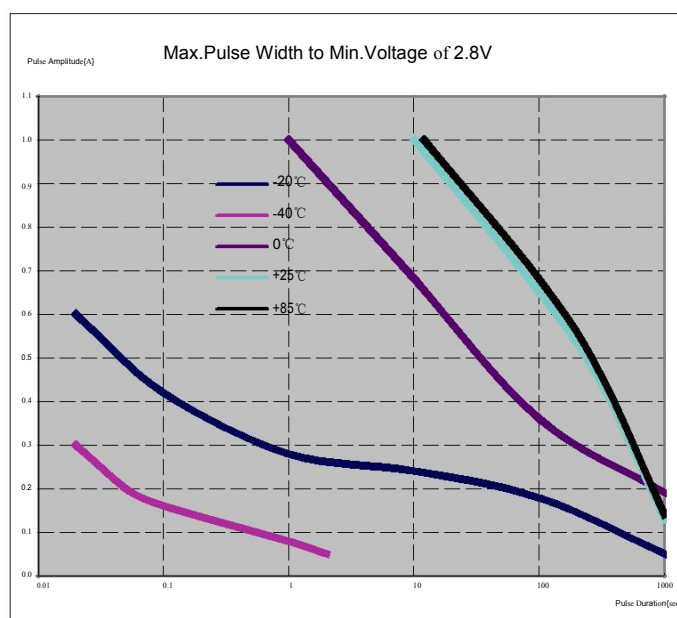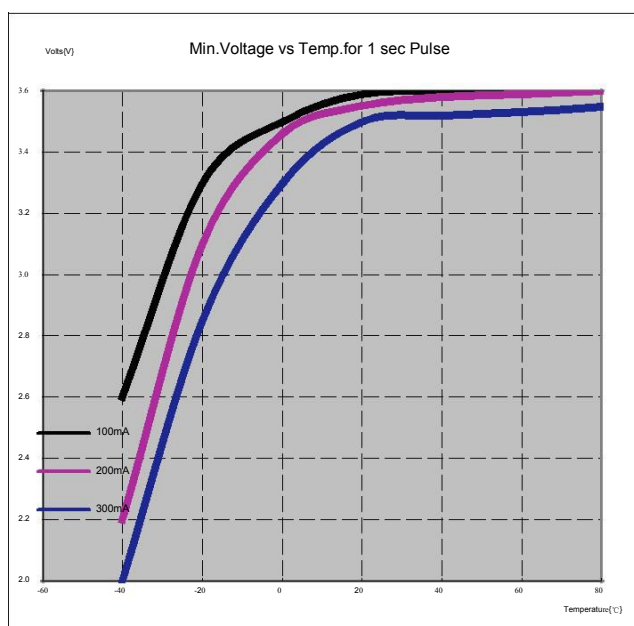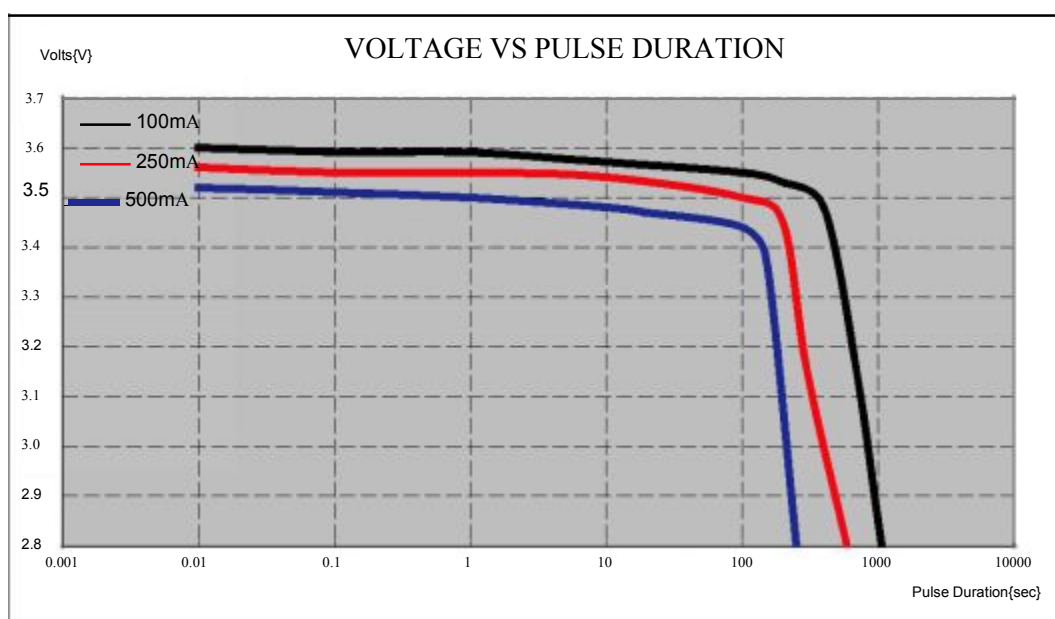

LONGSING TECHNOLOGY GROUP (HONG KONG) LTD

PHONE: +852-2150-1919 FAX: +852-3958-5868 www.longsingtechnology.com

ADDRESS: Rm1501, Millennium City5, 418 Kwun Tong Road, Kwun Tong, Kowloon





FOR HIGH PULSE CURRENT IOT-ER34615/HPC1520



- › INSTANT VOLTAGE RESPONSE
- › WIDE OPERATING TEMPERATURE RANGE
- › EXTREMELY LOW SELF DISCHARGE RATE

The battery is designed specifically for applications requiring low background currents combined with high current pulse. The high pulse current battery combines the inherent benefit of bobbin type lithium thionyl cell with a novel hermetically sealed Hybrid Pulse Capacitor (HPC). The addition of the HPC enhances the performance of the lithium thionyl chloride cell to meet large pulse current requirements, thus providing greater performance and safety in comparison to jellyroll construction (spirally wound) type batteries.

*The PTC is optional and not necessary in many cases

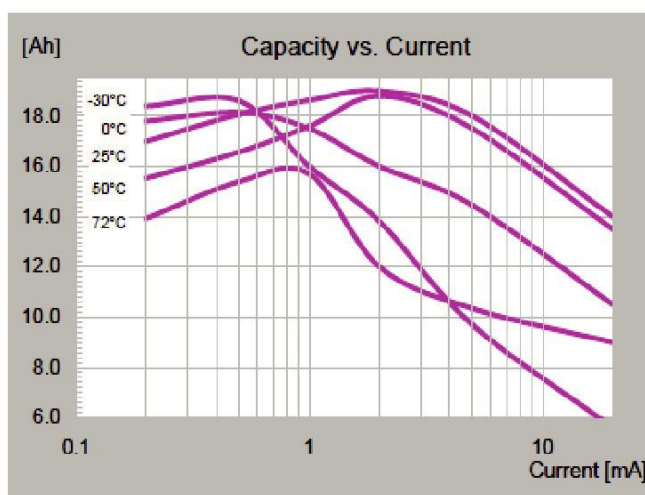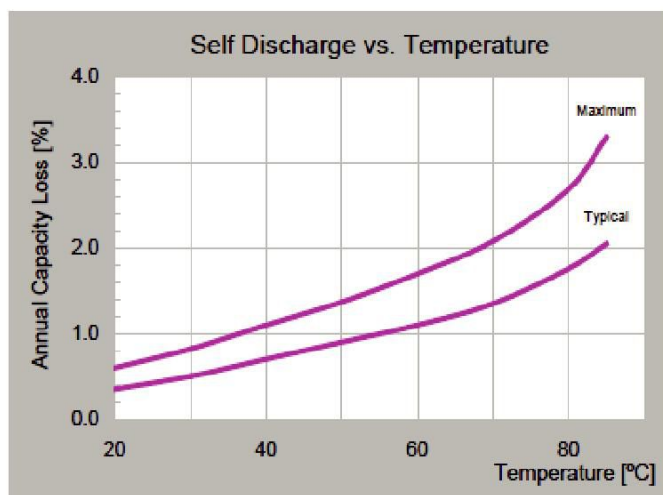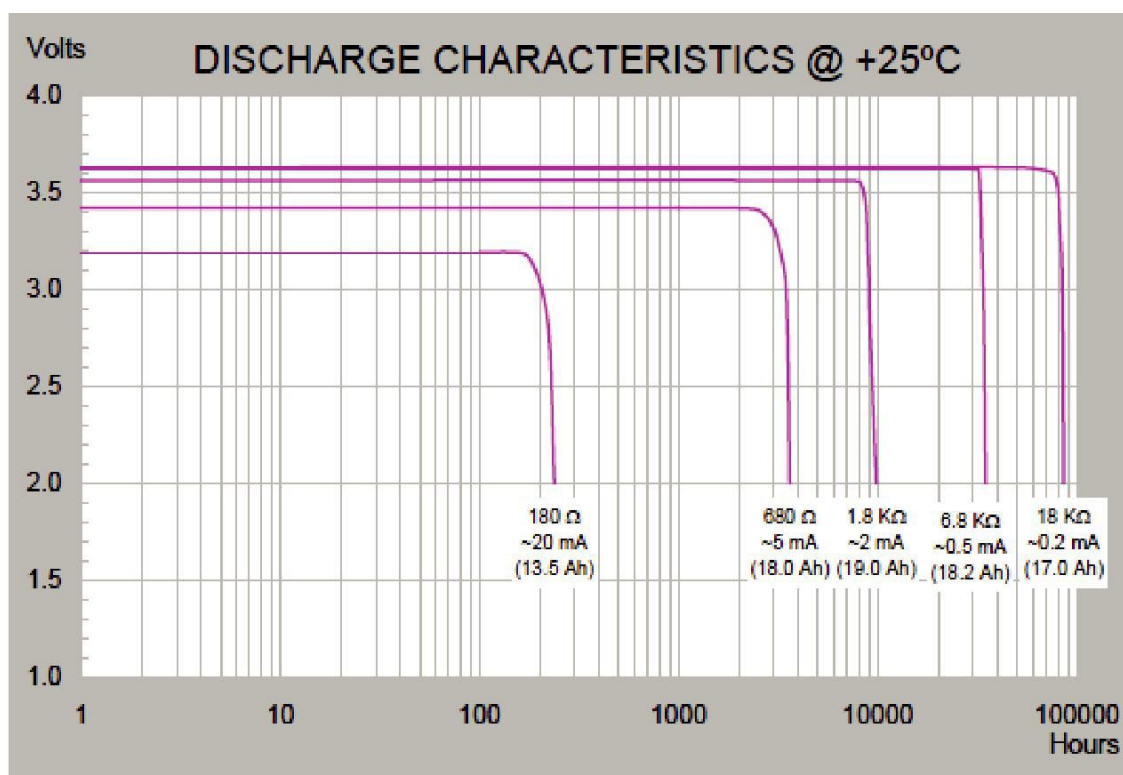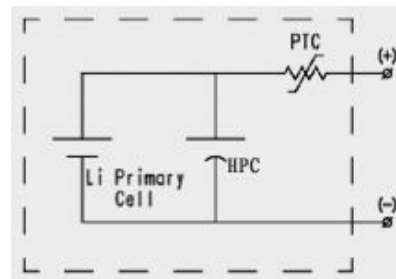

LONGSING TECHNOLOGY GROUP (HONG KONG) LTD

PHONE: +852-2150-1919

FAX: +852-3958-5868

www.longsingtechnology.com

ADDRESS: Rm1501, Millennium City5, 418 Kwun Tong Road, Kwun Tong, Kowloon