

UNIVERSITY OF TORONTO

AER407 - SPACE SYSTEMS DESIGN

SPACE ROBO KORPORATION

---

# Final Report for Canada's Next Generation Robotics

---



Operations	Guanchu Liu (999183011)
Systems	Lian Liu (998700892)
Mechanical	Jai Bansal (999856179)
Electrical	Hao Xing (999261345)
Controls	Yun-Jae Kim (999870947)

December 6, 2015

## Revision History

Revision	Description	Author(s)
1.0	Creation of Document	

## List of Nomenclature

**ARM** Asteroid Retrieval Mission

**ATCS** Active Thermal Control System

**CGP** Controlled Goods Program

**CLU** Camera and Lighting Unit

**DOF** Degrees of Freedom

**DRO** Distant Retrograde Orbit

**EML2** Earth-Moon Lagrange point 2

**ERA** European Robotic Arm

**ESA** European Space Agency

**EVA** Extravehicular Activity

**FFBD** Functional Flow Block Diagram

**GC** Ground Control

**IDSS** International Docking System Standard

**ISECG** International Space Exploration Coordination Group

**ISO** International Organization for Standardization

**ISS** International Space Station

**LEO** Low Earth Orbit

**LO** Lunar Outpost

**LOS** Loss of Signal

**MLBD** Mission-Level Block Diagram

**MPCV** Multi-Purpose Crew Vehicle

**PTCS** Passive Thermal Control System

**RFP** Request for Proposal

**SBD** System Block Diagram

**SHD** System Hierarchy Diagram

**SLS** Space Launch System

**TBC** To be confirmed

**TBD** To be determined

**USA** United States of America

## List of Symbols

**cm** centimetre

**dB** decibel

$^{\circ}$  degree

$^{\circ}\text{C}/\text{s}$  degrees Celsius per second

$^{\circ}\text{C}$  degrees Celsius

**GB** gigabyte

$\text{g}/\text{cm}^3$  grams per cubic centimetres

**g** grams

**Hz** Hertz

**kg** kilogram

**kbps** kilobits per second

**MHz** megahertz

$\text{m}/\text{s}$  metres per second

**m<sup>3</sup>** cubic metres

**m** metre

**mm** millimetre

**min** minute

**N m** Newton-metres

**N** Newton

**V** Volt

**W/m<sup>2</sup>** Watt per square metre

**W** Watt

**rad/s** radians per second

## Executive Summary

The following document outlines the design aspects and system requirements of the robotic system involved in the development and maintenance of a future lunar Outpost.

The Operation section

The System section

Mechanical, Electrical, Control

Firstly, an overview of the control aspects of each system is briefly tabulated and described. Then, the subsystem control requirements are clearly defined, and sub-categorized appropriately into functional, or performance requirements. Next, the major control trade-offs are discussed, including autonomy, redundancy, the type of control architecture, and the processor. From the trade studies, a decentralized architecture, both hardware and software redundancy, semi-autonomous control and RAD750 processor are selected. Various control block diagrams are then illustrated for each of the relevant subsystems, as well as an overall control block diagram demonstrating the locations and layout of the various components being actively controlled. Finally, the feedback loops of the system are tabulated and described.

# Contents

<b>1</b>	<b>Overview</b>	<b>1</b>
<b>2</b>	<b>Concept of Proposed System</b>	<b>2</b>
2.1	Background, Objectives, and Scope . . . . .	2
2.1.1	Background . . . . .	2
2.1.2	Goals and Objectives . . . . .	2
2.2	Operational Policies and Constraints . . . . .	3
2.2.1	Operational Policies . . . . .	3
2.2.2	Customer Constraints . . . . .	4
2.2.3	Governmanet Constraints . . . . .	4
2.3	Description of the Proposed System . . . . .	5
2.3.1	Operational Environment . . . . .	5
2.3.2	Major Mission Components and Interconnections . . . . .	6
2.3.3	Interfaces to External Systems or Procedures . . . . .	6
2.3.4	System Capabilities and Functions . . . . .	6
2.3.5	Operational Risk Factors . . . . .	6
2.3.6	Performance Characteristics . . . . .	7
2.3.7	Quality Attributes . . . . .	8
2.4	Modes of Operation . . . . .	8
2.4.1	Modes . . . . .	8
2.4.2	States . . . . .	9
2.4.3	Transition Between Modes . . . . .	9
2.5	User Classes and Other Involved Personnel . . . . .	9
<b>3</b>	<b>Mission Level Block Diagram</b>	<b>10</b>
<b>4</b>	<b>Operational Scenarios</b>	<b>11</b>
<b>5</b>	<b>System Block Diagram</b>	<b>16</b>
<b>6</b>	<b>System Hierarchy Diagram</b>	<b>17</b>
<b>7</b>	<b>System Requirement</b>	<b>18</b>
7.1	Functional Requirements . . . . .	18
7.2	Performance Requirements . . . . .	19
7.3	Constraint Requirements . . . . .	20
7.4	Environmental Requirements . . . . .	20

7.5	Drivers . . . . .	21
<b>8</b>	<b>System Level Trade Studies</b>	<b>22</b>
8.1	Mechanical Tradeoffs . . . . .	22
8.1.1	Level of Autonomy . . . . .	22
8.1.2	Thermal Control System . . . . .	24
8.2	Electrical Tradeoffs . . . . .	25
8.2.1	Power Generation and Storage System . . . . .	25
8.3	Control/Software Tradeoffs . . . . .	26
8.3.1	Communication Link . . . . .	26
<b>9</b>	<b>Subsystem Requirements</b>	<b>27</b>
9.1	Subsystem LM: Locomotion . . . . .	27
9.2	Subsystem DH: Data Handling and Processing . . . . .	29
9.3	Subsystem TC: Thermal Control . . . . .	32
9.4	Subsystem PS: Power Supply . . . . .	35
9.5	Subsystem EE: End Effector . . . . .	37
9.6	Subsystem SR: Sensors . . . . .	40
9.7	Subsystem FR: Frame . . . . .	42
<b>10</b>	<b>Trade Studies</b>	<b>43</b>
10.1	Mechanical Trade Studies . . . . .	43
10.2	Mechanical Trade Studies . . . . .	43
10.2.1	Architecture . . . . .	43
10.2.2	Material of Frame . . . . .	46
10.2.3	End Effector . . . . .	46
10.2.4	Locomotion - Motor type . . . . .	48
10.2.5	Locomotion - Joint type . . . . .	48
10.3	Electrical Trade Studies . . . . .	49
10.3.1	Power Storage . . . . .	49
10.4	Type of Thermal Control System . . . . .	49
10.4.1	Type of Network Topology . . . . .	49
10.4.2	Type of Data Communication System - Wired vs. Wireless . . . . .	49
10.4.3	Type of Redundancy in System . . . . .	49
10.5	Controls Trade Studies . . . . .	49
10.6	Control Trade Studies . . . . .	49



<b>11 System Architecture</b>	<b>50</b>
11.1 Mechanical Architecture . . . . .	50
11.2 Electrical Architecture . . . . .	50
11.3 Control Architecture . . . . .	50
<b>12 Detailed Design</b>	<b>51</b>
12.1 Mechanical Design . . . . .	51
12.2 Electrical Design . . . . .	51
12.3 Control Design . . . . .	51
<b>13 Budget</b>	<b>52</b>
13.1 Mass Budget . . . . .	52
13.2 Power Budget . . . . .	52
13.2.1 Average Power Budget . . . . .	52
13.2.2 Peak Power Budget . . . . .	52
<b>14 Conclusion</b>	<b>53</b>
<b>References</b>	<b>54</b>
<b>A Load Calculations</b>	<b>58</b>
<b>B Transmitting Frequencies of Subsystems</b>	<b>62</b>
<b>C Temperature Range of Components</b>	<b>63</b>
<b>D Power Consumption of various sensor types</b>	<b>65</b>
<b>E Joint Motion Range for Canadarm2 and ERA</b>	<b>66</b>

## List of Figures

1	Mission-Level Block Diagram . . . . .	10
2	Functional Flow Block Diagram . . . . .	11
3	Deployment FFBD . . . . .	12
4	Maneuvering FFBD . . . . .	13
5	Attaching FFBD . . . . .	14
6	Detaching FFBD . . . . .	15
7	System Block Diagram . . . . .	16
8	System Hierarchy Diagram . . . . .	17
9	Sketch of 14DOF arm . . . . .	44
10	Sketch of 7DOF arm . . . . .	45
11	Sketch of 14DOF arm with truss . . . . .	45
12	Axis used to calculate moment of inertia . . . . .	59
13	Maximum loading configuration of system . . . . .	60
14	Typical Spacecraft Design Temperatures . . . . .	63
15	End Effector Load Limits . . . . .	63
16	Requirements for Inspection Systems . . . . .	64

## List of Tables

1	Customer Constraints . . . . .	4
2	Government Constraints . . . . .	4
3	Description of Operational Environment . . . . .	5
4	Operational Risk Factors . . . . .	6
5	Trade Study for Level of Autonomy . . . . .	23
6	Trade Study for Type of Thermal Control System . . . . .	24
7	Trade Study for Power Generation and Storage System . . . . .	25
8	Trade Study for Communication Link . . . . .	26
9	Trade Study of Architecture . . . . .	46
10	Trade Study for type of End Effector . . . . .	47
11	Trade Study for type of Joint . . . . .	48
12	Vibration design, shock design and testing characteristics of Delta IV . . . . .	61
13	Vibration design, shock design and testing characteristics of Atlas V . . . . .	61
14	Frequencies of Subsystems . . . . .	62
15	Operational and Survival Temperature Ranges of various Components . . . . .	63

16	Power consumption of sensors . . . . .	65
17	Joint motion range for Canadarm2 and ERA . . . . .	66

# 1 Overview

## 2 Concept of Proposed System

### 2.1 Background, Objectives, and Scope

#### 2.1.1 Background

According to the International Space Exploration Coordination Group (ISECG), the human-robot exploration of Mars is the next ultimate step in space-exploration [1]. As a transition phase to Mars, Moon revisiting and asteroids exploration missions are planned by various nations. For example the European Space Agency (ESA) is interested in conducting sample return missions on Phobos or the Moon. The United States of America (USA) is currently developing the Orion Multi-Purpose Crew Vehicle (MPCV) and the new Space Launch System (SLS) that could serve future human-robotic Mars missions and Asteroid Retrieval Mission (ARM) [1].

To facilitate a common platform for the future missions and objectives of different nations, a lunar Outpost stationed at Earth-Moon Lagrange point 2 (EML2) was recently proposed. EML2 is located at the far side of the Moon, an Outpost staged there would provide the direct control of the robotic systems, which perform explorations or constructions on far side of the lunar surface [2]. The Outpost could also provide service for reusable robotic and human lander systems, initial analysis and curation of lunar sample materials collected from the surface of the moon etc. The Outpost could also serve as a staging area for Mars exploration vehicles assembly because it would reduce the size and number of stages that have to be assembled in orbit [3].

A robotic system on the Outpost would provide great assistance for the vehicle assembly tasks. More importantly, the robotic system would serve an important role for the construction and maintenance of Outpost as proven in the International Space Station missions [4]. Therefore, Canada's next generation robot is considered to provide service and assistance on the Outpost.

#### 2.1.2 Goals and Objectives

On the Outpost, Canada's next generation robotic system will play an important role, facilitating the functions of crew members and space vehicles. The key qualitative goals of this system include versatility, adaptability, advanced mobility and dexterity, as well as the ability to be upgradeable.[1] A multi-purpose system like this will assist Canada and other nations to expand and develop their space exploration programs.

The design of a space robotic system will revolve around objectives of the mission. The first objective includes supporting tasks involving the following five key operations [1] :

1. Outpost Reconfiguration
2. Outpost Inspection, Maintenance and Repair
3. Capture and Berthing of visiting vehicles
4. EVA transport
5. Contingency Operations

Another objective is staying within the constraints defined in the Request for Proposal (RFP) (further discussed in Section 2.2), with a particular focus on the maximum mass and volume. The third objective would be to meet the quantitative requirements laid out in the RFP [1].

## **2.2 Operational Policies and Constraints**

This section gives a detailed description on the policies for acceptable operation and the constraints for the system.

### **2.2.1 Operational Policies**

- The system and its operation shall obey international space laws in compliance with the Outer Space Treaty [5]
- Preferred country of suppliers are USA and Canada
- No restrictions on radioisotopes
- No free-flying capture of Orion MPCV
- Docking and berthing of other vehicles will follow the International Docking System Standard (IDSS) [6]

### 2.2.2 Customer Constraints

Table 1: Customer Constraints

Constraint ID	Constraint	Reference
CC 1	Volume: Less than 3.8 m x 1.8 m x 0.67 m (ARV) or 4.0 m x 1.3 m x 0.58 m (Orion)	[1]
CC 2	Mass: Less than 450 kg (per manifest or system)	[1]
CC 3	Operating Life: Less than 10 years	[1]
CC 4	Hours of continuous operation: TBD	[1]
CC 5	Average power: Less than 450 W, Peak Power: Less than 600 W at 28 V	[1]
CC 6	Able to be operated from Earth, intra-vehicle and extra-vehicle	[1]
CC 7	Able to withstand Loss of Signal (LOS) for up to 30 min and maintain safe state	[1]

### 2.2.3 Government Constraints

Table 2: Government Constraints

Constraint ID	Constraint	Reference
GC 1	Canadian Product Security Control - Controlled Goods Program (CGP)	
GC 2	ISO/TS15066: Robot and robotic devices – Safety of Collaborative Robot	Provide standards and guidelines for collaborative robotic systems
GC 3	Remote Sensing Space Systems Act	Provide standards and guidelines for remote sensing system
GC 4	United States Code: Title 51- National and Commercial Space Programs	Provide codes for general operations

## 2.3 Description of the Proposed System

### 2.3.1 Operational Environment

Table 3 lists several environments that pose risk to the mission. Several conditions in EML2, such as thermal and micro-meteoroid environment are considered less harsh than those in low-earth orbit.

Table 3: Description of Operational Environment

Type	Environment	Value	Description
General	Gravity	Low- or Zero-g (TBC)	Negligible gravitational forces exist at EML2
	Pressure	Negligible (TBC)	Due to the lack of atmosphere and vacuum environment, the pressure is low
	Vibrational Load	TBD	During the launch, the system experiences vibrational loads that can damage the components
Radiation and Charged Particles	Electromagnetic Radiation	Irradiance: 1300 W/m <sup>2</sup> (TBC)	Radiation can corrode equipment and overload cameras; better unit than temperature to quantify thermal energy, because space is vacuum [7]
	Solar Flare	TBD	Release of huge energy and emits radiation [7]
	Cosmic Rays	TBD	High-energy radiation that originates mainly outside the solar system [7]
Foreign Objects	Micro-meteoroid	7000 m/s or greater (TBC) [7]	Very small pieces of rock that moves at high velocity; May damage the system [7]
	Asteroid	Average density: 3.0 to 3.7 g/cm <sup>3</sup> [8]	Small rock that orbits around the sun; May seriously damage the system
	Space Debris	Neglibigle	Collection of man-made object that orbit around the Earth; examples include spent rockets and satellites; May damage the system, but unlikely to be at EML2 [7]



### 2.3.2 Major Mission Components and Interconnections

Refer to Section 3

### 2.3.3 Interfaces to External Systems or Procedures

Refer to Section 3

### 2.3.4 System Capabilities and Functions

The system will assist the lunar Outpost in the mission. The system will conduct the mission with the following functions:

- Reconfigure target modules on the Outpost
- Inspect the Outpost and perform maintenance and repair if necessary
- Capture and berth visiting spacecraft
- Transport Outpost crew performing Extravehicular Activity (EVA)
- Perform contingency operations based on commands from Outpost crew or ground control

Functional Flow Block Diagram (FFBD) in Section 4 provides specific details on each of the above functions.

### 2.3.5 Operational Risk Factors

Major operational risk factors are listed in Table 4 below.

Table 4: Operational Risk Factors

Risk	Cause	Possible Result	Mitigation Plan
<b>Component Malfunction</b>	Manufacturing faults, software errors, and radiation	Loss in operation capabilities; Possible mission failure	Perform thorough testing with safety margins; Implement various redundancies

<b>Risk</b>	<b>Cause</b>	<b>Possible Result</b>	<b>Mitigation Plan</b>
<b>Component Damage</b>	Vibrations during launch and operation, impacts from micro-meteoroids and debris in space, and radiation	Loss in operational capabilities; Possible mission failure	Implement redundancies and safety margins; Ensure sufficient spare parts are available
<b>Human Errors</b>	Exhausted astronauts, ground control making errors	Loss of operational capabilities; Possible mission failure; Possible loss of life	Provide specific operational procedure to astronauts; Require approval prior to commencing operations to prevent accidental operation
<b>Launch Delay</b>	Inclement weather; Systems not ready	Delayed mission	Schedule manufacturing and testing well before launch; Ensure launch day weather is good for launch
<b>Launch Failure</b>	Launch vehicle malfunction	Mission failure	Ensure all systems tested and ready before launch
<b>Lack of Political Will</b>	Negative public sentiment against cost of operation; Major differences between partner countries	Loss of funding; Degraded operations due to lack of funding for regular maintenance; Possible mission failure	Advertise advantages of Outpost; Ensure proper communication between partners to resolve differences

### 2.3.6 Performance Characteristics

The system shall have following performance characteristics

- The system has total mass of 315 kg (See Section 13.1)

- The system will be capable of powering all subsystems with an average power of less than 450 W and peak power of 600 W at 28 V (See Section 13.2)
- The system will be able to self-manipulate around modules of the Outpost
- The system will be able to manipulate loads of up to 10000 kg [1]
- The system will be able to apply holding or reaction forces of 200 N in all directions [1]
- The system will be manufactured such that it is possible to be assembled in space
- The system will have an operating life of 10 years [1]
- The system will be able to perform free-flying capture and docking of visiting spacecraft within a certain time (TBD)
- The system will be able to maintain safe state for up to 30 min of loss of signal
- The system will transmit operation results and mission status to the Outpost

### 2.3.7 Quality Attributes

The following are quality attributes that are used to evaluate the system.

## 2.4 Modes of Operation

### 2.4.1 Modes

**Semi-autonomous:** System performs functions and tasks autonomously with instructions from operators and keeping operators in the loop.

**Manual:** Operator commands the end effectors' translational and rotational velocities, with all joints being moved simultaneously.

**Single-joint:** Operator moves a single joint at a time, while keeping the other joints locked.

**Testing:** System switches on all subsystems one by one and pings each of them to ensure they are working and are able to receive and transmit signals.

**Start-up:** All essential subsystems are switched on.

**Keep-alive:** Non-essential systems are switched off, only data handling and thermal control subsystems are kept on to keep all subsystems within survival temperatures.

### 2.4.2 States

**Standby:** System will return to home position and is ready to receive and execute commands immediately.

**Execution:** System is executing a command.

**Sleep:** Shut down all non-essential subsystems and await wake signal in order to save power.

### 2.4.3 Transition Between Modes

After each operation is completed, system will automatically return to Standby state, where it will await the next command. If commands are queued within the system, system will proceed to next command immediately without returning to Standby state.

## 2.5 User Classes and Other Involved Personnel

**Governments** specify operational policies and constraints for the system. Governments are also the main source of funding for the system.

**Launch Personnel** ensure all parts fit specifications and are able to fit into designated spaces within launch vehicles.

**Ground Operators** will ensure system is operating as expected and intervene if required.

**Outpost Crew** will be operating the system from the lunar Outpost or EVA.

**Maintenance Personnel** are made up of contractors and client engineers who design the system. They will detect and resolve problems to keep the system operational.

**Trainers** will train ground and mission operators on the operation of the system. They are the experts on the system and will possibly be transferred to support personnel after training of operators is complete.

**Science Team** is made up of researchers who analyze data sent from the Lunar Outpost (LO) to Ground Control (GC).

### 3 Mission Level Block Diagram

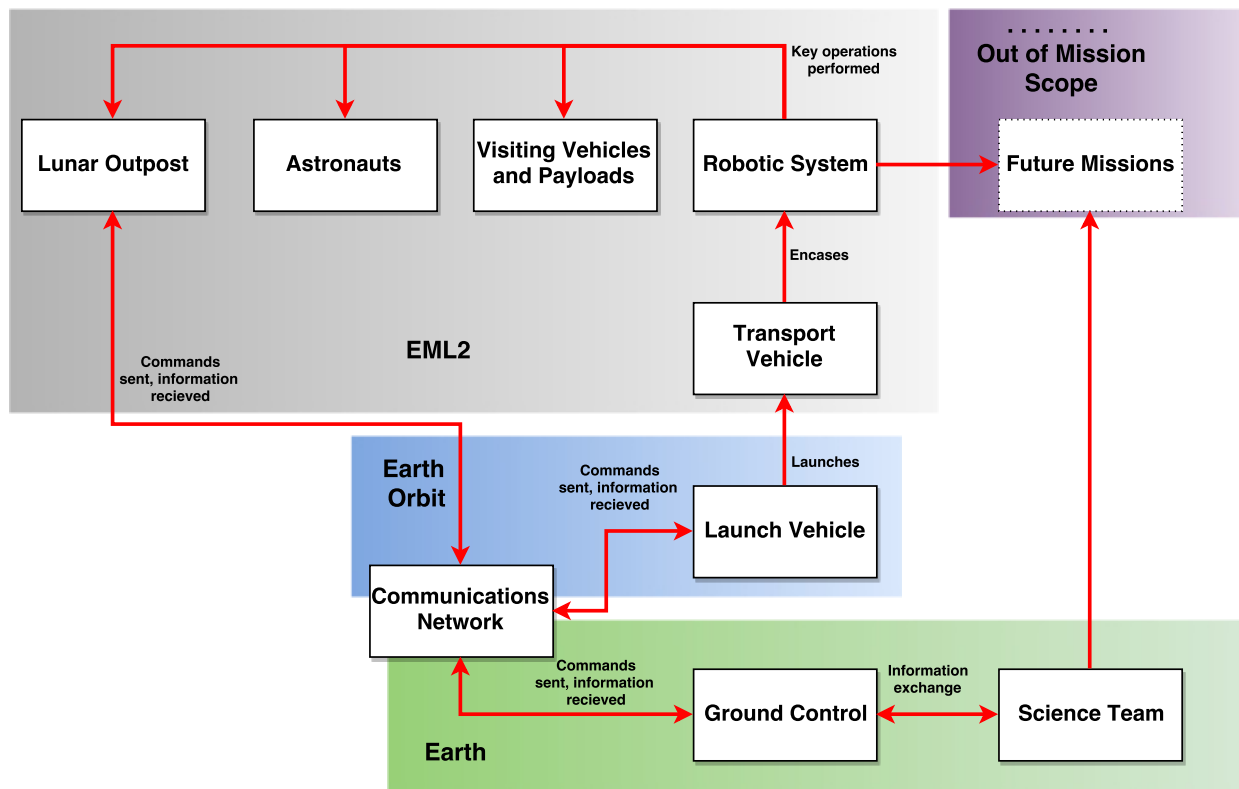


Figure 1: Mission-Level Block Diagram

## 4 Operational Scenarios

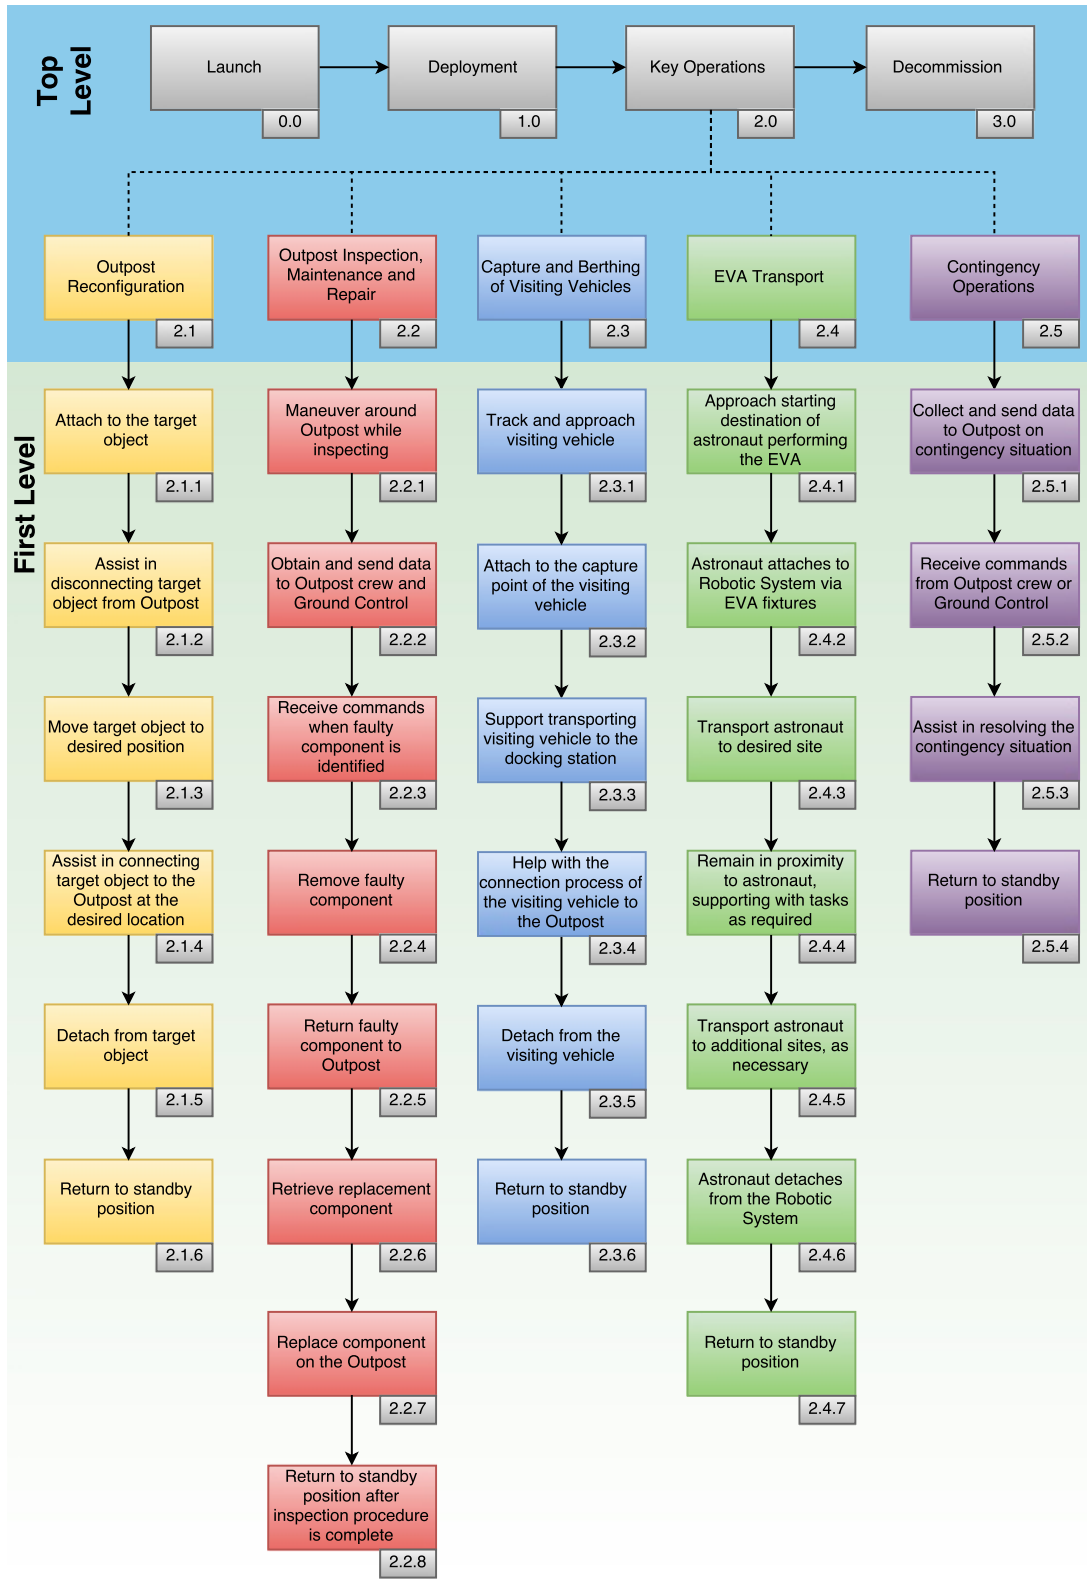


Figure 2: Functional Flow Block Diagram

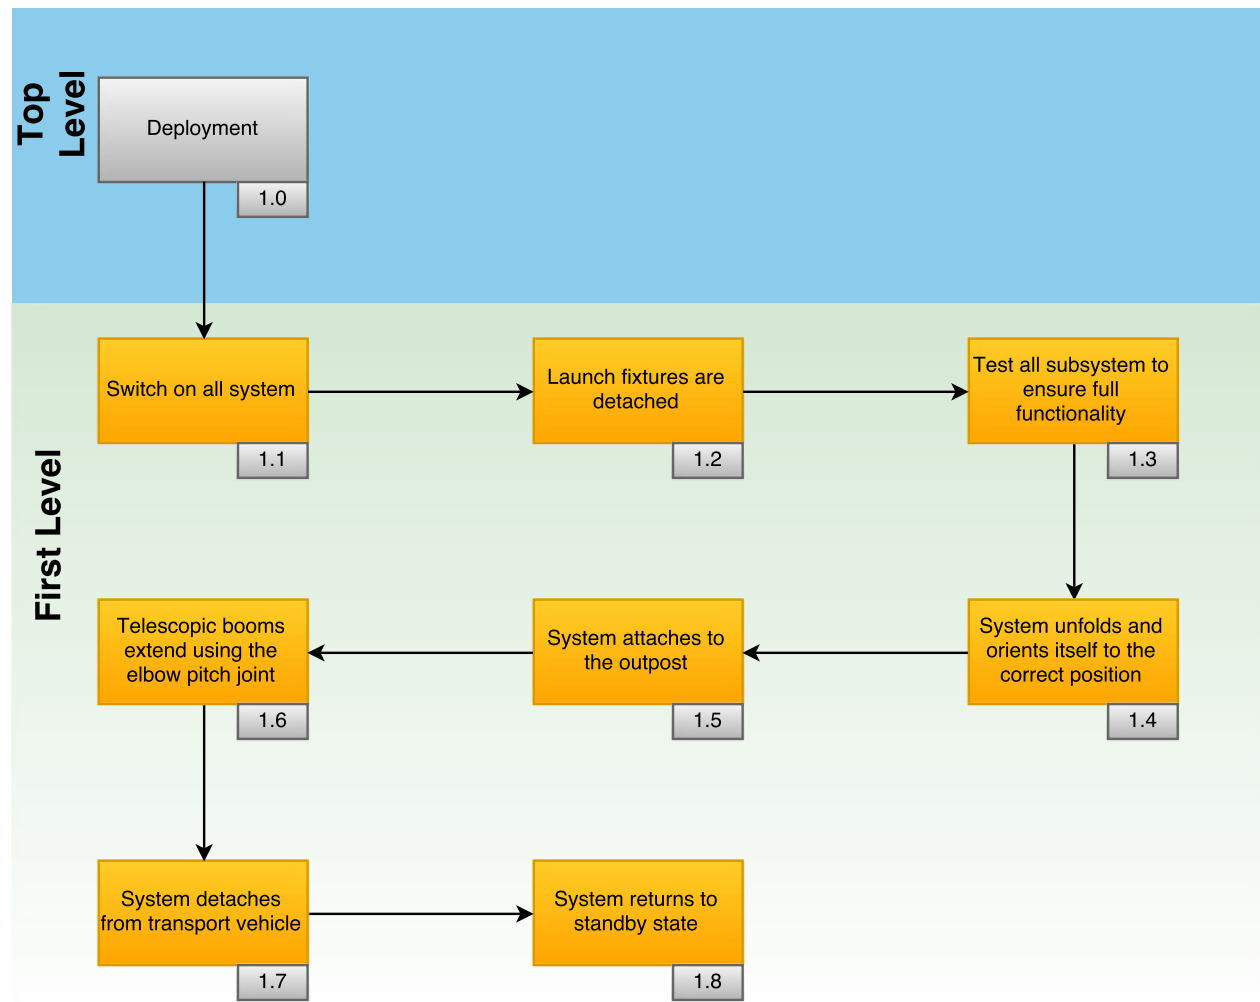


Figure 3: Deployment FFBD

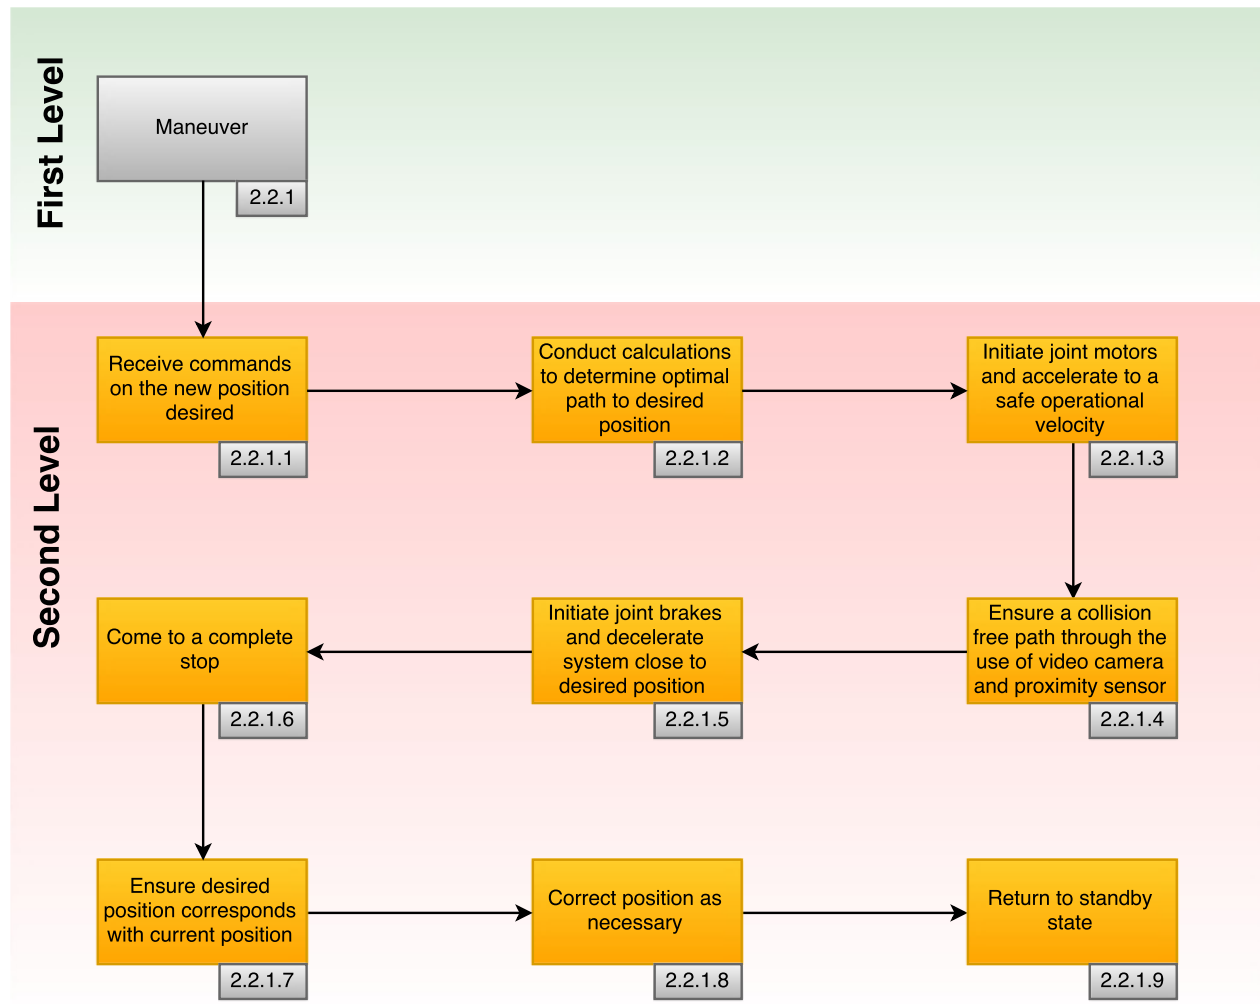


Figure 4: Maneuvering FFBD



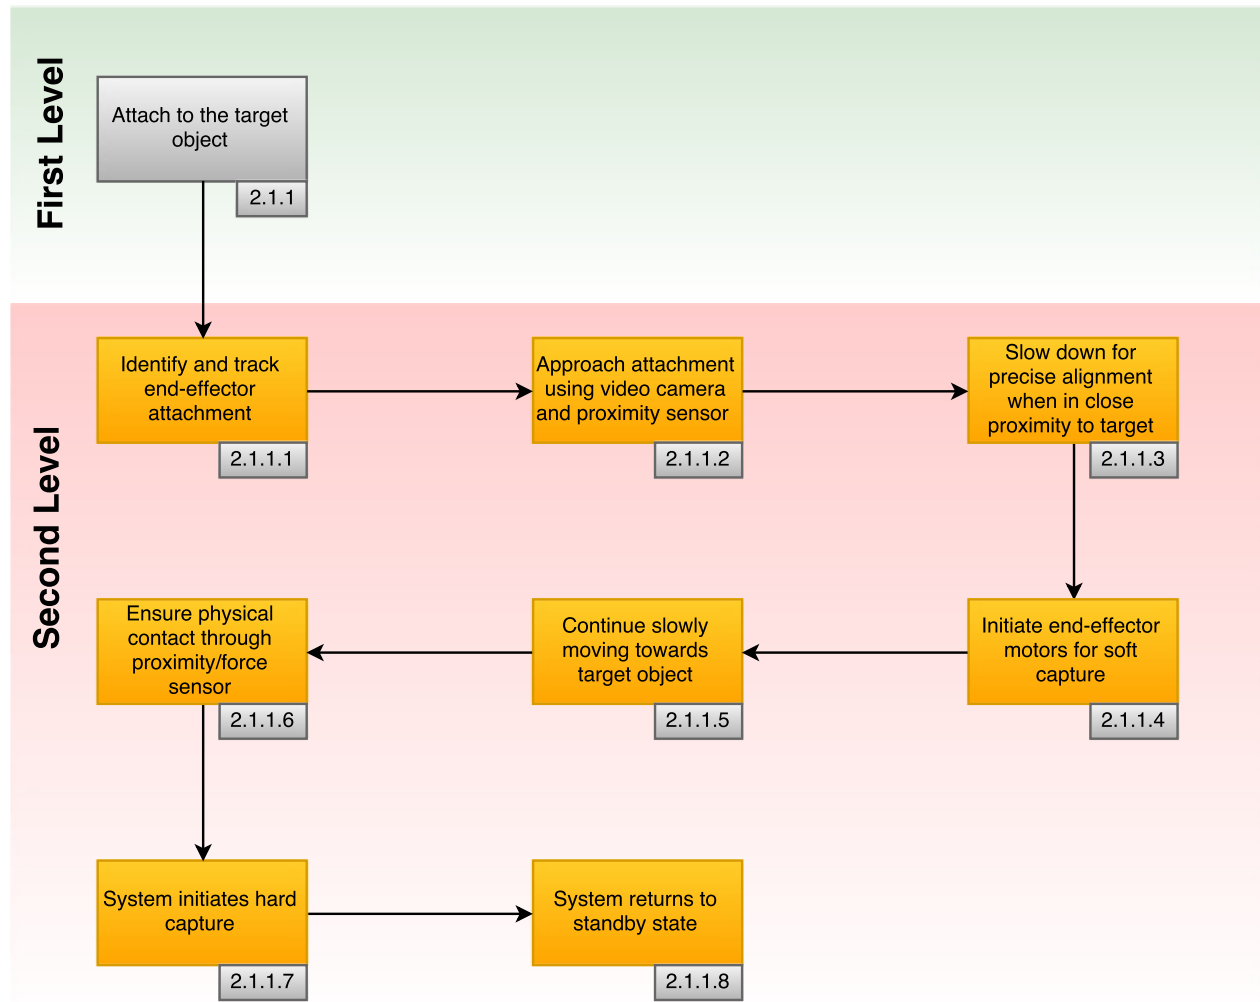


Figure 5: Attaching FFBD

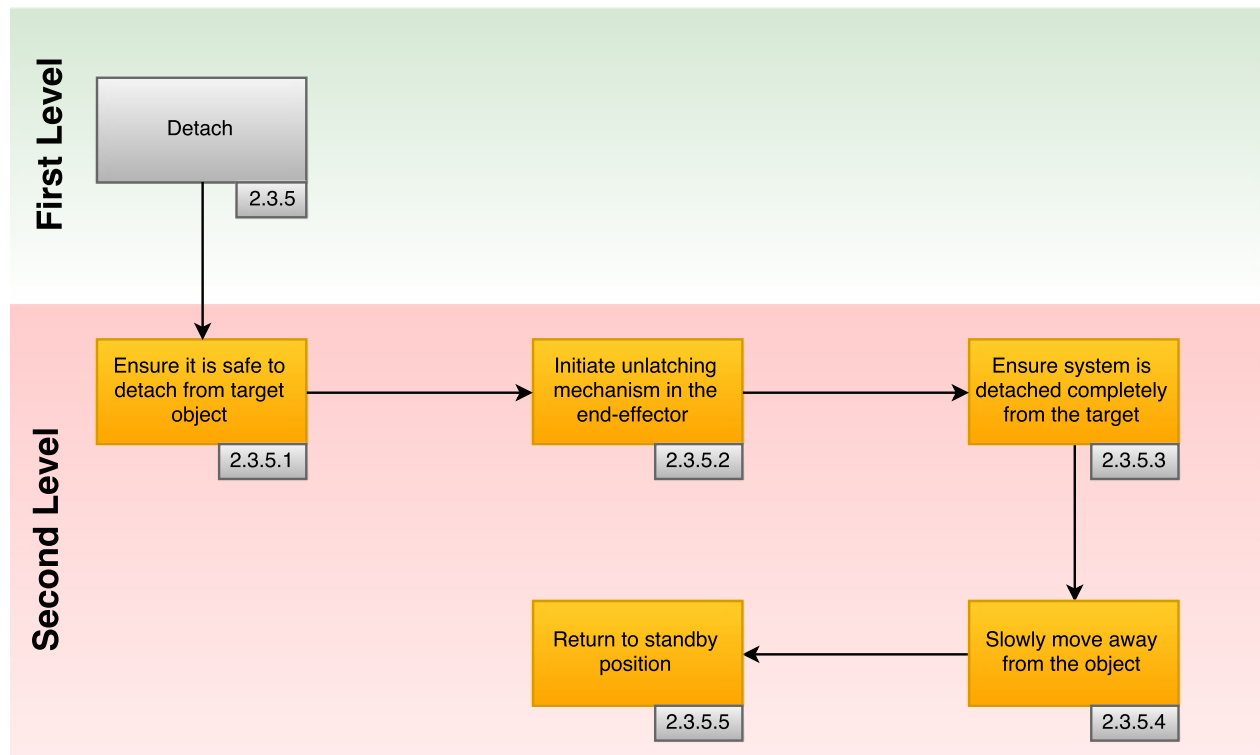


Figure 6: Detaching FFBD

## 5 System Block Diagram

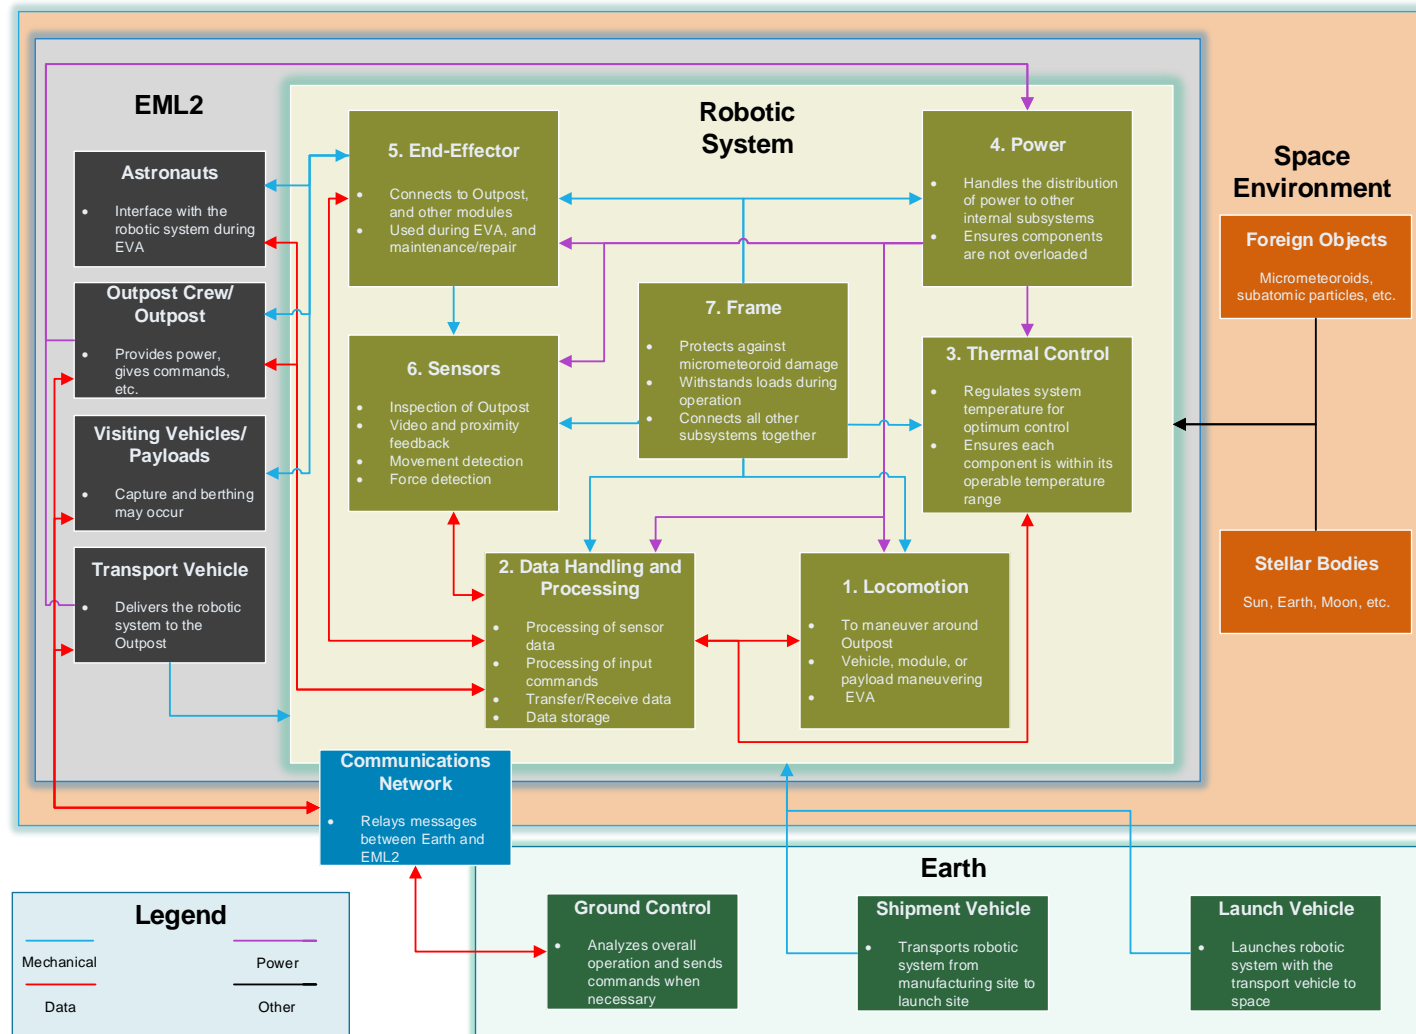


Figure 7: System Block Diagram

## 6 System Hierarchy Diagram

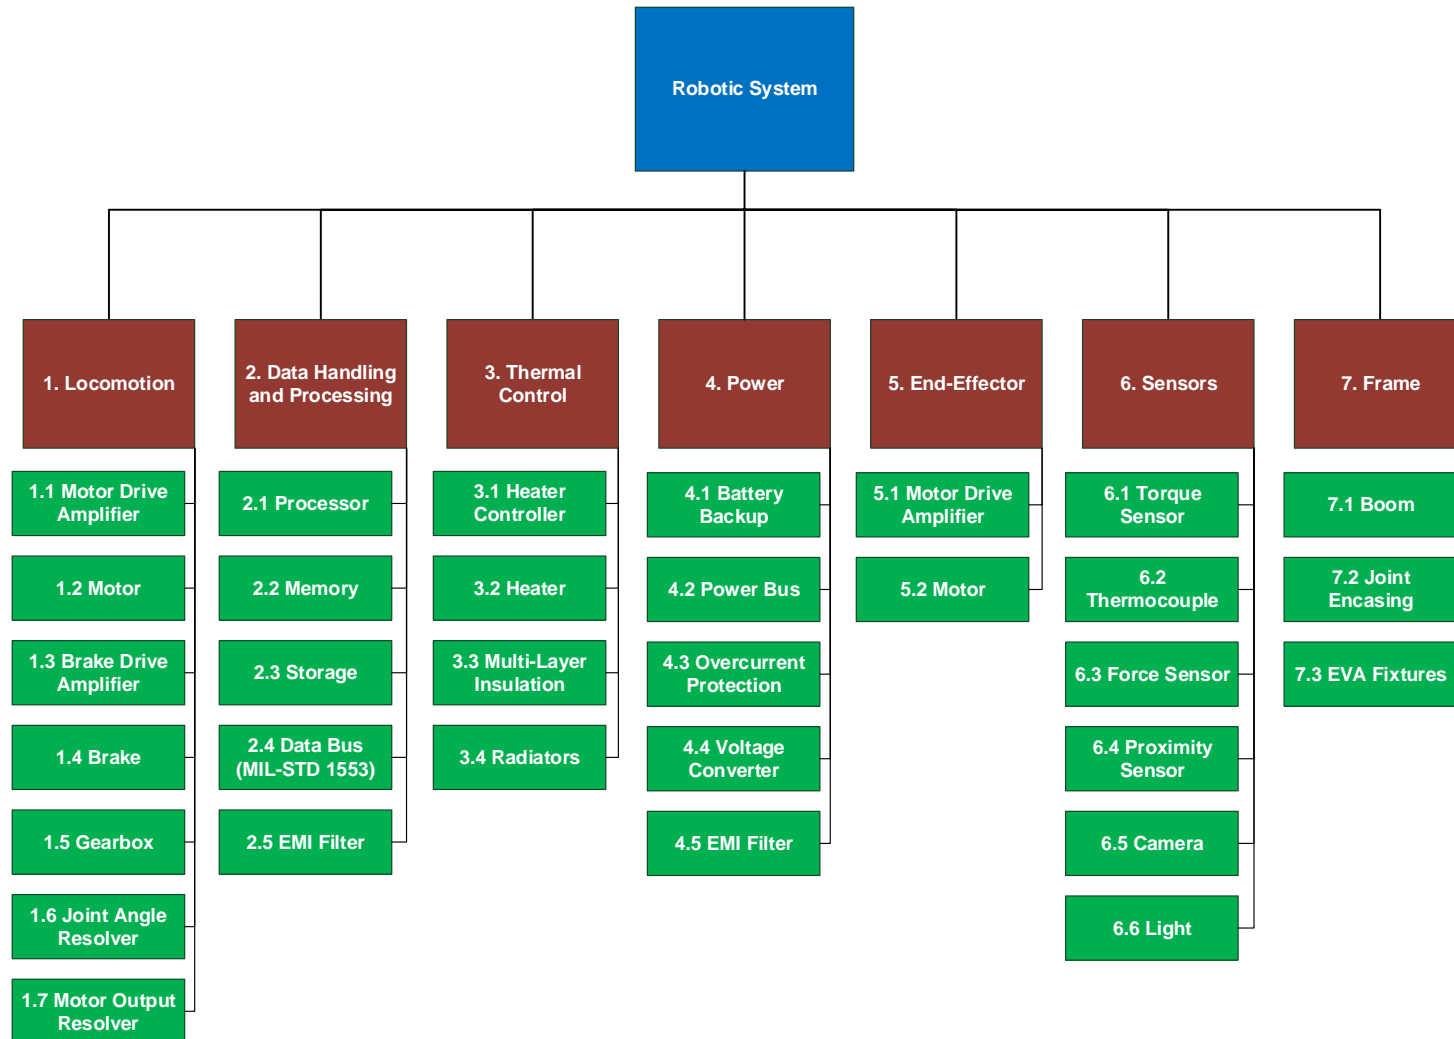


Figure 8: System Hierarchy Diagram

## 7 System Requirement

The following list contains the top-level robotic system requirements. Several of these requirements are drawn from the RFP [1].

### 7.1 Functional Requirements

**S-F-01** The system shall be deployable from the transport vehicle.

*Rationale: Derived from RFP*

*Verified by Ground Testing*

**S-F-02** The system shall attach itself to the Outpost.

*Rationale:*

*Verified by Ground Testing*

**S-F-03** The system shall be able to change the Outpost configuration.

*Rationale: Derived from RFP*

*Verified by Ground Testing*

**S-F-04** The system shall perform inspection of the surface of the Outpost.

*Rationale:*

*Verified by Ground Testing*

**S-F-05** The system shall perform repairs on the Outpost.

*Rationale:*

*Verified by Ground Testing*

**S-F-06** The system shall be able to replace faulty components on the Outpost.

*Rationale:*

*Verified by Ground Testing*

**S-F-07** The system shall send feedback to Outpost crew.

*Rationale:*

*Verified by Ground Testing*

**S-F-08** The system shall be able to capture visiting vehicles and payloads.

*Rationale:*

*Verified by Ground Testing*

**S-F-09** The system shall assist in berthing of vehicles and payloads.

*Rationale:*

*Verified by Ground Testing*

**S-F-10** The system shall operate in Low Earth Orbit (LEO).

*Rationale:*

*Verified by Ground Testing*

- S-F-11** The system shall operate in Lunar Distant Retrograde Orbit (DRO).  
*Rationale:*  
*Verified by Ground Testing*
- S-F-12** The system shall operate at EML2.  
*Rationale:*  
*Verified by Ground Testing*
- S-F-13** The system shall carry out commands from Ground Control.  
*Rationale:*  
*Verified by Ground Testing*
- S-F-14** The system shall carry out commands from the Outpost.  
*Rationale:*  
*Verified by Ground Testing*
- S-F-15** The system shall be able to self-manipulate from one spacecraft to another.  
*Rationale:*  
*Verified by Ground Testing*
- S-F-16** The system shall be transported from manufacturing facility to launch site.  
*Rationale: The robotic system may be manufactured from different site and need to be transported for launch*  
*Verified by Ground Testing*

## 7.2 Performance Requirements

- S-P-01** The system shall manipulate payloads of up to 10000 kg [1].  
*Rationale: Derived from RFP*  
*Verified by Ground Testing*
- S-P-02** The system shall apply holding or reaction forces of 200 N in any direction [1].  
*Rationale: Derived from RFP*  
*Verified by Ground Testing*
- S-P-03** The system shall withstand LOS for up to 30 min.  
*Rationale: Derived from RFP*  
*Verified by Ground Testing*
- S-P-04** The system shall operate for 10 years [1].  
*Rationale: Derived from RFP*  
*Verified by Ground Testing and Analysis*
- S-P-05** The working envelope (work area) of the system shall cover TBD % of the surface area of the Outpost.  
*Rationale: Required for maintenance and inspection operation*

*Verified by Ground Testing and Analysis*

### 7.3 Constraint Requirements

**S-C-01** The system shall have a mass of less than 450 kg [1].

*Rationale: Derived from RFP*

*Verified by analyzing mass of the system before launch*

**S-C-02** The system shall be able to fit into transport vehicle [1].

*Rationale: System needs to be transported inside a vehicle for transportation*

*Verified by measuring dimensions of the system*

**S-C-03** The system shall have an average power usage of 450 W [1].

*Rationale: Derived from RFP*

*Verified by Ground Testing*

**S-C-04** The system shall have a peak power usage of 600 W at 28 V [1].

*Rationale: Derived from RFP*

*Verified by Ground Testing*

**S-C-06** The system shall have single fault tolerance under all operations.

*Rationale: Required for System operation*

*Verified by Ground Testing & Simulation*

### 7.4 Environmental Requirements

**S-E-01** The system shall operate in a vacuum environment.

*Rationale: Operational environment is vacuum*

*Verified by Ground Testing*

**S-E-02** The system shall operate within temperature ranges of -90°C to 200°C [9].

*Rationale: Derived from temperature range in the operational environment*

*Verified by Ground Testing and Simulation*

**S-E-03** The system shall withstand vibrations sustained during transport to launch site.

*Rationale: Vibration may damage parts in the system*

*Verified by Ground Testing*

**S-E-04** The system shall withstand vibrations sustained during launch.

*Rationale: Vibration may damage parts in the system*

*Verified by Ground Testing*

**S-E-05** The system shall withstand electromagnetic radiation of 1300 W/m<sup>2</sup>(TBC) [10].

*Rationale: Radiation affects the surface of the system, electronics, and communication*

*Verified by Ground Testing*

**S-E-06** The system shall withstand solar flares.

*Rationale: Solar flares affect the surface of the system, electronics, and communication*

*Verified by Ground Testing*

**S-E-07** The system shall withstand cosmic rays.

*Rationale: Cosmic rays affect the surface of the system, electronics, and communication*

*Verified by Ground Testing*

**S-E-08** The system shall withstand strikes by foreign objects with TBD momentum.

*Rationale: Foreign objects may damage the surface of the system and the sensors*

*Verified by Ground Testing*

## 7.5 Drivers

The following five requirements are identified as the key design drivers, which will heavily influence the outcome of system design.

**S-P-01: The system shall manipulate payloads of up to 10000 kg [1].**

The requirement that the payloads shall be up to 10000 kg affects the design of all subsystems. This driver influences the materials chosen for the frame, and end-effector. It also affects the types of sensors used on the robotic system and method of locomotion. In addition, design decisions regarding how the system is able to capture/berthing of visiting vehicles and complete Outpost reconfiguration will be influenced by this driver.

**S-P-02: The system shall apply holding or reaction forces of 200 N in any direction [1].**

The requirement that the system shall apply holding or reaction forces of 200 N in any direction is closely related to the EVA and Outpost Repair operations. The design of the end-effector and types of sensors used on the robotic system will be affected by this driver. It also influence the locomotion subsystem as the design of mobility method is affected. And the design of the frame subsystem is naturally affected by this requirement as all these other subsystems changes.

**S-P-05: The working envelope (work area) of the system shall cover TBD % of the surface area of the Outpost.**

The requirement that the working envelope (work area) of the system shall cover TBD % of



the surface area of the Outpost influences the locomotion and end-effector design, as well as the positioning of sensors to ensure that the sensor subsystem is able to analyze the Outpost in detail. In addition, design decisions regarding how the system is able to reach to the ends of the working envelope would also have to be decided. Naturally, the frame subsystem is affected as the design of the robotic system changes.

**S-C-01: The system shall have a mass of less than 450 kg [1].**

The constraint on mass affects the design of all subsystems. This driver influences the materials chosen for the frame, and end-effector subsystem. Additionally, the method of power supply, the types and amounts of sensors used on the robotic system is affected, as well as the hardware of the data handling, and thermal control subsystem. All these design decisions need to be made to fulfill the overall mass requirement. Moreover, the weight of the whole system will also have an influence on the method of shipment.

**S-C-04: The system shall have an average power usage of 450 W [1].**

The power constraint influences all electrical components of the robotic system. It affects the types of sensors selected, the method of power supply and power backup, as well as the hardware choice of the data handling and processing, and thermal control subsystems. In order to complete all the operations within the power constraint, the mobility method of locomotion subsystem and electrical hardware of the data handling subsystem will also be influenced.

## 8 System Level Trade Studies

### 8.1 Mechanical Tradeoffs

#### 8.1.1 Level of Autonomy

The level of autonomy will determine how the operations should be planned and carried out, and will largely influence the design of data handling and control systems. Therefore, it should be discussed here as one of the major trade-offs. Three levels of autonomy are considered and compared, which are listed below and compared in Table 5. A limited-autonomous system requires manual operations by the Outpost crew to complete all tasks, a semi-autonomous system shall be able to conduct basic tasks automatically, like change positions, but will require manual control by Outpost crew to complete more complex tasks while a fully-autonomous system shall be able to complete both all tasks without human intervention.

Table 5: Trade Study for Level of Autonomy

	Limited Autonomous	Semi Autonomous	Fully Autonomous
<b>System Complexity</b>	Easy to develop Rich technological heritage	Existing similar systems Need software development for the specific operations	Technology is hard to achieve Full software development needed
<b>System Reliability</b>	Operation is fully monitored Human errors may occur	Simple tasks may be affected by software and component malfunctions Complex tasks may be affected by human errors	Human error is avoided. Operation could be under software and component malfunctions [11]
<b>Operation Duration</b>	Requires control from the Outpost crew or Astronauts Crew time usage on redundant tasks	Short for simple tasks Longer duration for more complex tasks	No human input required Can operate continuously
<b>Operation Accuracy &amp; Deviation from plans</b>	Deviation from plans is limited by human control May be affected by human errors	Simple Task: not limited by computational resources. Complex Task: Human errors and robotic malfunctions are limited	Limited by computational and power resources

While a fully autonomous system would be ideal for space exploration because it would have high capabilities and efficiency, there are still technical, computational, safety and managerial challenges to overcome before achieving full autonomy. Therefore, taking current technology availability into consideration, a semi-autonomous system has been selected for this robotic system. This will allow the system to perform with relatively lower risk and higher efficiency.

### 8.1.2 Thermal Control System

Thermal regulation systems are required in the system to ensure that temperatures of the system's parts are within the operating ranges. There are two main types of such systems, Active Thermal Control System (ATCS) and Passive Thermal Control System (PTCS).

ATCS makes use of various heating and cooling tools, such as electric heaters, fluid loops and thermoelectric coolers to control the temperature within the system while PTCS makes use of insulation to reduce heat transfer and surface coatings which modify the thermal or optical properties of the surface. These two systems are compared in Table 6.

Table 6: Trade Study for Type of Thermal Control System

	ATCS [12]	PTCS [12]
<b>System Complexity</b>	Complex control system needed to respond rapidly to temperature fluctuations	Only mechanical parts are added
<b>System Reliability</b>	Outpost crew can manually control the temperature in case of breakdown in control system In case of breakdown of the heating and/or cooling elements, only solution is to repair them	Damage will result in loss of ability to maintain other subsystems at their operational temperature ranges
<b>System Efficiency</b>	System can be on Standby mode when temperatures are within operating ranges Only needs to be switched on when temperature is near the limits of operation; Saves power and does its job	System can reduce heat transfer without using any power; Very efficient when there is alternating high and low temperatures System is unable to regulate temperatures when there is prolonged periods of extreme temperatures

According to some further research, it is actually possible to combine these two choices to a semi-active thermal control system [13], which is selected to be used on our robotic system. The main system will be the passive system to slow down the rate of heat transfer between internal components and the exterior environment. The active system will activate when there is excessive heat transfer that the passive system is unable to manage, or when there is damage to the passive system. This allows us to achieve the advantages of power saving and single-fault tolerance in the thermal control system, but we would have to accept the

consequence of increasing the mass of the system and designing a more complex control architecture for the active system.

## 8.2 Electrical Tradeoffs

### 8.2.1 Power Generation and Storage System

Power supply system is required in the system to distributing power to other subsystems and ensuring they function properly. A system level tradeoff on the method of power supply system is discussed in this section. Two options are considered, one is to have an independent power generation system, such as solar panels; the other is to have the robotic system fully powered by the Outpost. Table 7 below provides a detailed comparison between these two options.

Table 7: Trade Study for Power Generation and Storage System

	Independent Power System	Powered by Outpost
<b>System Complexity</b>	Significantly increase the system complexity	Simple system
<b>Mass Required</b>	Significantly increase the mass Common option like solar panels typically cost about 0.02 kg per W [14]	Lower mass, mainly cost by connection cables
<b>System Independence</b>	Can operate without connection to the Outpost	Unable to operate on loss of connection to Outpost If mobile, has to return to the Outpost periodically to recharge

Taking into account the mass constraint, which is one of the main drivers of this project, it is decided that the system will not have its own power generation unit and would instead be powered entirely by the Outpost.

However, the system will have a power storage system onboard, which will be charged while the system is connected to the Outpost and can be used in emergency situations when there is a loss in connection between the Outpost and the robotic system. Further details of the power storage system is discussed in Section 10.3.

## 8.3 Control/Software Tradeoffs

### 8.3.1 Communication Link

For the system level tradeoff on communication link, two options are considered. The first one is to direct communication link with only the Outpost, and the second option is to have direct communication link with both Ground Control and the Outpost. They are compared in Table 8 below.

Table 8: Trade Study for Communication Link

	<b>Direct communication link with only the Outpost</b>	<b>Direct communication link with Ground Control &amp; the Outpost</b>
<b>System Complexity</b>	Relatively Simple control system	Complex control system
<b>Design Constraints</b>	Will not increase mass, and low in power consumption	Will significantly increase the mass and power consumption
<b>Operation Risk</b>	Will completely lose communication if disconnected from the Outpost	Backup communication with Ground System is available if disconnected from the Outpost

According to Table 8, having direct communication link with only the Outpost has a significant advantage in mass/power consumption, which matches the main drivers defined. Also, previous space robotic arms like Canadarm2 and European Robotic Arm (ERA) are both typically operated from the International Space Station (ISS) [15]. In addition, direct communication with the Ground Control might be impractical because of the time lag in command signals [16]. Hence, it has been decided that our system will contain a communications subsystem to communicate only with the Outpost.

## 9 Subsystem Requirements

### 9.1 Subsystem LM: Locomotion

#### Functional Requirements

- LM-F-01** The locomotion subsystem shall be able to move the robotic system.  
*(Derived from S-F-02, S-F-03, S-F-04)*  
*Rationale: Required for operation*  
*Verified by ground testing*
- LM-F-02** The locomotion subsystem shall be functional in a vacuum environment.  
*(Derived from S-E-01)*  
*Rationale: Required for operation*  
*Verified by ground testing*
- LM-F-03** The locomotion subsystem shall accept electrical power from the power supply subsystem. *(Derived from S-C-03, S-C-04)*  
*Rationale: subsystem needs power to operate*  
*Verified by ground testing*
- LM-F-04** The locomotion subsystem shall receive commands from the data handling subsystem. *(Derived from S-F-13, S-F-14)*  
*Rationale: required for control from ground control or Outpost*  
*Verified by ground testing*
- LM-F-05** The locomotion subsystem shall manipulate the velocities of joints with rates specified by received commands. *(Derived from S-F-02, S-F-04, S-F-05, LM-F-01)*  
*Rationale: required for operation*  
*Verified by ground testing*
- LM-F-06** The locomotion subsystem shall transmit data related to position and angle of the joints to the data handling subsystem. *(Derived from S-F-07)*  
*Rationale: data handling subsystem will process the data and send necessary information to the Outpost*  
*Verified by ground testing*

#### Performance Requirements

- LM-P-01** The locomotion subsystem shall have at least 6 Degrees of Freedom (DOF).  
*(Derived from S-F-02)*  
*Rationale: Derived from mechanical trade study*  
*(Verified by analysis of the subsystem design)*

- LM-P-02** The work envelope of the locomotion subsystem shall cover TBD % of the lunar Outpost. *(Derived from S-P-05)*  
*Rationale: Required for Operation*  
*(Verified by ground testing)*
- LM-P-03** The locomotion subsystem shall move at TBD m/s. *(Derived from LM-F-05)*  
*Rationale: Required for Operation*  
*(Verified by ground testing)*
- LM-P-04** The locomotion subsystem shall maintain mechanical integrity between -120°C to 180°C (TBC) [17]. *(Derived from S-E-02)*  
*Rationale: To ensure system operation in the operation temperature range*  
*(Verified by ground testing under temperature range)*
- LM-P-05** The locomotion subsystem shall have a mass less than 141.75 kg. *(Derived from S-C-01 and Mass Budget)*  
*Rationale: To ensure the mass satisfies the constraint requirement*  
*Verified by measuring weight of the subsystem*
- LM-P-06** The locomotion frame subsystem in undeployed state shall have volume less than TBD. *(Derived from S-F-01)*  
*Rationale: To ensure the system fits inside the transport vehicle*  
*(Verified by measuring dimensions of the subsystem)*
- LM-P-07** The subsystem shall be capable of withstanding vibrations up to 270 Hz (TBC) (Appendix A) during launch. *(Derived from S-E-04 and Load Calculation in the Appendix)*  
*Rationale: Vibration may damage the parts of the system*  
*Verified by ground testing*
- LM-P-08** The locomotion subsystem shall consume a maximum of 36 W of electrical power on average. *(Derived from S-C-03 and power budget)*  
*Rationale: required according to power budget*  
*Verified by ground testing*
- LM-P-09** The locomotion subsystem shall consume a maximum of 140 W of electrical power on peak. *(Derived from S-C-03 and power budget)*  
*Rationale: required according to power budget*  
*Verified by ground testing*
- LM-P-10** The locomotion subsystem shall send the data to data handling subsystem at rate of TBD kbps. *(Derived from LM-F-06)*

*Rationale: to ensure the subsystem and the Outpost receives sufficient amount of data in time*

*Verified by ground testing*

- LM-P-11** The locomotion subsystem shall send data to data handling subsystem with accuracy of TBD %. *(Derived from LM-F-06)*

*Rationale: to ensure system reliability*

*Verified by ground testing and data analysis*

- LM-P-12** The locomotion subsystem shall rotate the joints at a velocity up to 0.5 rad/s [17]. (TBC) *(Derived from LM-F-05)*

*Rationale: to ensure the system moves to target location in desired amount of time*

*Verified by ground testing*

- LM-P-13** The locomotion subsystem shall execute commands within TBD min of receiving command. *(Derived from LM-F-04, LM-F-05)*

*Rationale: required for system responsiveness*

*Verified by ground testing*

- LM-P-14** The drive amplifiers shall receive commands at frequency of 20 Hz. *(Appendix B) (Derived from LM-F-04 and Appendix)*

*Rationale: to ensure accuracy in movement of joints*

*Verified by ground testing*

- LM-P-15** The resolvers shall transmit data at frequency of 300 Hz. *(Appendix B) (Derived from LM-F-06 and Appendix)*

*Rationale: to ensure accuracy in movement of joints*

*Verified by ground testing*

## 9.2 Subsystem DH: Data Handling and Processing

### Functional Requirements

- DH-F-01** The data handling subsystem shall be operational in a vacuum environment. *(Derived from S-E-01)*

*Rationale: Required for operation*

*Verified by ground testing*

- DH-F-02** The locomotion subsystem shall accept electrical power from the power supply subsystem. *(Derived from S-C-03, S-C-04)*

*Rationale: subsystem needs power to operate*

*Verified by ground testing*



- DH-F-03** The data handling subsystem shall send commands to the other subsystems (LM, TC, PS, EE, SR). *(Derived from S-F-13, S-F-14)*  
*Rationale: required for subsystem operation*  
*Verified by ground testing*
- DH-F-04** The data handling subsystem shall receive data from the other subsystems (LM, TC, PS, EE, SR). *(Derived from S-F-07)*  
*Rationale: required to process data and relay the information to the Outpost*  
*Verified by ground testing*
- DH-F-05** The data handling subsystem shall send transmissions to the Outpost. *(Derived from S-F-07)*  
*Rationale: required for communication with the Outpost*  
*Verified by ground testing*
- DH-F-06** The data handling subsystem shall receive commands from the Outpost. *(Derived from S-F-13, S-F-14)*  
*Rationale: required for manual operation from the Outpost*  
*Verified by ground testing*
- DH-F-07** The data handling subsystem shall process the data and perform necessary mathematical computations. *(Derived from S-F-13, S-F-14)*  
*Rationale: the subsystem shall calculate amount of torque needed by joints to reach the target area, number and location of active heaters to keep desired subsystems at operational temperature range, and power needed by each subsystem during operation*  
*Verified by ground testing*
- DH-F-08** The data handling subsystem shall have storage for the received data and commands. *(Derived from S-F-07, S-C-06)*  
*Rationale: to ensure operation in case of shutdown or failure*  
*Verified by ground testing*
- DH-F-09** The data handling subsystem shall have redundant methods for sending and receiving data and commands. *(Derived from S-C-06)*  
*Rationale: adding a level of tolerance lowers system risk*  
*Verified by ground testing and design analysis*

## Performance Requirements

- DH-P-01** The data handling subsystem shall maintain mechanical integrity between -20°C to 65°C (TBC). *(Derived from S-E-02)*  
*Rationale: To ensure system operation in the operation temperature range*

- Verified by ground testing under temperature range*
- DH-P-02** The CPU processor of the data handling subsystem shall be operational between TBD°C to TBD°C. *(Derived from S-E-02)*  
*Rationale: To ensure system operation in the operation temperature range*  
*Verified by ground testing under temperature range*
- DH-P-03** The data handling subsystem shall weigh less than 15.75 kg. *(Derived from S-C-01 and Mass Budget)*  
*Rationale: To ensure the mass satisfies the constraint requirement*  
*Verified by measuring weight of the subsystem*
- DH-P-04** The data handling subsystem shall have volume less than TBD m<sup>3</sup>. *(Derived from S-F-01)*  
*Rationale: To ensure the system fits inside the transport vehicle*  
*Verified by measuring dimensions of the subsystem*
- DH-P-05** The data handling subsystem shall withstand vibrations up to 270 Hz (TBC) (Appendix A) at TBD dB during the launch. *(Derived from S-E-04 and Load Calculation in the Appendix)*  
*Rationale: Vibration may damage the parts of the system*  
*Verified by ground testing*
- DH-P-06** The data handling subsystem shall consume a maximum of 8 W of electrical power on average. *(Derived from S-C-03 and power budget)*  
*Rationale: required according to power budget*  
*Verified by ground testing*
- DH-P-07** The data handling subsystem shall consume a maximum of 13 W of electrical power during peak. *(Derived from S-C-03 and power budget)*  
*Rationale: required according to power budget*  
*Verified by ground testing*
- DH-P-08** The data handling subsystem shall transmit data to Outpost at the rate of TBD kbps. *(Derived from DH-F-05)*  
*Rationale: to ensure the Outpost receives sufficient amount of data in time*  
*Verified by ground testing*
- DH-P-09** The data handling subsystem shall send data to the Outpost with accuracy of TBD %. *(Derived from DH-F-05)*  
*Rationale: required for accurate communication with the Outpost*  
*Verified by ground testing*

- DH-P-10** The data handling subsystem shall have minimum processing speed of 133 MHz. (TBC) (*Derived from DH-F-07 and Trade Study for Processors*)  
*Rationale: to ensure the subsystem receives appropriate command in time*  
*Verified by ground testing*
- DH-P-11** The data handling subsystem shall check the data integrity of received commands and data. (*Derived from DH-F-07*)  
*Rationale: to ensure accurate data or command is received*  
*Verified by ground testing and data analysis*
- DH-P-12** The data handling subsystem shall have storage for TBD GB of data and commands. (*Derived from DH-F-08*)  
*Rationale: to store information for future operations*  
*Verified by ground testing and data analysis*
- DH-P-08** The data handling subsystem shall store TBD GB of data and commands for TBD days. (*Derived from DH-F-08, S-C-06*)  
*Rationale: to maintain the data in case of shutdown or failure*  
*Verified by ground testing and data analysis*
- DH-P-13** The data handling subsystem shall transmit commands or data to other subsystems and the Outpost at frequencies given in Appendix B.  
*(Derived from DH-F-05)*  
*Rationale: to ensure the data handling subsystem transmits commands or data to desired subsystem or the Outpost*  
*Verified by ground testing*

### 9.3 Subsystem TC: Thermal Control

#### Functional Requirements

- TC-F-01** The thermal control subsystem shall provide thermal protection to all subsystems during the entire mission. (*Derived from S-E-02*)  
*Rationale: Required for Operation*  
*(Verified by ground testing and lifetime simulation)*
- TC-F-02** The thermal control subsystem shall be operational in a vacuum environment. (*Derived from S-E-01*)  
*Rationale: Required for operation*  
*Verified by ground testing*
- TC-F-03** The thermal control subsystem shall accept electrical power from the power supply subsystem. (*Derived from S-C-03, S-C-04*)

*Rationale: subsystem needs power to operate*

*Verified by ground testing*

**TC-F-04** The thermal control subsystem shall receive commands from the data handling subsystem. *(Derived from S-F-14, S-F-15)*

*Rationale: required for control from ground control or Outpost*

*Verified by ground testing*

**TC-F-05** The thermal control subsystem shall transmit temperature data to the data handling subsystem. *(Derived from S-F-07)*

*Rationale: data handling subsystem will process the data and send necessary information to the Outpost*

*Verified by ground testing*

**TC-F-06** The thermal control subsystem shall measure temperature of sensitive subsystems (SR, DH, PS). *(Derived from S-E-02)*

*Rationale: measuring temperature of sensors, data handling, and power subsystem and estimating the temperature of the rest reduces power usage and number of sensors required on the system*

*Verified by ground testing and thermal analysis*

**TC-F-07** The thermal control subsystem shall adjust the temperature of the subsystems specified by received commands. *(Derived from S-F-14, S-F-15, S-E-02, TC-F-04)*

*Rationale: required for operation*

*Verified by ground testing*

## Performance Requirements

**TC-P-01** The thermal control subsystem shall maintain mechanical integrity between -70°C to 135°C (TBC). *(Derived from S-E-02)*

*Rationale: To ensure system operation in the operation temperature range (Verified by ground testing under temperature range)*

**TC-P-02** The thermal control subsystem shall have mass less than TBD kg. *(Derived from S-C-01 and Mass Budget)*

*Rationale: To ensure the mass satisfies the constraint requirement*

*Verified by measuring weight of the subsystem*

**TC-P-03** The thermal control subsystem shall have volume less than TBD m<sup>3</sup>. *(Derived from S-F-01)*

*Rationale: To ensure the system fits inside the transport vehicle (Verified by measuring dimensions of the subsystem)*

- TC-P-04** The thermal control subsystem shall withstand vibrations up to 270 Hz (TBC) during the launch. *(Derived from S-E-04 and Load Calculation in the Appendix)*  
*Rationale: Vibration may damage the parts of the system*  
*Verified by ground testing*
- TC-P-05** The thermal control subsystem shall maintain the temperatures of the subsystem at given ranges listed in Appendix C. *(Derived from TC-F-07)*  
*Rationale: to ensure the subsystem is at operational or survival temperature range*  
*Verified by ground testing under given temperature range*
- TC-P-06** The electronics of thermal control subsystem shall consume/dissipate a maximum of 140 W of electrical power on average. *(Derived from S-C-03)*  
*Rationale: required according to power budget*  
*Verified by ground testing*
- TC-P-07** The electronics of thermal control subsystem shall consume/dissipate a maximum of 140 W of electrical power on peak. *(Derived from S-C-04)*  
*Rationale: required according to power budget*  
*Verified by ground testing*
- TC-P-08** The thermal control subsystem shall change the temperature of a subsystem at rate of TBD °C/s. *(Derived from TC-F-07)*  
*Rationale: to adjust the temperature of subsystem within time for operation*  
*Verified by ground testing under given temperature range*
- TC-P-09** The thermal control subsystem shall measure temperatures of the subsystems from -90°C to 200°C. (TBC) *(Derived from TC-F-06 and Operational and Temperature Ranges from Appendix C)*  
*Rationale: required for subsystem operation*  
*Verified by ground testing under given temperature range*
- TC-P-10** The thermal control subsystem shall measure temperatures of the subsystems with accuracy of 1°C [18]. (TBC) *(Derived from TC-F-06)*  
*Rationale: to ensure system reliability*  
*Verified by ground testing and data analysis*
- TC-P-11** The thermal control subsystem shall measure temperatures of the subsystem at rate of TBD Hz. *(Derived from TC-F-06)*  
*Rationale: to detect temperature change in the system*

- Verified by ground testing and data analysis*
- TC-P-12** The thermal control subsystem shall transmit temperature data to data handling subsystem at rate of TBD kbps. *Derived from TC-F-05)*  
*Rationale: to ensure the subsystem and the Outpost receives sufficient amount of data in time*  
*Verified by ground testing*
- TC-P-13** The thermal control subsystem shall transmit temperature data to data handling subsystem with accuracy of 1°C [18]. (TBC) *(Derived from TC-F-05)*  
*Rationale: to ensure system reliability*  
*Verified by ground testing and data analysis*
- TC-P-14** The thermal control subsystem shall execute commands within TBD min of receiving command. *(Derived from TC-F-07)*  
*Rationale: required for system responsiveness*  
*Verified by ground testing*
- TC-P-15** The thermal control subsystem shall receive commands at a frequency of 35 Hz. *(Appendix B) (Derived from TC-F-05)*  
*Rationale: to ensure temperature is maintained accurately*  
*Verified by ground testing*
- TC-P-16** The thermal control subsystem shall transmit data at frequency of 35 Hz. *(Appendix B) (Derived from TC-F-05)*  
*Rationale: to ensure temperature is maintained accurately*  
*Verified by ground testing*

## 9.4 Subsystem PS: Power Supply

### Functional Requirements

- PS-F-01** The power subsystem shall secure all cables and distribution networks to the other subsystems. *(Derived from S-E-01, S-E-05, S-E-08)*  
*Rationale: required for operation*  
*Verified by analysis of the subsystem design*
- PS-F-02** The power subsystem shall be operational in a vacuum environment. *(Derived from S-E-01)*  
*Rationale: Required for operation*  
*Verified by ground testing*
- PS-F-03** The power subsystem shall mitigate potential power surges. *(Derived from S-C-03, S-C-04)*

*Rationale: to ensure system reliability*

*Verified by ground testing*

- PS-F-04** The power subsystem shall supply uninterrupted power to all subsystems that require electric power. *(Derived from S-C-03, S-C-04)*

*Rationale: to ensure continuous operation of the system*

*Verified by ground testing*

- PS-F-05** The power subsystem shall transmit power usage data to the data handling subsystem. *(Derived from S-F-07)*

*Rationale: data handling subsystem will process the data and send necessary information to the Outpost*

*Verified by ground testing*

- PS-F-06** The power subsystem shall supply voltage to subsystems based on required voltages of each subsystem. *(Derived from S-C-04, S-C-05)*

*Rationale: required for operation*

*Verified by ground testing*

- PS-F-07** The power subsystem shall have redundant methods for distributing power. *(Derived from S-C-06)*

*Rationale: adding a level of tolerance lowers system risk*

*Verified by ground testing and design analysis*

## **Performance Requirements**

- PS-P-01** The power subsystem shall convert power to specific voltages (TBD) with accuracy of 1 V. (TBC for sensors, refer to Appendix D)

*Rationale: required for subsystem operation and ensure system reliability*

*Verified by ground testing and voltage analysis*

- PS-P-02** The power subsystem shall transmit data to data handling subsystem at rate of TBD kbps. *(Derived from PS-F-05)*

*Rationale: to ensure the subsystem and the Outpost receives sufficient amount of data in time*

*Verified by ground testing*

- PS-P-03** The power subsystem shall transmit data to data handling subsystem with accuracy of TBD %. *(Derived from PS-F-05)*

*Rationale: to ensure system reliability*

*Verified by ground testing and data analysis*

- PS-P-04** The power subsystem shall provide output voltages to each component to within  $\pm$  TBD V. *(Derived from PS-F-01)*

*Rationale: to ensure each component receives correct voltage*

*Verified by ground testing and power analysis*

- PS-P-05** The power subsystem shall execute commands within TBD min of receiving command. *(Derived from PS-F-06)*

*Rationale: required for system responsiveness*

*Verified by ground testing*

- PS-P-06** The power subsystem shall transmit data at frequency of TBD Hz. *(Derived from PS-F-05)*

*Rationale: to ensure the data handling subsystem correctly identifies the source of transmission*

*Verified by ground testing*

## 9.5 Subsystem EE: End Effector

### Functional Requirements

- EE-F-01** The end effector subsystem shall be able to attach to astronauts for EVA. *(Derived from S-F-05, S-F-09)*

*Rationale: Required for Operation*

*Verified by ground testing*

- EE-F-02** The end effector subsystem shall be able to capture visiting vehicles and payloads. *(Derived from S-F-09)*

*Rationale: Required for Operation*

*Verified by ground testing*

- EE-F-03** The end effector subsystem shall be able to detach faulty components. *(Derived from S-F-06)*

*Rationale: Required for Operation*

*Verified by ground testing*

- EE-F-04** The end effector subsystem shall be operational in a vacuum environment. *(Derived from S-E-01)*

*Rationale: Required for operation*

*Verified by ground testing*

- EE-F-05** The end effector subsystem shall accept electrical power from the power supply subsystem. *(Derived from S-C-03, S-C-04)*

*Rationale: subsystem needs power to operate*

*Verified by ground testing*

- EE-F-06** The end effector subsystem shall receive commands from the data handling subsystem. *(Derived from S-F-13, S-F-14)*

*Rationale: required for control from ground control or Outpost*



*Verified by ground testing*

- EE-F-07** The end effector subsystem shall manipulate the position of the end effector from the received commands. (*Derived from EE-F-01, EE-F-02, EE-F-03, EE-F-06*)

*Rationale: required for operation*

*Verified by ground testing*

- EE-F-08** The end effector subsystem shall send data related to the end effectors to the data handling subsystem. (*Derived from S-F-07*)

*Rationale: data handling subsystem will process the data and send necessary information to the Outpost*

*Verified by ground testing*

## Performance Requirements

- EE-P-01** The end effector subsystem shall manipulate payloads of up to 10000 kg (TBC). (*Derived from S-P-01*)

*Rationale: required for operation*

*Verified by ground testing*

- EE-P-02** The end effector subsystem shall apply holding or reaction forces of 200 N in any direction. (*Derived from S-P-02*)

*Rationale: required for operation*

*Verified by ground testing*

- EE-P-03** The end effector subsystem shall accommodate for 0 m to 0.1 m (TBC) of linear misalignment in axial direction [9]. (*Derived from EE-F-07*)

*Rationale: To ensure system accuracy*

*Verified by ground testing and analysis of the subsystem*

- EE-P-04** The end effector subsystem shall accommodate for 0.1 m (TBC) of linear misalignment in radial direction [9]. (*Derived from EE-F-07*)

*Rationale: To ensure system accuracy*

*Verified by ground testing and analysis of the subsystem design*

- EE-P-05** The end effector subsystem shall accommodate for 10° (TBC) roll of angular misalignment [9]. (*Derived from EE-F-07*)

*Rationale: To ensure system accuracy*

*Verified by ground testing and analysis of the subsystem design*

- EE-P-06** The end effector subsystem shall accommodate for 15° (TBC) pitch and yaw of angular misalignment [9]. (*Derived from EE-F-07*)

*Rationale: To ensure system accuracy*

*Verified by ground testing and analysis of the subsystem design*

- EE-P-07** The end effector subsystem shall maintain mechanical integrity between -70°C to 180°C(TBC). *(Derived from S-E-02)*  
*Rationale: To ensure system operation in the operation temperature range*  
*Verified by ground testing under temperature range*
- EE-P-08** The end effector subsystem shall have mass less than TBD kg. *(Derived from S-C-01 and Mass Budget)*  
*Rationale: To ensure the mass satisfies the constraint requirement*  
*Verified by measuring weight of the subsystem*
- EE-P-09** The end effector subsystem shall have volume less than TBD m<sup>3</sup>.  
*(Derived from S-F-01)*  
*Rationale: To ensure the system fits inside the transport vehicle*  
*Verified by measuring dimensions of the subsystem*
- EE-P-10** The end effector subsystem shall withstand vibrations up to 270 Hz (TBC) (Appendix A) at TBD dB during the launch. *(Derived from S-E-04 and Load Calculation in the Appendix)*  
*Rationale: Vibration may damage the parts of the system*  
*Verified by ground testing*
- EE-P-11** The end effector subsystem shall consume a maximum of 15.4 W of electrical power on average. *(Derived from S-C-03 and power budget)*  
*Rationale: required according to power budget*  
*Verified by ground testing*
- EE-P-12** The end effector subsystem shall consume a maximum of 100 W of electrical power on peak. *(Derived from S-C-03 and power budget)*  
*Rationale: required according to power budget*  
*Verified by ground testing*
- EE-P-13** The end effector subsystem shall send the data to data handling subsystem at rate of TBD kbps. *(Derived from EE-F-08)*  
*Rationale: to ensure the Outpost receives sufficient amount of data in time*  
*Verified by ground testing*
- EE-P-14** The end effector subsystem shall send data to data handling subsystem with accuracy of 1°. *(Derived from EE-F-08)*  
*Rationale: required for accurate communication with the Outpost*  
*Verified by ground testing*

## 9.6 Subsystem SR: Sensors

### Functional Requirements

- SR-F-01** The sensors subsystem shall be operational in a vacuum environment.  
*(Derived from S-E-01)*  
*Rationale: Required for operation*  
*Verified by ground testing*
- SR-F-02** The sensors subsystem shall accept electrical power from the power supply subsystem. *(Derived from S-C-03, S-C-04)*  
*Rationale: subsystem needs power to operate*  
*Verified by ground testing*
- SR-F-03** The sensors subsystem shall receive commands from the data handling subsystem. *(Derived from S-F-14, S-F-15)*  
*Rationale: required for control from ground control or the Outpost*  
*Verified by ground testing*
- SR-F-04** The sensors subsystem shall send the graphic data to the data handling subsystem. *(Derived from S-F-07)*  
*Rationale: data handling subsystem will process the data and send necessary information to the Outpost*  
*Verified by ground testing*
- SR-F-05** The sensors subsystem shall search for physical damage on the surface of the outpost. *(Derived from S-F-04)*  
*Rationale: required for operation*  
*Verified by ground testing and simulation*

### Performance Requirements

- SR-P-01** The sensor subsystem shall maintain mechanical integrity between -20°C to 65°C (TBC). *(Derived from S-E-02 and Appendix)*  
*Rationale: To ensure system operation in the operation temperature range*  
*Verified by ground testing under temperature range*
- SR-P-02** The sensor subsystem shall have mass less than TBD kg. *(Derived from S-C-01 and Mass Budget)*  
*Rationale: To ensure the mass satisfies the constraint requirement*  
*Verified by measuring weight of the subsystem*
- SR-P-03** The sensor subsystem shall have volume less than TBD m<sup>3</sup>. *(Derived from S-F-01)*  
*Rationale: To ensure the system fits inside the transport vehicle*  
*Verified by measuring dimensions of the subsystem*

- SR-P-04** The sensor subsystem shall withstand vibrations up to 270 Hz (TBC) at TBD dB during the launch. *(Derived from S-E-04 and Load Calculation in the Appendix)*  
*Rationale: Vibration may damage the parts of the system*  
*Verified by ground testing*
- SR-P-05** The sensors subsystem shall consume a maximum of 52.5 W of electrical power on average. *(Derived from S-C-03 and power budget)*  
*Rationale: required according to power budget*  
*Verified by ground testing*
- SR-P-06** The sensors subsystem shall consume a maximum of 60 W of electrical power on peak. *(Derived from S-C-03 and power budget)*  
*Rationale: required according to power budget*  
*Verified by ground testing*
- SR-P-07** The sensors subsystem shall send the data to data handling subsystem at rate of TBD kbps. *(Derived from SR-F-02)*  
*Rationale: to ensure the subsystem and the Outpost receives sufficient amount of data in time*  
*Verified by ground testing*
- SR-P-08** The sensors subsystem shall send data to data handling subsystem with accuracy of TBD %. *(Derived from SR-F-02)*  
*Rationale: to ensure system reliability*  
*Verified by ground testing and data analysis*
- SR-P-09** The sensors subsystem shall perform TBD full scans per day. *(Derived from SF-F-03)*  
*Rationale: to detect changes on the surface of the Outpost*  
*Verified by ground testing and data analysis*
- SR-P-10** The sensors subsystem shall detect physical damage with size larger than TBD mm on the surface of the Outpost. *(Derived from SF-F-03)*  
*Rationale: required for operation*  
*Verified by ground testing and simulation*
- SR-P-11** The sensors subsystem shall detect location of physical damage on the Outpost within TBD cm. *(Derived from SF-F-03)*  
*Rationale: required for operation*  
*Verified by ground testing and simulation*
- SR-P-12** The sensors subsystem shall receive commands at frequencies given in Appendix B. *(Derived from SR-F-01)*

*Rationale: to ensure accuracy in measurement of required data*  
*Verified by ground testing*

**SR-P-13** The sensors subsystem shall transmit data at frequencies given in Appendix B. *(Derived from SR-F-02)*

*Rationale: to ensure accuracy in measurement of required data*  
*Verified by ground testing*

## 9.7 Subsystem FR: Frame

### Functional Requirements

**FR-F-01** The frame subsystem shall provide supporting structure to the robotic system. *(Derived from S-E-01, S-E-05, S-E-08)*

*Rationale: required for operation*  
*Verified by ground testing*

**FR-F-02** The frame subsystem shall protect the inner components from physical environmental hazards. *(Derived from S-E-01, S-E-05, S-E-08)*

*Rationale: required for operation*  
*Verified by ground testing*

**FR-F-03** The frame subsystem shall be operational in a vacuum environment. *(Derived from S-E-01)*

*Rationale: Required for operation*  
*Verified by ground testing*

**FR-F-04** The frame subsystem shall house the all subsystems and cables and distribution channels that connect to the subsystems. *(Derived from FR-F-01)*

*Rationale: to ensure all subsystems are placed in the system and connected accordingly*  
*Verified by design inspection*

### Performance Requirements

**FR-P-01** The frame subsystem shall maintain mechanical integrity between -70°C to 180°C(TBC). *(Derived from S-E-02 and Appendix)*

*Rationale: To ensure system operation in the operation temperature range*  
*Verified by ground testing under temperature range*

**FR-P-02** The frame subsystem shall have mass less than TBD kg. *(Derived from S-C-01 and Mass Budget)*

*Rationale: To ensure the mass satisfies the constraint requirement*  
*Verified by measuring weight of the subsystem*

- FR-P-03** The frame subsystem shall have volume less than TBD m<sup>3</sup>. (*Derived from S-F-01*)  
*Rationale: To ensure the system fits inside the transport vehicle*  
*Verified by measuring dimensions of the subsystem*
- FR-P-04** The frame subsystem shall withstand vibrations up to 270 Hz (TBC) (Appendix A) during the launch. (*Derived from S-E-04 and Load Calculation in the Appendix*)  
*Rationale: Vibration may damage the parts of the system*  
*Verified by ground testing*
- FR-P-05** The frame subsystem shall prevent other subsystems from displacing more than TBD cm due to vibration during the launch. (*Derived from FR-P-04*)  
*Rationale: To ensure system reliability*  
*Verified by ground testing under specific frequency*
- FR-P-06** The frame subsystem shall have minimum yield safety factor of 1.1 (TBC). (*Derived from FR-F-02, FR-F-03, and the Appendix*)  
*Rationale: To ensure system reliability*  
*Verified by load testing*
- FR-P-07** The frame subsystem shall be minimum ultimate safety factor of 1.5 (TBC). (*Derived from FR-F-02, FR-F-03, and the Appendix*)  
*(Derived from FR-F-02, FR-F-03, and the Appendix)*  
*(Verified by load testing)*

## 10 Trade Studies

### 10.1 Mechanical Trade Studies

### 10.2 Mechanical Trade Studies

#### 10.2.1 Architecture

To perform operations such as Outpost reconfiguration, and capturing and berthing of free flyer, the robotic system needs to have wide workspace range. The arm design that was used for Canadarm and Canadarm2 is capable of these operations. Using this design as reference, three alternative architectures are proposed.

#### 1. 4 DOF robotic arm with 4 booms and 3 end effector

The first design has 14 joints as shown in Figure 9 below. The two booms at the bottom act as legs to maneuver around the Outpost. The end effectors connected to each legs can grapple to the Outpost and to the free flyer vehicles. There is a smaller arm connects to the elbow joints of the legs, which has 7 DOF to perform inspection, maintenance and repair of the Outpost.

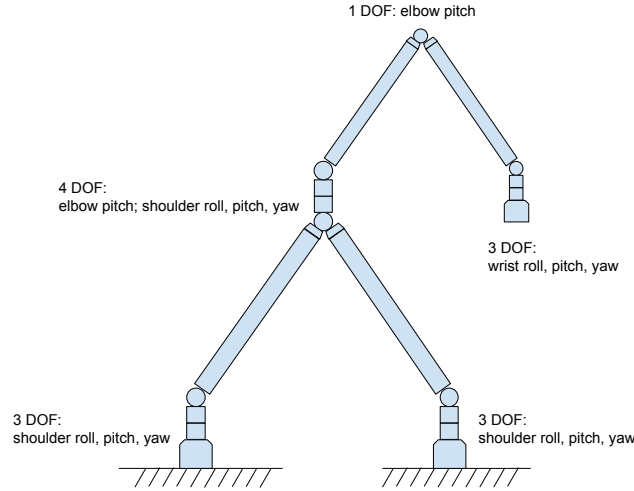


Figure 9: Sketch of 14DOF arm

## 2. 7 DOF robotic arm with 2 telescopic booms and 2 end effectors

This architecture has two telescopic booms that would be extended once the robotic system is unstowed. The telescopic booms are extended by first connecting both end effectors on the Outpost and allowing the shoulder joint to freely rotate. Then, the elbow joint will rotate and extend the telescopic boom and two booms will extend separately.

The end effectors can grapple to Outpost to perform Outpost reconfiguration as well as free flying vehicles for capture and berthing. The end effectors can also connect to tools that are used for Outpost inspection and maintenance. The sketch of the architecture is shown in Figure 10 below.

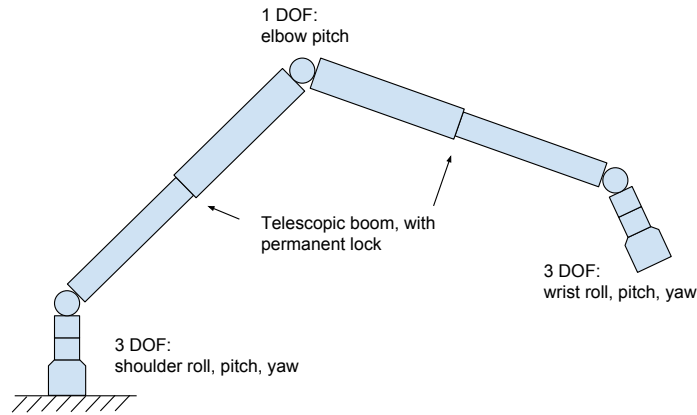


Figure 10: Sketch of 7DOF arm

### 3. 14 DOF robotic arm with truss rail, 2 booms and 2 end effectors

As shown in Figure 11 below, this design is composed of two parts. The first part is a 8 DOF arm with a truss rail and two booms. The end effectors can grapple to the Outpost to maneuver the robotic arm around the Outpost and perform Outpost reconfiguration. The end effectors can also grapple to free flying vehicles for capture and berthing operations. For inspection, maintenance and repair operations, two end effectors will be fixed on the Outpost and the truss rail between two elbow joints will act as guides for the fine arm.

The fine arm has 6 DOF and can move on the truss rail to perform inspection, maintenance and repair operations. Different tools can be attached to the end of the fine arm for specific tasks.

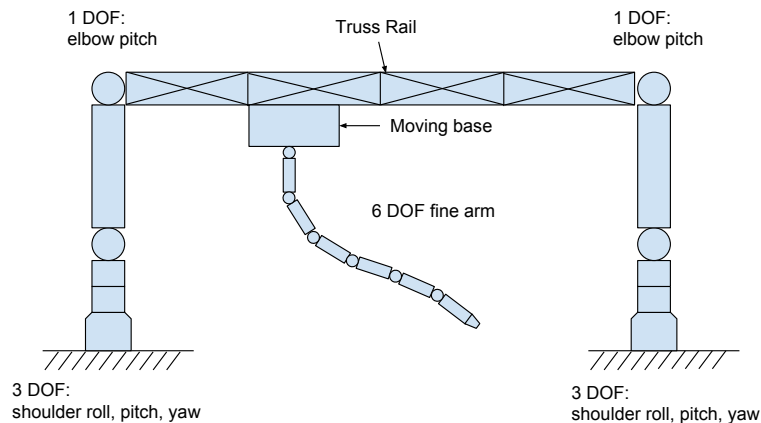


Figure 11: Sketch of 14DOF arm with truss



Table 9: Trade Study of Architecture

	Architecture #1	Architecture #2	Architecture #3
<b>Structure Stability</b>	Robot has two fixed points on the Outpost, providing more stability	Robot has only one point fixed to the Outpost, arm will vibrate easily	Robot has two fixed points on the Outpost, providing more stability
<b>System Complexity</b>	High complexity due to 14 degrees of freedom [Fund Robo]	Lower complexity due to less degrees of freedom, heritage from Canadarm2	High complexity due to 14 degrees of freedom [Fund Robo]
<b>Mass Required</b>	Heaviest out of three due to 14 joints in total [That ERA thing]	Lightest out of three Least number of joints	Medium: Has 8 joints and mechanical parts related to fine arm
<b>Volume Occupied</b>	Large volume due to more booms in the system	Least volume out of three: 2 telescopic booms that are retracted in launch position	Large volume due to addition of truss and a fine arm
<b>System Range</b>	Short range due to relatively shorter boom	Long range due to telescopic boom that will extend	Short range due to relatively shorter boom
<b>Dexterous Tasks</b>	High stability due to smaller dexterous arm	System can attach to tool for dexterous task Low stability	System has small dexterous arm High stability

### 10.2.2 Material of Frame

### 10.2.3 End Effector

In order to interact with the external subsystems situated around EML2, including the Outpost, astronauts and other modules during various operations, an end effector subsystem is required to build connections with the Outpost and other modules. And the interface established by the end effector shall capable of providing power and data connections to and from the robotic system.

As a result of those criteria, two potential end effector models are listed and compared below:

**Three fingers-three petals End Effector:** There are two main subassemblies of this end effector: an active mechanism, which consists of a motor driven lead screw that would accurate the linkages between the three finger and three petals; a passive structure, whose geometry will allow it to be constrained by the linkages and therefore establishing a rigid interface.

**Steel cable-snared End Effector:** This end effector system consists of the snaring and rigidizing subassembly inside the shell, and four latch/umbilical subassemblies outside the shell, which are responsible for the rigidizing loop and the connecting loop after the fine positioning for latching and connecting operation is reached.

Table 10: Trade Study for type of End Effector

	<b>Three fingers-three petals End Effector</b>	<b>Steel cable-snared End Effector</b>
<b>System Complexity</b>	Two main subassemblies Can accomplish capturing, rigidizing and connection by only one actuator. [19]	Two main subassemblies An orbit replaceable unit, end effector can be easily replaced or repaired on orbit [19]
<b>Operation Accuracy</b>	Capable of misalignment tolerance Not suitable for soft capture [19]	Has a strong capability of misalignment tolerance Has enormous capability of soft capture [19]
<b>Mass Required</b>	Maximum 50 kg [20]	Maximum 50 kg [20]
<b>Volume Occupied</b>	Relatively large: maximum circumradius 350 mm to 500 mm [19][20]	Small: maximum circumradius 280 mm [19]
<b>Power Required</b>	Low, only one actuator required [19]	Low, maximum 100 W [21]
<b>Maximum Payload</b>	Relatively small [20]	Large at a low speed [21]

According to this comparison, the second design - Steel cable-snared End Effector is more suitable for our project. And in addition to those advantages listed, the Steel cable-snared End Effector is a proven technology, which has been applied on existing projects like the European Robotic Arm (ERA).

#### 10.2.4 Locomotion - Motor type

#### 10.2.5 Locomotion - Joint type

As a major part of the locomotion subsystem, the joints utilize rotation of the motors to accomplish the motion of robotic arm. Two different joint structures that used in reference designs are inline joint and offset joint. Inline joint is used in European Robotic Arm and offset joint is used in Canadarm2. Depend on the tasks that two arms need to perform, both joint structures have advantages and disadvantages.

Table 11: Trade Study for type of Joint

	Inline Joint	Offset Joint
<b>Operation Complexity</b>	No joint collision risk, components are in the same plane.	Add complexity to task due to possibility of joint collision [comp]
<b>Operation Range</b>	Limited mobility; limited motor rotational range.	The arm can maneuver more readily over large areas by stepping over the elbow; large motor rotational range[comp]

The major task for Canadarm2 was to assemble the ISS. By having offset joints, the joint can rotate in larger range and enable the arm to have more flexible motion. Table 17 in Appendix E shows the joint motion range for Canadarm2 and ERA [22]. As the robotic system on the Outpost needs to perform reconfiguration operation, it is important to have large range of motion to maneuver the Outpost module. Therefore the offset joint structure is chosen for the locomotion subsystem.

### **10.3 Electrical Trade Studies**

#### **10.3.1 Power Storage**

### **10.4 Type of Thermal Control System**

#### **10.4.1 Type of Network Topology**

#### **10.4.2 Type of Data Communication System - Wired vs. Wireless**

#### **10.4.3 Type of Redundancy in System**

### **10.5 Controls Trade Studies**

### **10.6 Control Trade Studies**

## **11 System Architecture**

### **11.1 Mechanical Architecture**

### **11.2 Electrical Architecture**

### **11.3 Control Architecture**

## **12 Detailed Design**

### **12.1 Mechanical Design**

### **12.2 Electrical Design**

### **12.3 Control Design**

## **13 Budget**

### **13.1 Mass Budget**

Mass budget comes here

### **13.2 Power Budget**

#### **13.2.1 Average Power Budget**

Average Power Budget

#### **13.2.2 Peak Power Budget**

Peak Power Budget

## 14 Conclusion



## References

- [1] MacDonald Dettwiler and Associates. Canada's Next Generation Robotics - Request for Proposal, 2015.
- [2] Leonard David. NASA Mulls Deep-Space Station on Moon's Far Side. <http://www.space.com/17856-nasa-deep-space-station-moon-farside.html>, 2012. Accessed: 2015/12/05.
- [3] Brand N. Griffin David Smitherman. Habitat Concepts for Deep Space Exploration. <http://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/20140012883.pdf>, 2014. Accessed: 2015/12/05.
- [4] F. Kabanza P. Bellefeuille C. Langley, A. Allen. Toward Autonomy for Deep-Space Infrastructure. [http://robotics.estec.esa.int/i-SAIRAS/isairas2014/Data/Session%2010c/ISAIRAS\\_FinalPaper\\_0042.pdf](http://robotics.estec.esa.int/i-SAIRAS/isairas2014/Data/Session%2010c/ISAIRAS_FinalPaper_0042.pdf), 2014. Accessed: 2015/12/05.
- [5] United Nations. Treaty on Principles Governing the Activities of States in the Exploration and Use of Outer Space, including the Moon and Other Celestial Bodies. [http://www.unoosa.org/pdf/gares/ARES\\_21\\_2222E.pdf](http://www.unoosa.org/pdf/gares/ARES_21_2222E.pdf), 1966.
- [6] NASA. International Docking System Standard (IDSS) Interface Definition Document (IDD). [http://www.nasa.gov/pdf/490477main\\_idss\\_idd\\_rev101810%200924.pdf](http://www.nasa.gov/pdf/490477main_idss_idd_rev101810%200924.pdf), 2010.
- [7] Federal Aviation Administration. The Space Environment. [https://www.faa.gov/other\\_visit/aviation\\_industry/designees\\_delegations/designee\\_types/ame/media/Section%20III.4.1.2%20The%20Space%20Environment.pdf](https://www.faa.gov/other_visit/aviation_industry/designees_delegations/designee_types/ame/media/Section%20III.4.1.2%20The%20Space%20Environment.pdf). Accessed: 2015/09/22.
- [8] R. L. Korotev. METEORITE OR METEORWRONG? - density and specific gravity. <http://meteorites.wustl.edu/id/density.htm>. Accessed: 2015/09/22.
- [9] R. Kumar and R. Hayes. System Requirements and Design Features of Space Station Remote Manipulator System Mechanics. <http://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/19910015291.pdf>.
- [10] Federal Aviation Administration. The Space Environment. [https://www.faa.gov/other\\_visit/aviation\\_industry/designees\\_delegations/designee\\_types/ame/media/Section%20III.4.1.2%20The%20Space%20Environment.pdf](https://www.faa.gov/other_visit/aviation_industry/designees_delegations/designee_types/ame/media/Section%20III.4.1.2%20The%20Space%20Environment.pdf).

- [11] MarkW. Maimone Jeffrey J. Biesiadecki, P. Chris Leger. Tradeoffs Between Directed and Autonomous Driving on the Mar Exploration Rovers. [https://www-robotics.jpl.nasa.gov/publications/Mark\\_Maimone/tradeoffs\\_ijrr\\_07.pdf](https://www-robotics.jpl.nasa.gov/publications/Mark_Maimone/tradeoffs_ijrr_07.pdf), 2007. Accessed: 2015/12/05.
- [12] David G. Gilmore. *Spacecraft Thermal Control Handbook, Volume I: Fundamental Technologies*. Aerospace Corp, 2002.
- [13] *GOES I-M DataBook*. Space Systems Loral, 1996.
- [14] Arthur Smith. The Case For Space Based Solar Power Development. <http://www.spacedaily.com/news/ssp-03b.html>, 2003. Accessed: 2015/12/05.
- [15] Tommaso Sgobba Gary E. Musgrave Ph.D, Axel Larsen. *Safety Design for Space Systems*. Elsevier Science, 2009.
- [16] Jr. F. Moring. Robotic Servicing Seen As Beneficial For Human Exploration. <http://aviationweek.com/awin/robotic-servicing-seen-beneficial-human-exploration>.
- [17] D. Verhoeven. Space Mechanisms and Tribology for the Joints of the European Robot Arm (ERA). <http://www.esmats.eu/esmatspapers/pastpapers/pdfs/1999/verhoeven.pdf>.
- [18] W. Kester, J. Bryant and W. Jung. Temperature Sensors. [http://www.analog.com/media/cn/training-seminars/design-handbooks/temperature\\_sensors\\_chapter7.pdf](http://www.analog.com/media/cn/training-seminars/design-handbooks/temperature_sensors_chapter7.pdf). Accessed: 2015/11/22.
- [19] F. Feng, Y. W. Liu, H. Liu and H. G. Cai. Design schemes and comparison research of the end-effector of large space manipulator. *Chinese Journal of Mechanical Engineering*, 25:674–687, 2012.
- [20] S. Stamm and P. Motaghedi. Orbital Express Capture System: concept to reality. [https://www.google.ca/url?sa=t&rct=j&q=&esrc=s&source=web&cd=2&cad=rja&uact=8&ved=0CCMQFjABahUKEwjnhY04\\_-PIAhUJOD4KHeHDA6w&url=http%3A%2F%2Fproceedings.spiedigitallibrary.org%2Fdata%2FConferences%2FSPIEP%2F23638%2F78\\_1.pdf&usg=AFQjCNF9IRxuXLLgWgLNJ6nhpsV8A0lW1g&sig2=28L88GvkGFYKDdwUMC28rw](https://www.google.ca/url?sa=t&rct=j&q=&esrc=s&source=web&cd=2&cad=rja&uact=8&ved=0CCMQFjABahUKEwjnhY04_-PIAhUJOD4KHeHDA6w&url=http%3A%2F%2Fproceedings.spiedigitallibrary.org%2Fdata%2FConferences%2FSPIEP%2F23638%2F78_1.pdf&usg=AFQjCNF9IRxuXLLgWgLNJ6nhpsV8A0lW1g&sig2=28L88GvkGFYKDdwUMC28rw). Accessed: 2015/10/25.
- [21] C. J. M. Heemskerk, M. Visser and D. Vrancken. <http://robotics.estec.esa.int/ASTRA/Astra2006/Papers/ASTRA2006-3.1.2.05.pdf>.

- <http://robotics.estec.esa.int/ASTRA/Astra2006/Papers/ASTRA2006-3.1.2.05.pdf>, 2006. Accessed: 2015/10/25.
- [22] P. Laryssa, E. Lindsay, O. Layi, O. Marius, K. Nara, L. Aris and T. Ed. International Space Station Robotics: A Comparative Study of ERA, JEMRMS and MSS. In *7th ESA Workshop on Advanced Space Technologies for Robotics and Automation 'ASTRA 2002' ESTEC*, 2002.
- [23] National Aeronautics and Space Administration. International Space Station: Harmony. [http://www.nasa.gov/mission\\_pages/station/structure/elements/node2.html#.VjP1L7erRD-](http://www.nasa.gov/mission_pages/station/structure/elements/node2.html#.VjP1L7erRD-). Accessed: 2015/10/30.
- [24] United Launch Alliance. Delta IV Launch Services Users Guide. [http://www.ulalaunch.com/uploads/docs/Launch\\_Vehicles/Delta\\_IV\\_Users\\_Guide\\_June\\_2013.pdf](http://www.ulalaunch.com/uploads/docs/Launch_Vehicles/Delta_IV_Users_Guide_June_2013.pdf), 2013. Accessed: 2015/10/28.
- [25] United Launch Alliance. Atlas V Launch Services Users Guide. <http://www.ulalaunch.com/uploads/docs/AtlasVUsersGuide2010.pdf>, 2010. Accessed: 2015/10/28.
- [26] J. F. T. Bos and R. A. Bosman. Control of the joint runaway hazard for the European Robotic Arm. [http://s3.amazonaws.com/zanran\\_storage/www.nlr.nl/ContentPages/18804953.pdf](http://s3.amazonaws.com/zanran_storage/www.nlr.nl/ContentPages/18804953.pdf), 1998. Accessed: 2015/11/22.
- [27] Malin Space Science Systems. ECAM-C30. <http://www.msss.com/brochures/c30.pdf>, 2013. Accessed: 2015/11/22.
- [28] R. Blaser. High Resolution Standard Proximity Sensor . <http://www.vibro-meter.com/pdf/hrsp-s-info.pdf>. Accessed: 2015/11/22.
- [29] ATI Industrial Automation. Capacitive 6-Axis Force Sensor: Installation and Operation Manual. [http://www.ati-ia.com/app\\_content/Documents/9610-05-Capacitive%206-Axis%20Force%20Sensor.pdf](http://www.ati-ia.com/app_content/Documents/9610-05-Capacitive%206-Axis%20Force%20Sensor.pdf). Accessed: 2015/11/22.
- [30] Honeywell. TMS 9000 Rotary Torque Measurement System. [https://stevenengineering.com/tech\\_support/PDFs/31TORQUE.pdf](https://stevenengineering.com/tech_support/PDFs/31TORQUE.pdf). Accessed: 2015/11/22.
- [31] F. Fusco and R. Gallerini. European Robotic Arm: The Problem of Preventing Collisions. <http://robotics.estec.esa.int/ASTRA/Astra2000/Papers/2.1-1.pdf>. Accessed: 2015/11/22.
- [32] A. R. Seebass, S. B. Skaar and C. F. Ruoff. *Teleoperation and Robotics in Space*, volume 161. American Institute of Aeronautics and Astronautics.

- [33] J. E. Keese. Spacecraft Thermal Control Systems. <http://ocw.mit.edu/courses/aeronautics-and-astronautics/16-851-satellite-engineering-fall-2003/lecture-notes/123thermalcontro.pdf>.
- [34] A.H. Mishkin and B.M. Jau. Space-Based Multifunctional End Effector Systems. <http://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/19890001866.pdf>.
- [35] H. Seraji W. S. Kim K. Tso S. Hayati, J. Balaram and V. Prasad. Remote Surface Inspection System. <http://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/19930022910.pdf>.

## A Load Calculations

At EML2, the gravitational acceleration is nearly zero, the force acting on the arm is coming from external contact like EVA or the acceleration of payload.

### Payload reaction force/torque

There is no moving speed and stopping distance requirement proposed by customer. However, we can use the performance of reference design such as Canadarm and Canadarm2 to calculate a reference loading requirement.

Tip velocity of Canadarm with full payload:  $v = 0.06 \text{ m/s}$

Canadarm stopping distance with full payload:  $b = 0.6 \text{ m}$

Leaving a 30% margin, Stopping Distance:  $b = 0.42 \text{ m}$

Maximum payload mass from RFP:  $m = 10\,000 \text{ kg}$

Assume payload acceleration is constant, the following two equations are used to calculate acceleration:

$$b = v_i t + \frac{1}{2} a t^2 \quad (1)$$

$$a = \frac{v_f - v_i}{t} \quad (2)$$

where:

$v_i = v$  is the initial velocity of payload

$v_f = 0$  is the final velocity of payload

This gives us a result of

$$t = 14 \text{ s}, a = 0.0043 \text{ m/s}^2$$

The reaction force applied by the payload is

$$F = ma = 10\,000 \text{ kg} \times 0.0043 \text{ m/s}^2 = 43 \text{ N}$$

This reaction force will apply a bending moment to the robotic arm. Another type of load applied by the payload is torque due to the rotational motion. Canadarm2's rotational velocity and stopping angle are used.

Rotational Velocity:  $\omega = 0.24^\circ/\text{s} = 0.0042 \text{ rad/s}$  [9]

Rotational Stopping Distance:  $\theta = 3.8^\circ$  Leaving a 30% margin, Stopping Distance:  $\theta = 2.9^\circ = 0.051 \text{ rad}$

These two performance characteristics of Canadarm2 are associated with payload that has mass of 209000 kg and size of 4.5 m in diameter and 17 m in length. This mass is twice of the maximum required in RFP and the size of the payload was not specified in the RFP. The size of the payload handled by the robotic system is assumed half the length of Canadarm2

payload. This size is also a close resemblance of a service module on ISS [23].

Maximum payload mass from RFP:  $m = 10\,000\text{ kg}$  Payload size: diameter  $d = 4.5\text{ m}$ ; length  $l = 8.5\text{ m}$  Assume payload has uniform density, payload moment of inertia:

$$I = \frac{1}{4}m\left(\frac{d}{2}\right)^2 + \frac{1}{2}ml^2 = 253\,490\text{ kg m}^2$$

The axis for the moment of inertia is chosen according to the location of the grapple fixture on the ISS module[23]. The axis is marked as a black dotted line in Figure 12.

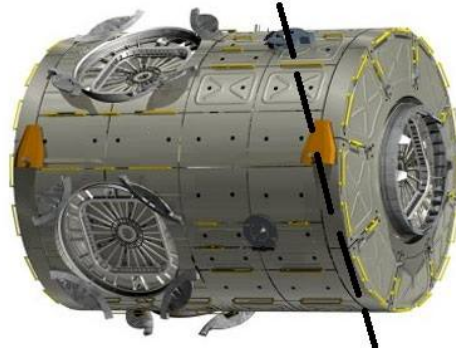


Figure 12: Axis used to calculate moment of inertia

Assuming payload rotational acceleration is constant, the following two equations are used to calculate rotational acceleration.

$$\theta = \omega_i t + \frac{1}{2}\alpha t^2 \quad (3)$$

$$\alpha = \frac{(\omega_f - \omega_i)}{t} \quad (4)$$

where:

$\omega_i = \omega$  is the initial rotational velocity of payload

$\omega_f = 0$  is the final rotational velocity of payload

This gives us the result of

$$t = 24\text{ s}, \alpha = 0.001\,77\text{ rad/s}^2$$

The reaction torque applied by the payload is then

$$\tau = I\alpha = 253\,490\text{ kg m}^2 \times 0.001\,77\text{ rad/s}^2 = 448.7\text{ N m}$$

## Holding/Reaction forces

Requirement **EE-P-02** states that the end effector subsystem shall apply holding or reaction forces of 200 N in any direction.

## Holding/Reaction forces

The robotic arm can be modeled as a cantilever beam and the highest load occurs when the arm is straight as shown in Figure 13 below. The holding and reaction force is higher than the payload reaction force, therefore the force of 200 N from holding and reaction is used.

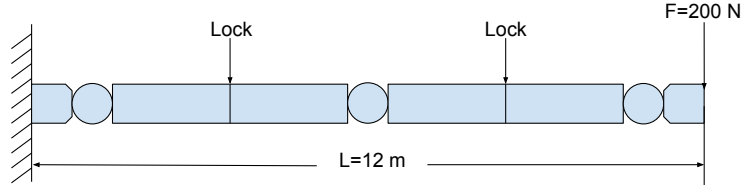


Figure 13: Maximum loading configuration of system

The maximum moment is at the end effector and shoulder joint.

$$M = FL = 2400 \text{ N m}$$

The moment at the lock where the telescopic boom is locked is:

$$M_{Lock} = FL_{Lock} = 1800 \text{ N m}$$

The moment at the elbow joint is:

$$M_{elbow} = FL_{elbow} = 1200 \text{ N m}$$

Given factor of safety of 1.5, the final bending moments on the arm are:

$$M = 3600 \text{ N m}, M_{Lock} = 2700 \text{ N m}, M_{elbow} = 1800 \text{ N m}$$

The rotational torque load on the arm is:

$$T = 448.7 \text{ N m} \cdot 1.5 = 673.05 \text{ N m}$$

## Other reference load requirement

### End Effector

The end effectors of Canadarm2 need to perform snare, rigidize and latch mechanism, the load transfer capability of the end effector are [9]:

- i) “950 N m torque and 1220 N m bending moment when snared and rigidized, allowing 3° separation at the interface.”
- ii) “3210 N m moment about any axis and 1110 N m axial/shear force when snared, rigidized

and latched and no separation at the interface”

### Vibrational Load

During the launch of the aircraft, the robotic system will experience vibrational load and shock load due to engine firing and engine cut off. While the type of the launch vehicle is specified in RFP, the common launch vehicles used are Atlas V and Delta IV, and design characteristics use these vehicles. The vibration design, shock design and testing characteristics are presented in Tables 12 and 13 below

Table 12: Vibration design, shock design and testing characteristics of Delta IV [24]

	Frequency (Hz)	Test Level	Sweep Rate
<b>Sinusoidal Vibration Axial</b>	5 to 7.4	1.27 cm double amplitude	2 octaves/min
	7.4 to 100	1.4 g (zero to peak)	
<b>Sinusoidal Vibration Lateral</b>	5 to 6.2	1.27 cm double amplitude	2 octaves/min
	6.2 to 100	1.0 g (zero to peak)	
<b>Shock</b>	150	120 g	N/A

Table 13: Vibration design, shock design and testing characteristics of Atlas V [25]

	Frequency (Hz)	Test Level	Sweep Rate
<b>Sinusoidal Vibration Axial</b>	5 to 100	1.125 g (zero to peak)	2 octaves/min
<b>Sinusoidal Vibration Axial</b>	5 to 100	0.75 g (zero to peak)	2 octaves/min
<b>Shock</b>	270	120 g	N/A



## B Transmitting Frequencies of Subsystems

Table 14: Frequencies of Subsystems

Component	Frequency of communication with DH (Hz)
<b>Motor/Brake Drive Amplifier</b>	20 [26]
<b>Resolvers</b>	300 [26]
<b>Camera</b>	20 [27]
<b>Proximity Sensor</b>	16500 [28]
<b>Force Sensor</b>	1000 [29]
<b>Torque Sensor</b>	1000[30]
<b>Thermocouple</b>	35 [18]

The rate of data transfer between DH and Outpost/Transport Vehicle is typically between 1 Hz to 12.5 Hz. For this robotic system, it can be reasonably assumed that data will be recorded at a rate of 1 Hz, with the possibility of obtaining the most updated data from DH when desired [31][32]. The only exception is the Camera and Lighting Unit (CLU), where the video feedback to the outpost will be about 20 Hz [27].

## C Temperature Range of Components

Table 15: Operational and Survival Temperature Ranges of various Components [9]

Component	Operational (°C)	Survival (°C)
Gears & Bearings	-25 to 135	-50 to 155
Motor Windings	-25 to 180	-50 to 200
Brakes	-25 to 99	-50 to 120
Cables & Connectors	-70 to 135	-90 to 155
Electronics	-20 to 65	-50 to 85

## Data from External Documents

### Typical Spacecraft Design Temperatures

Component/ System	Operating Temperature (C)	Survival Temperature (C)
Digital electronics	0 to 50	-20 to 70
Analog electronics	0 to 40	-20 to 70
Batteries	10 to 20	0 to 35
IR detectors	-269 to -173	-269 to 35
Solid-state particle detectors	-35 to 0	-35 to 35
Momentum wheels	0 to 50	-20 to 70
Solar panels	-100 to 125	-100 to 125

Figure 14: Typical Spacecraft Design Temperatures [33]

<p><b>Maximum</b></p> <p>Force 20-30 lb (situation, duration dependent)</p> <p><b>Minimum</b></p> <p>Torque 11 ft-lb = 0.6 lb</p> <p>Torque 11 ft-lb = 0.1 ft-lb</p> <p>Source: [4, 5]</p>	<p>The need for compliance combined with the need to perform precise manipulative functions suggests the further requirement that the end effector system possess variable, active compliance. The human operator could potentially directly control the degree of compliance.</p>																														
<p><b>Controlled, Directed Loads Applied During EVA</b></p> <p>Table 4-1</p> <table> <tr> <th>Load Description, Restrainted Crewmember Actuators</th><th>Load Limit</th></tr> <tr> <td>Gloved hand, steady-state force application</td><td>* 25 lb</td></tr> <tr> <td>Gloved hand, instantaneous or breakaway force</td><td>36 lb</td></tr> <tr> <td>Gloved hand torque, wing tab connector</td><td>** 50 in-lb</td></tr> <tr> <td>Gloved hand, single cycle hand squeeze</td><td>30 lb</td></tr> <tr> <td>Gloved finger, toggle switch actuation</td><td>** 0.63 to 6.25 lb</td></tr> <tr> <td>Booted foot, toe-button detent (one foot restrained)</td><td>** 4.0 to 20.0 lb</td></tr> </table> <p>Notes:</p> <ul style="list-style-type: none"> <li>* The useful work involves a 10-Btu work output for a 5-min duration, interspersed with a rest period between applications.</li> <li>** Force range includes a minimum value to ensure a resistance level for tactile feedback.</li> </ul> <p>Maximum Work Force Applications, EV Crewmembers (Data reproduced from reference [5])</p> <p>Table 4-2</p>	Load Description, Restrainted Crewmember Actuators	Load Limit	Gloved hand, steady-state force application	* 25 lb	Gloved hand, instantaneous or breakaway force	36 lb	Gloved hand torque, wing tab connector	** 50 in-lb	Gloved hand, single cycle hand squeeze	30 lb	Gloved finger, toggle switch actuation	** 0.63 to 6.25 lb	Booted foot, toe-button detent (one foot restrained)	** 4.0 to 20.0 lb	<table> <tr> <th>Load Description</th><th>Load Limit (lb)</th></tr> <tr> <td>Hand/arm forces on translation handholds, handrails, equipment tethers, and foot restraint attach points</td><td>* 100</td></tr> <tr> <td>Safety tethers, personnel</td><td>300</td></tr> <tr> <td>Exposed electrical harnesses -- gloved hand contact</td><td>20</td></tr> <tr> <td>Hand loading on wing tab connector/connector shells, inadvertent hand torque application of force to wing tabs</td><td>** 50</td></tr> <tr> <td>Multilayered insulation (MLI):</td><td></td></tr> <tr> <td>- Push and impact (normal to covered surfaces)</td><td>100</td></tr> <tr> <td>- Tension</td><td>20</td></tr> </table> <p>Notes:</p> <ul style="list-style-type: none"> <li>* Surfaces and structures within the normal EV crewmember access planes shall be constrained by this limit load.</li> <li>** Assumes a shell diameter greater than 1 inch plus two 1-inch wing tabs.</li> </ul> <p>Maximum Loads Inadvertently Imposed by Crewmember (Data reproduced from reference [5])</p> <p>Table 4-4</p>	Load Description	Load Limit (lb)	Hand/arm forces on translation handholds, handrails, equipment tethers, and foot restraint attach points	* 100	Safety tethers, personnel	300	Exposed electrical harnesses -- gloved hand contact	20	Hand loading on wing tab connector/connector shells, inadvertent hand torque application of force to wing tabs	** 50	Multilayered insulation (MLI):		- Push and impact (normal to covered surfaces)	100	- Tension	20
Load Description, Restrainted Crewmember Actuators	Load Limit																														
Gloved hand, steady-state force application	* 25 lb																														
Gloved hand, instantaneous or breakaway force	36 lb																														
Gloved hand torque, wing tab connector	** 50 in-lb																														
Gloved hand, single cycle hand squeeze	30 lb																														
Gloved finger, toggle switch actuation	** 0.63 to 6.25 lb																														
Booted foot, toe-button detent (one foot restrained)	** 4.0 to 20.0 lb																														
Load Description	Load Limit (lb)																														
Hand/arm forces on translation handholds, handrails, equipment tethers, and foot restraint attach points	* 100																														
Safety tethers, personnel	300																														
Exposed electrical harnesses -- gloved hand contact	20																														
Hand loading on wing tab connector/connector shells, inadvertent hand torque application of force to wing tabs	** 50																														
Multilayered insulation (MLI):																															
- Push and impact (normal to covered surfaces)	100																														
- Tension	20																														

Figure 15: End Effector Load Limits [34]

Such information as the models provide can not only be utilized to design future spacecraft, but can also be used to derive requirements for an inspection system. For example, the micrometeoroid impact features shown in Table 1 strongly indicate that in order to use an inspection system to revalidate future MMOD models, the system must be capable of detecting very small flaws in the range of 0.2 to 6.0 mm on surfaces of varying shape and specularity under orbital lighting conditions. This must take place while satisfying safe clearance requirements, as well as other requirements for mobility and safety such as smooth motion, collision free scanning, and so on.

**Table 1. Summary of LDEF Impact Features [2].**

<b>Feature Size (diameter)</b>	<b>Clamps,Bolts, &amp; Shims</b>	<b>Tray Flanges</b>	<b>Experimental Surfaces</b>	<b>Totals*</b>
< 0.3 mm	-	-	2911	3069
> 0.3 mm	-	-	763	763
< 0.5 mm	1318	1923	19342	27385
> 0.5 mm	161	419	2539	3119
<b>Totals</b>	<b>1479</b>	<b>2342</b>	<b>25555</b>	<b>34336</b>

\* Note: the "Total" is greater than the sum of the individual column entries for the "<0.3 mm" and the "<0.5 mm" rows because some of the features contributing to the total were detected on intermediate surfaces such as between the tray flanges and the experimental surfaces.

routine and repetitive ones. A number of candidate tasks have been identified based on our interactions with engineers at the Johnson Space Center (JSC) and various scientists working on LDEF. These include inspection of (1) truss strut damaged by micrometeoroids, (2) cracks in structures, (3) shield area damaged by micrometeoroids, (4) thermal blankets, radiators, or solar panels damaged by micrometeoroids and atomic oxygen, (5) thermal/mechanical interfaces at ORU installation sites, (6) deployable mechanisms for incorrectly positioned latches, connectors, and other mechanical devices, (7) the SSF shuttle docking port before each docking, (8) damaged fluid and power lines in a utility tray, (9) effects of fluid leaks on optics, and (10) magnetic fields, plasma fields, and contaminant levels, especially hydrazine concentration.

**Table 3. Experimental Results for Remote and Direct Micrometeoroid Inspection**

<b>Flaw Size</b>	<b>Remote Surface Inspection</b>	<b>Direct Inspection</b>
Large Marks, 10 Pixel (2.7 Mm)	Time-To-Completion: 178 Sec Accuracy: 93%	Time-To-Completion: 57 Sec Accuracy: 97%
Small Marks, 1 Pixel (0.27 Mm)	Time-To-Completion: 308 Sec Accuracy: 91%	Time-To-Completion: 118 Sec Accuracy: 94%

Figure 16: Requirements for Inspection Systems [35]

## D Power Consumption of various sensor types

Table 16: Power consumption of sensors

Part	Count	Average Power (W)	Peak Power (W)	Voltage (V)
Camera	3	1.75	2.5	5
Proximity Sensor	3	1.5	1.5	15
Force Sensor	2	1	1	5
Resolver	14	0.6	2	7
Torque Sensor	7	1	1	18
Lights	-	0	10	24
Total	-	27.15	59	-

## E Joint Motion Range for Canadarm2 and ERA

Table 17: Joint motion range for Canadarm2 and ERA

	Canadarm2 (Degree)	ERA(Degree)
<b>Shoulder Roll</b>	$\pm 270$	$\pm 270$
<b>Shoulder Yaw</b>	$\pm 270$	$\pm 120$
<b>Shoulder Pitch</b>	$\pm 270$	$\pm 120$
<b>Elbow Pitch</b>	$\pm 270$	+30 to -176
<b>Wrist Pitch</b>	$\pm 270$	$\pm 120$
<b>Wrist Yaw</b>	$\pm 270$	$\pm 120$
<b>Wrist Roll</b>	$\pm 270$	$\pm 185$