Website

中文版官网

EGT®

TEL: +86-750-7186633
FAX: +86-750-7186632

info@cn-egt.com

www.cn-egt.com
www.egtaudiosystem.com

No. F28 Civilian and Foreign Capital Industry Area,
Enping, Guangdong, China

广东省恩平市外资民资工业区F区28–29号

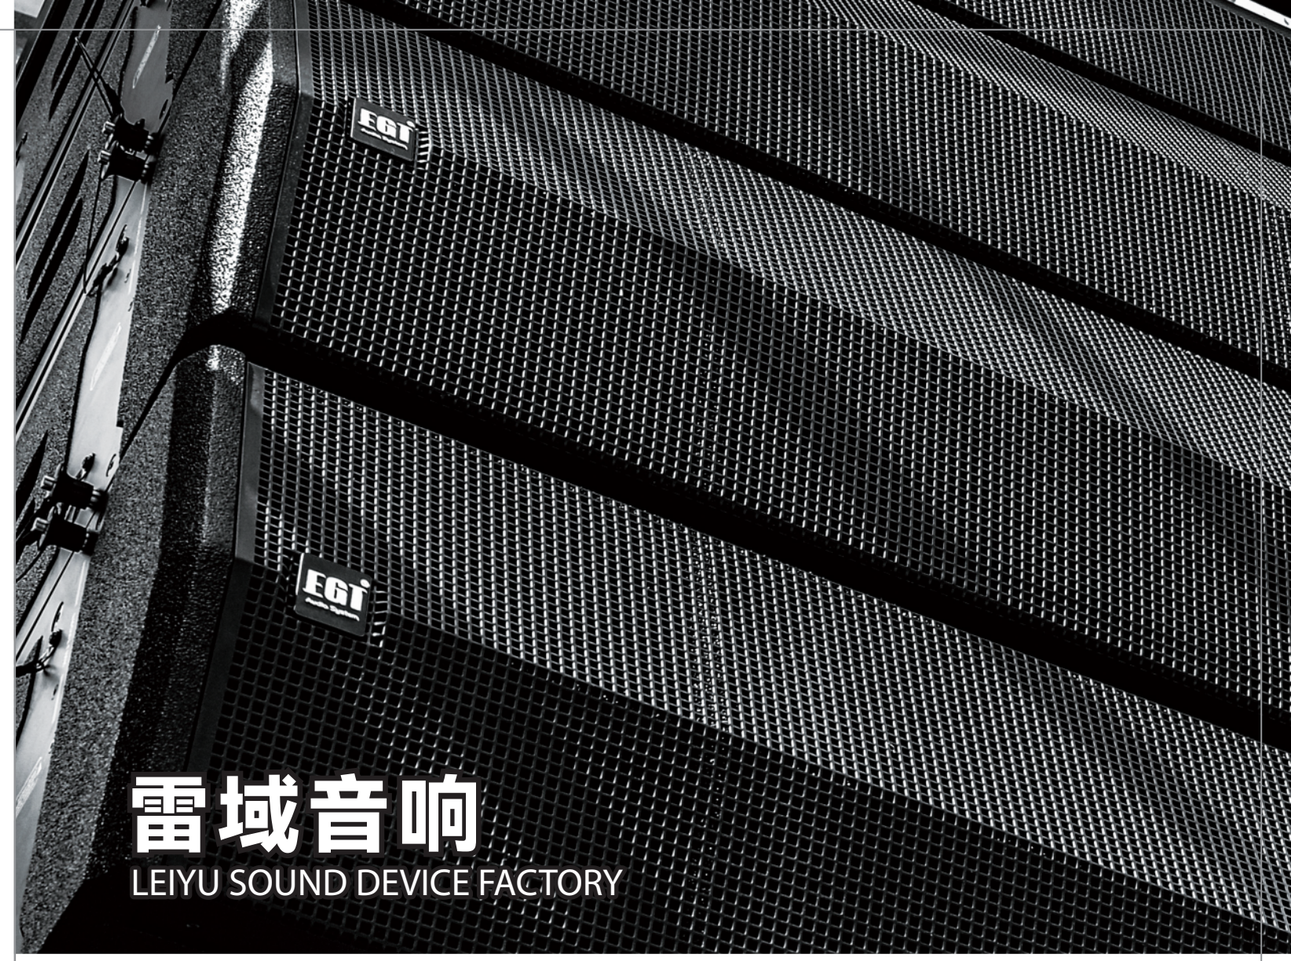

雷域音响

LEIYU SOUND DEVICE FACTORY

EGT®

Professional Audio System Manufacturer

Company Profile

雷域成立于2004年，

是专业音响系统制造商，

我们致力于还原声音本来的美，
用出色的音响设备释放音乐魅力。

Established in 2004, Leiyu is a professional manufacturer and exporter that is concerned with the design, development and production of pro-audio devices, such as passive loudspeakers, active loudspeakers, drivers, Line array, power amplifier, mixing console etc. Leiyu is located in Enping, Guangdong with convenient transportation access.

All of Leiyu's products comply with international quality standards and are greatly appreciated in a variety of different markets throughout the world. Covering an area of 6000 square meters, Leiyu now has over 60 employees, an annual sales figure that exceeds 6 million dollars and is currently exporting 70% of the products to different countries and areas.

The well-equipped facilities and excellent quality control throughout all stages of production enables Leiyu to guarantee total customer satisfaction. Besides, Leiyu has received ISO9001 certificate. The CNC centers (Computer Numerical Control center) and the own whole sealing painting center ensure the on-time delivery requirements.

The Sound Laboratory contains with an experienced and processional R&D team try all the best to provide an auditory carnival for every Leiyu's products user. It contains exterior design, electronics industry development, acoustics optimization test and application environment test etc.. Leiyu is capable to design and develop brand new models and functions as clients required.

EGT audio system is known as Leiyu's proprietary brand. As a result of the high quality products and outstanding customer service, Leiyu has gained a global sales network reaching north and south America, east Asian and Africa etc. Leiyu welcomes OEM or ODM cooperation.

Leiyu is looking forward to forming successful business relationships with clients around the world in the near future. Take Leiyu, take the fortune and future.

凭借国内外专家研发技术团队十余年对雷域音响品牌强势支持下，携手各地区的合作伙伴形成了广泛的营销网络。强大的技术力量与高素质的管理团队，雄厚的资金后盾与良好的企业信誉，敏锐的艺术领悟力与市场洞察力，雷域音响已成为一家颇具实力的专业音响系统的上游生产厂家，并在功放及音箱设计上已拥有众多的专利技术。

公司的生产质量管理先进，通过了ISO9001、功放产品3C等质量认证。在音频设备的生产方面，拥有一大批优秀的资历博深的科技研发人员、高素质生产管理人员、优秀的技术生产工人。10000平方米的生产车间、先进的生产设备和检测设备、独立完善的生产线，每一个产品都经过层层把关、屡屡试验，奠定了扎实的生产基础。

在工程设计方面，雷域音响的宗旨是实事求是、精益求精。从投资角度来审核前期设计工作的合理性、性价比以及各环节的配套。既满足消费者对娱乐设施音响效果的高品味、高素质的选择和需求，又为经营者提供最佳现场试听效果，充分保障投资方的利益。

选择雷域音响，就选择了财富与未来。

雷域音响成立于2004年，坐落于中国演艺装备产业基地-广东恩平，是一家专门从事优质扩声系统的研发、设计、制造、营销、技术及服务支持的高新科技企业。作为音响领域的专业厂商，雷域音响旗下自主品牌EGT、Meness、Wamr、Hibaosound各系列产品以声夺人、以质量取胜，成为业界享有盛誉的品牌，同时EGT和Meness品牌产品在多个国家备受追捧。

Table of Contents

Active Electric Robotic Lifting Line Array System
有源电动升降线阵系统
01~02: EASY-1018

Passive Line Array Speaker
无源线阵列音箱
03~04: VK Series
05~06: Nezha Series
07~08: GL Series

Active Line Array Speaker
有源线阵列音箱
09~10: GL DSP Series
11~12: VKX DSP Series

Passive Professional Speaker
无源专业音箱
13~14: RX Series
15~16: GF Series
17~18: TX Series
19: VS Series
20~22: POW Series

KTV Speaker
KTV包房箱
23: NB Series
24: K Series

Active Professional Speaker
有源专业音箱
25: AX DSP Series
26: TX DSP Series
27: KL Series
28: TR Series
29: RX DSP Series
30: CL4H Series
31: R Series
32: FX Series
33: RX Series

Home Theater System
家庭影音系统
34: CL4H Series
35: HK Series
36: SY Series

Coaxial Multipurpose Speaker
同轴多用途音箱
37: C Series

Professional Power Amplifier
专业功放
38: AK Series
39~40: BH Series
41: ET Series
42: KC Series
43: KM Series

44: DM Series
45: FW Series
46: KH Series
47: LY Series
48: MQ Series

ACTIVE ELECTRIC
ROBOTIC LIFTING LINE ARRAY SYSTEM

EASY-1018

有源电动升降线阵系统

Product Description

Single 18 "ultra low + double 10" coaxial active speaker.
90°x20° pointing.
Electric lifting system
1.5mm high strength steel mesh.
18mm high density multi-layer plywood.
Spray polyurea waterproof paint on the surface of the box.

产品描述

单18寸超低+双10寸同轴有源音箱。
90° x20° 指向。
电动升降系统
1.5mm高强钢网。
18mm高密度多层夹板。
箱体表面喷聚脲防水漆。

有源电动升降线阵系统

Active Electric Robotic Lifting Line Array System

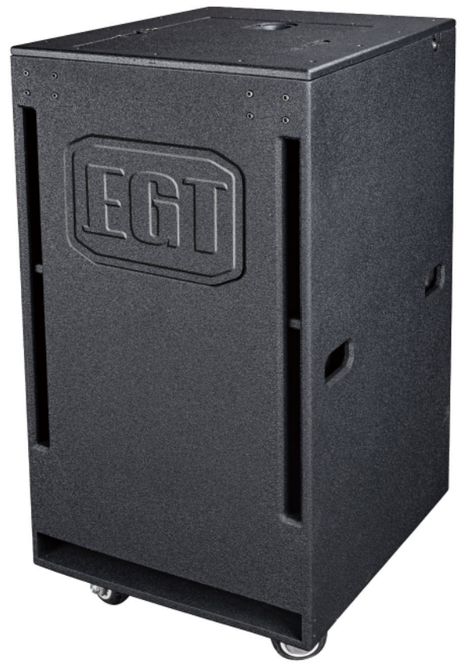

Description
描述

Active Electric Robotic Lifting
Line Array System
有源电动升降线阵系统

Configuration
配置

Active single 18"Subwoofer +
Double Coaxial Neodymium 10" 3-way Line Array
有源18寸+双10寸同轴三分频系统

Drivers
单元组成

LF 1×18" 220 Magnet 100mm Voile Coil
1 × 18" 100芯 超低音喇叭
HF+MF 2x10"Coxial Driver , 135 Neodymuim
Magnet 75 mm Voice Coil
2×10"，75芯 钕磁同轴喇叭

Acoustic 声学	
Frequency response -6dB 频率响应	40Hz ~ 18kHz
Max. SPL 最大声压值	129dB
Nominal coverage (H*V) 指向性	90°× 20°

Amplifier 功率放大器	
Type 类型	Class-D
Output power 输出功率	2x1200W@8ohm
THD 总谐波失真	0.05%
Cooling 冷却	Magnetic Aluminum Radiator + Temperature Control Variable Speed Fan 铝合金散热器+温控变速风扇z

DSP 数字音频处理	
A/D converter 模数转换	24bit Cirrus logic 48kHz
D/A converter 数模转换	24bit Cirrus logic 48kHz
Delay 延时	16ms
EQ 均衡	IIR：Hi/Low shelf，PEQ，Allpass Input 5 EQ + Output 9 EQ 输入5段+输出9段
Hi/Low pass Filter 高低通滤波	6/12/18/24dB/Oct
Compressor 压缩器	Root-mean-square compression 均方根压缩
Limiter 限幅器	Peak Clipping 削峰

Control 控制	
Display 显示 Indicator light	Colour Display Screen 彩色显示屏
指示灯	Protection / Overload / Signal 保护/过载/信号
PC 电脑	Mconsole Software Mconsole软件

Connecting 连接	
Power 电源	PowerCON Input / 输入 90-240V AC，with PFC / 带PFC功能
Interface 接口	TCP/IP，USB
Analog 模拟信号	Balanced XLR female input, XLR male output 平衡式XLR母输入，XLR公输出
Digital 数字信号	Optinal Two-Port Networks Dante 可选双网口Dante
Gain 增益调节	Input Attenuation Control 输入端衰减控制
Dimension（W×D×H）产品尺寸	Storage / 收纳状态：500×650×1130mm Working / 使用状态：500×650×1703mm
Weight 重量	100kg

EGT

VK

Product Description

VK series is a high-density waveguide compact sound reinforcement system, high-power continuous output, stable dynamic performance, on-site use of EASE simulation sound field and angle, making the speaker performance more perfect, fast and accurate sound reinforcement, complete and precise three-point Hanging and user-friendly connection operation make the VK series the first choice for indoor and outdoor sound reinforcement products. Designed for fixed installations, auditoriums, gymnasiums, performances and other large-scale event venues.

产品描述

VK系列是一款高压缩波导紧凑型扩声系统，具有高功率的持续输出，稳定的动态表现，良好的角度控制，使得音箱表现更加完美。
快速、精准的扩声，完整精密的四点式吊挂，人性化的连接操作，使得VK系列成为室内外扩声产品的首选。设计用于固定安装、礼堂、体育馆、演出等大型活动场所。

General Specifications

Model		VK208	VK210	VK212
Description 描述		Line Array Speaker 线阵音箱	Line Array Speaker 线阵音箱	Line Array Speaker 线阵音箱
Configuration 配置		2 × 8", 2-Way 双8寸, 2分频	2 × 10", 2-Way 双10寸, 2分频	2 × 12", Bi-amp 3-Way 双12寸, 两路3分频
Drivers 单元组成	LF	50 mm (8") Voice Coil Neodymium 2 × 8" 50芯 钕磁低音喇叭	2 × 10", 75mm Voice Coil Neodymium 2 × 10" 75芯 钕磁低音喇叭	2 × 12", 75mm Voice Coil Neodymium 2 × 12" 75芯 钕磁低音喇叭
	MF	/	/	2 × 10", 65mm Voice Coil Neodymium 2 × 10" 65芯 钕磁中音喇叭
	HF	75 mm Voice Coil Neodymium 2 × 1.4" 75芯 钕磁高音喇叭	2 × 10", 75mm Voice Coil Neodymium 2 × 1.4" 75芯 钕磁高音喇叭	2 × 1", 44mm Voice Coil Neodymium 2 × 1" 44芯 钕磁高音喇叭
Frequency Range 轴向频率响应		100Hz-16KHz	80Hz-16KHz	80Hz-16KHz
Sensitivity 灵敏度		98/106dB (f>100Hz)	101/111dB (f>100Hz)	100/102dB (f>100Hz)
MAX SPL 最大声压级		130/132dB	135/140dB	134/135dB
Nominal Impedance 标称阻抗		16+16Ω	8+8Ω	16+16Ω
Directionality 指向性		80 × 1-12°	80 × 1-10°	80 × 1-10°
Power Capacity: Continuous/Peak 功率：额定/峰值		400W+90W/1600W+360W	600W+220W/2400W+880W	700W+500W/2800W+2000W
Recommended amplifier 推荐功放（@8Ω）		600W-1000W	1000W~1500W	1000W~2000W
Enclosure material 箱体板材		Birch Plywood 桦木夹板		
Finish 表面处理		Waterproof Polyurea Paint 聚脲防水漆		
Dimension (W×D×H) 产品尺寸		616×427×220mm	616×594×285mm	1000×620×340mm
Net Weight(Kg) 产品净重		19	25	60

无源线阵列 VK系列

VK

Passive Line Array Speaker VK Series

General Specifications

Model		VK815	VK1018	VK218S
Description 描述		Line Array Subwoofer 线阵次低	Line Array Subwoofer 线阵次低	Subwoofer 低音炮
Configuration 配置		1× 15", 1-way 单15, 1分频	1 × 18", 1-Way 单18寸, 1分频	2 × 18", 1-Way 双18寸, 1 分频
Drivers 单元组成	LF	100 mm (15") Voice Coil Neodymium 1 × 15" 100芯 低音喇叭	100 mm (18") Voice Coil Ferrite 1 × 18" 100芯 低音喇叭	100 mm (18") Voice Coil Ferrite 2 × 18" 100芯 低音喇叭
	MF	/	/	/
	HF	/	/	/
Frequency Range 轴向频率响应		40Hz-250Hz	36Hz-220Hz	38Hz-250Hz
Sensitivity 灵敏度		96dB (f>100Hz)	98dB (f>100Hz)	102dB(f>100Hz)
MAX SPL 最大声压级		125dB	131dB	138dB
Nominal Impedance 标称阻抗		8Ω	8Ω	4Ω
Directionality 指向性		/		
Power Capacity: Continuous/Peak 功率：额定/峰值		500W/2000W	600W/2400W	1200W/4800W
Recommended amplifier 推荐功放（@8Ω）		600W-1000W	800W-1200W	1200W~1500W
Enclosure material 箱体板材		Birch Plywood 桦木夹板		
Finish 表面处理		Waterproof Polyurea Paint 聚脲防水漆		
Dimension (W×D×H) 产品尺寸		616×682×450mm	616×746×530mm	700×1200×550mm
Net Weight(Kg) 产品净重		44	46	71

Nezha E-LY212

Feature

Nezha series, E-LY212 dual 12-inch line array speaker adopts passive two-way frequency, built-in bipolar dual arrangement 2x12" low frequency unit, two 75-core high-frequency compression drivers and equipped with acoustic lens waveguide device, exquisite horn geometric design, With the advanced bass reflex port design, it can provide the reduction performance of the spring frequency band and further expand the low frequency response. It can be used with E-LY218S dual 18-inch subwoofers. The front panel of the speaker is protected by a hard metal mesh cover. Acoustic foam is attached to the back of the net cover. The side panels are equipped with handles, and two additional embedded handles are provided at the bottom of the rear of the box.

Passive Dual 12" Line Array Speaker Nezha Series
双12寸无源线阵列 Nezha 系列

产品描述

Nezha系列， E-LY212双12寸线阵音箱采用无源两分频，内置双极对偶布置2x12"低频单元，两只75芯高频压缩驱动器并装有声透镜波导装置，精妙的号角几何设计，配合先进的低音反射式气口设计，可提供全频段的还原性能，并进一步扩展了低频响应，可搭配E-LY218S双18寸超低音炮使用。音箱的前面板采用坚硬的金属网罩作保护，网罩后附有透声海绵。侧面板均配有把手，箱体后方底部提供两个额外的嵌入式把手。
设计用于固定安装、礼堂、体育馆、演出等大型活动场所。

无 源 线 阵 列 系 统

Nezha E-LY212

Passive Line Array System

General Specifications

Model		E-LY212	E-LY218S
Description 描述		Line Array Speaker 线阵音箱	Subwoofer 低音炮
Configuration 配置		2 × 12", 2-Way 双12寸, 2分频	2 × 18", 1-way 双18寸, 1分频
Drivers 单元组成	LF	2 × 12", 75mm Voice Coil 2 × 12" 75芯低音喇叭	100 mm (18") Voice Coil Ferrite 2 × 18" 100芯 低音喇叭
	HF	2 × 1.4", 75mm Voice Coil Neodymium 2 × 1.4" 75芯 钕磁高音喇叭	/
Frequency Range 轴向频率响应		80-18kHz	35-180Hz
Sensitivit(1m/1W) 灵敏度		LF:100dB HF:108dB	100dB
MAX SPL 最大声压级		LF:133dB HF:1136dB	139dB
Nominal Impedance 标称阻抗		LF:8 ohm HF:8 ohm	4Ω
Directionality 指向性		90° × 10°	/
Power Capacity: Continuous/Peak 功率：额定/峰值		800W+160W / 2400W+640W	2000W / 8000W
Recommended AMP Power 推荐功放（@8Ω）		1200W~1500W	1500W~2000W
Enclosure material 箱体板材		Birch Plywood 桦木夹板	
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆	
Dimension (W×D×H) 产品尺寸		925×634×375mm	1314×727×540mm
Net Weight(Kg) 产品净重		58	86

THE HIGH FREQUENCY PART OF THE GL SERIES LINE ARRAY SPEAKER

is composed of a lightweight and extremely sensitive treble driver combined with a special acoustic wave correction module

so that the waveform deviation Angle of the entire high frequency is controlled in a very low range, effectively increasing the upper coupling frequency of the high frequency. The vertical coverage Angle of the high frequency is designed to be 10 degrees according to the design criteria of its deviation Angle, effectively avoiding acoustic interference between each module.
The Angle step is set to 0°, 5°, 10°, and the medium and low frequency parts are driven by two highly sensitive 10-inch units, which are installed at very small distances, so that the upper limit of the effective frequency can be extended as far as possible, while ensuring that the frequency response within the horizontal coverage Angle remains quite consistent.
Due to the high resistance 16Ω design of built-in passive 2 frequency division, it also provides great convenience for the configuration of the power amplifier, and only one channel of the power amplifier is required, that is, it can drive four full-frequency speakers to form a basic line array.
GL series line array speaker with iron and aluminum alloy fast hanging system, supporting fast pins, can build a complete array system in a very short time.
GL12S matches GL206 to form a dual 6-inch line array.
GL15S matches GL208 to form a double 8-inch line array.
GL18S matches GL210 to form a dual 10-inch cable array.

GL Series

PASSIVE LINE ARRAY SPEAKER

无源线阵列GL系列

EGT

GL系列线阵音箱高频部分由1个重量轻而且灵敏度极高的高音驱动器配合专用的声波修正模块组合成而成，使得整个高频的波形偏离角控制在极低的范围，有效提升高频的上限耦合频率。高频的垂直覆盖角度按照其偏离角的设计准则设计成10度，有效避免每个模块之间出现声广涉现象。

角度步进设置为0°、5°、10°，中、低频部分由两只高灵敏度的10寸单元驱动，两个单元安装的位置距离非常之小，使得其有效可用的上限频率得到尽可能的延伸，同时也保证在水平覆盖角度内的频响保持相当好的一致性。

由于采用了内置无源2分频的高阻16欧设计，也为功放的配置提供极大的方便，只需要一个通道的功率放大器，即可以驱动4只全频音箱，组成一个基本的阵列形式。

GL系列线阵音箱带有铁铝合金快速吊挂系统，配套快速插销，能在极短的时间内搭建出一整套阵列系统。

GL12S匹配GL206组成双6寸线阵列使用，
GL15S匹配GL208组成双8寸线阵列使用，
GL18S匹配GL210组成双10寸线阵列使用。

无源线阵列GL系列

GL

Passive Line Array Speaker GL Series

General Specifications

Model		GL206	GL208	GL210	GL12S	GL15S	GL18S
Description 描述		Line Array Speaker 线阵音箱	Line Array Speaker 线阵音箱	Line Array Speaker 线阵音箱	Line Array Subwoofer 线阵次低	Line Array Subwoofer 线阵次低	Line Array Subwoofer 线阵次低
Configuration 配置		2x6", 2-way, Built in Crossover 双6寸, 2分频, 内置分频	2x8", 2-way, Built in Crossover 双8寸, 2分频, 内置分频	2 x 10", 2-Way, Built in Crossover 双10寸, 2分频, 内置分频	1x12", 1-way 单12寸, 1分频	1x15", 1-way 单15寸, 1分频	1x18", 1-way 单18寸, 1分频
Drivers 单元组成	LF	38 mm (6") Voice Coil 2 x 6" 38芯 低音喇叭	50 mm (8") Voice Coil 2 x 8" 50芯 低音喇叭	65 mm (10") Voice Coil 2 x 10" 65芯 低音喇叭	75mm (12") Voice Coil 1 x 12" 75芯 低音喇叭	91mm (15") Voice Coil 1 x 15" 91芯 低音喇叭	100mm (18") Voice Coil 1 x 18" 100芯 低音喇叭
	HF	34 mm Voice Coil 34芯 高音喇叭	44 mm Voice Coil 44芯 高音喇叭	75 mm Voice Coil 75芯 高音喇叭	/	/	/
Frequency Range 轴向频率响应		120Hz-18KHz	100Hz-18KHz	80Hz-18KHz	50Hz-200Hz	50Hz-200Hz	42Hz-200Hz
Sensitivit(1m/1W) 灵敏度		99dB	101dB	102dB	95dB	97dB	97dB
MAX SPL 最大声压级		124dB	128dB	130dB	120dB	124dB	124dB
Nominal Impedance 标称阻抗		16Ω	16Ω	16Ω	8Ω	8Ω	8Ω
Directionality 指向性		100°x1-10°	90°x1-10°	70°x1-10°	/	/	/
Power Capacity: Continuous/Peak 功率：额定/峰值		300W / 600W	500W / 1000W	600W / 1200W	/	/	/
Recommended AMP Power 推荐功放(@8Ω)		400W-600W	600W-1000W	800W-1200W	500W-700W	600W~1000W	600W~1000W
Enclosure material 箱体板材		High Quality Birch Plywood 桦木夹板					
Finish 表面油漆		Rugged tour-grade textured paint 黑色水性油漆					
Dimension (WxDxH) 产品尺寸		510x332x193mm	590x368x253mm	710x422x293mm	510x464x350mm	590x520x440mm	710x582x500mm
Net Weight(Kg) 产品净重		15	22	30	22	29	37

Feature

GL series active subwoofer is a compact ultra-low frequency speaker with direct launch design. The driver adopts a direct reflection box design, and the height of the overall speaker is controlled to the maximum extent, which makes the height effective and reduces the installation height requirements of the whole group of linear array speakers. The selection of high-power drive unit, to provide a strong low-frequency response at the same time, but also increase the effective range of low-frequency.
Speaker built-in dual-channel high-power class D digital amplifier, power supply with PFC, global universal input voltage interface, working voltage 100-240V adaptive, with a channel output interface, can drive 4 GL series full frequency speakers. Built-in high-performance DSP processor, optional Dante digital input interface function, network and USB control interface, can be wireless and remote group control.
All series with aluminum alloy quick hanging system, supporting fast pins, can build a complete array system in a very short time.
GL12S-DSP matches GL206 to form a dual 6-inch active line array.
GL15S-DSP matches GL208 to form a dual 8-inch active line array.
The GL18S-DSP matches the GL210 to form a dual 10-inch active line array.

GL Series

ACTIVE

LINE ARRAY SUBWOOFER

有源线阵列低音炮

产品描述

GL系列有源低音炮是直接发射式设计的紧凑型超低频音箱，驱动器采用直接反射式箱体设计，整体音箱的高度最大限度的进行了控制，使得高度有效的减少，减低了整组线阵音箱的对空间的安装高度要求。而选用大功率的驱动单元，提供强劲有力的低频响应的同时，也增加了低频的有效射程。

音箱内置双通道大功率D类数字放大器，电源带PFC，全球通用输入电压接口，工作电压100-240V自适应，带有一个通道的输出接口，可以驱动4只GL系列全频音箱。内置高性能DSP处理器，可选Dante数字输入接口功能，网络及USB控制接口，可以进行无线及远距离群组控制。

全系列带有铝合金快速吊挂系统，配套快速插销，能在极短的时间内搭建出一整套阵列系统。

GL12S-DSP匹配GL206组成双6寸有源线阵列使用，
GL15S-DSP匹配GL208组成双8寸有源线阵列使用，
GL18S-DSP匹配GL210组成双10寸有源线阵列使用。

General Specifications

Model	GL12S-DSP	GL-15S-DSP	GL18S-DSP
Description 描述	Activce Line Array Subwoofer 有源线阵次低	Activce Line Array Subwoofer 有源线阵次低	Activce Line Array Subwoofer 有源线阵次低
Configuration 配置	1x12", 1-way 单12寸, 1分频	1x15", 1-way 单15寸, 1分频	1x18", 1-way 单18寸, 1分频
Drivers 单元组成	LF - 75mm (12") Voice Coil 1 x 12" 75芯 低音喇叭	LF - 91mm (15") Voice Coil 1 x 15" 91芯 低音喇叭	LF - 100mm (18") Voice Coil 1 x 18" 100芯 低音喇叭
Acoustic 声学			
Frequency response -6dB 频率响应	50Hz-200Hz	50Hz-200Hz	42Hz-200Hz
Max. SPL 最大声压值	95dB	97dB	97dB
Amplifier 功率放大器			
Type 类型	Class-D		
Output power 输出功率	2x800W@8ohm	2x1200W@8ohm	2x1200W@8ohm
THD 总谐波失真	0.05%		
Cooling 冷却	Magnetic Aluminum Radiator + Temperature Control Variable Speed Fan 铝合金散热器+温控变速风扇		
DSP 数字音频处理			
A/D converter 模数转换	24bit Cirrus logic 48kHz		
D/A converter 数模转换	24bit Cirrus logic 48kHz		
Delay 延时	16ms		
EQ 均衡	IIR：Hi/Low shelf，PEQ，Allpass Input 5 EQ + Output 9 EQ 输入5段+输出9段		
Hi/Low pass Filter 高低通滤波	6/12/18/24dB/Oct		
Compressor 压缩器	Root-mean-square compression 均方根压缩		
Limiter 限幅器	Peak Clipping 削峰		
Control 控制			
Display 显示	Colour Display Screen 彩色显示屏		
Indicator light 指示灯	Protection / Overload / Signal 保护/过载/信号		
PC 电脑	Mconsole Software Mconsole软件		
Connecting 连接			
Power 电源	PowerCON Input / 输入		
Interface 接口	TCP/IP，USB		
Analog 模拟信号	Balanced XLR female input, XLR male output 平衡式XLR母输入，XLR公输出		
Digital 数字信号	Optinal Two-Port Networks Dante 可选双网口Dante		
Gain 增益调节	Input Attenuation Control 输入端衰减控制		
Dimension（W×D×H）产品尺寸	510x464x350mm	590x520x440mm	710x582x500mm
Weight 重量	30kg	35Kg	42Kg

VKX210L-DSP

Feature

VKX210L-DSP is a compact line array speaker with an active 2-way frequency design with a network interface. It is designed in full accordance with the latest theory of linear sound sources. Each speaker consists of two 1-inch 44mm voice coil tweeters. The driver is composed of two 65mm voice coil bass drivers.

VKX210L-DSP is equipped with a built-in high-performance DSP and a 2x500W Class D power amplifier module. With its USB control and remote TCP/IP control, it is efficiently used with its management software, the working status of all devices on the network can be monitored in real time, including temperature and output power.

Using sophisticated DSP signal processing, including frequency division, equalization, delay, limiting, the power amplifier module promotes high and low bass.

Active Dual 10" Line Array Speaker
VKX DSP Seires

双10寸有源线阵列音箱
VKX DSP 系列

产品描述

VKX210L-DSP是一款具备网络接口的有源2路2分频设计的紧凑型线性声源阵列音箱，完全按照线性声源的最新理论设计，每个音箱由2个口径1寸的44mm音圈的高音驱动器和2个65mm音圈的低音驱动器组成。

VKX210L-DSP内置高性能DSP及2x500W Class D功率放大模块。采用提供本地USB控制及远程TCP/IP控制，配合专用管理软件，可以实时监控网络上的所有设备的工作状态，包括温度、输出功率。

采用精密的DSP信号处理，包括分频、均衡、延时、限幅，独立的功率放大器推动高低音单元。

全频有源线阵音箱

VKX210L-DSP

Active Line Array Speaker

General Specifications

Model	VKX210L-DSP	VKX1018L-DSP
Transducer 喇叭配置		
HF Driver 高音单元	Two constant pointing horn 1 inch openings, compression high frequency drive unit 两个恒定指向号角1寸开口，压缩高频驱动单元	/
	120mm ferrite magnet, 44mm voice coil 120mm铁氧体磁体，44mm音圈	/
LF Driver 低音单元	2 × 10"	2 × 18"
	156mm ferrite magnet, 65mm voice coil 156mm铁氧体磁体，65mm音圈	220mm ferrite magnet, 100mm voice coil 220mm铁氧体磁体，100mm音圈
Cabinet 箱体		
Enclosure material 箱体板材	Birch Plywood 桦木夹板	Birch Plywood 桦木夹板
Finish 表面处理	Rugged tour-grade textured paint 黑色水性耐磨漆	Rugged tour-grade textured paint 黑色水性漆
Net铁网	1.2mm thick 6mm hexagonal iron mesh with black flat powder on the surface 1.2mm厚6mm六角孔铁网，表面喷黑色平光粉	1.5mm thick 6mm hexagonal iron mesh with black flat powder on the surface 1.5mm厚6mm六角孔铁网，表面喷黑色平光粉
Horn 号角	Foaming 发泡	/
Flying points吊挂	Quick hanging system 快速吊挂系统	Quick hanging system 快速吊挂系统
Handle把手	Left and right 左右各两个	Left and right 左右各两个
Acoustic 声学		
Frequency response -6dB 频率响应	80Hz - 18KHz	38Hz-250Hz
Max. SPL 最大声压值	126dB	131dB
Nominal coverage (H*V) 指向性	80° × 10°	/
Amplifier 功率放大器		
Type 类型	2-Channel Class-D 两通道 Class-D	1-Channel Class-D 单通道 Class-D
Output power 输出功率	2x500W	1x1000W
THD 总谐波失真	0.05%	0.05%
Cooling 冷却	Aluminum alloy radiator 铝合金散热器	Aluminum alloy radiator 铝合金散热器
DSP 数字音频处理		
A/D converter 模数转换	24bit Cirrus logic 48KHz	24bit Cirrus logic 48KHz
D/A converter 数模转换	24bit Cirrus logic 48KHz	24bit Cirrus logic 48KHz
Delay 延时	Low: -12dB/Oct; High: -12dB/Oct	Low: -12dB/Oct; High: -12dB/Oct
EQ 均衡	Input 120ms + output 20ms 输入120ms+输出20ms	Input 120ms + output 20ms 输入120ms+输出20ms
Hi/Low pass Filter 高低通滤波	IIR：Hi/Low shelf，PEQ，Allpass	IIR：Hi/Low shelf，PEQ，Allpass
Compressor 压缩器	RMS compression 均方根压缩	RMS compression 均方根压缩
Limiter 限幅器	Peak Cut 削峰	Peak Cut 削峰
Control 控制		
Display 显示	Color display 彩色显示屏	Color display 彩色显示屏
Indicator Light 指示灯	Protection / Overload / Signal 保护/过载/信号	Protection / Overload / Signal 保护/过载/信号
PC 电脑	Mconsole Software Mconsole 软件	Mconsole Software Mconsole 软件
Connecting连接		
Power 电源	PowerCON input / output PowerCON输入/输出	PowerCON input / output PowerCON输入/输出
Interface 接口	TCP/IP，USB，RS485	TCP/IP，USB，RS485
Analog 模拟信号	Balanced XLR female input, XLR male output 平衡式XLR母输入，XLR公输出	Balanced XLR female input, XLR male output 平衡式XLR母输入，XLR公输出
Digital 数字信号	N/A 无	N/A 无
Gain 增益调节	Input attenuation control 输入端衰减控制	Input attenuation control 输入端衰减控制
Dimension（W×D×H）产品尺寸	580×580×285mm	580×580×285mm
Net Weight(Kg) 产品净重	28	49

RX

PASSIVE PROFESSIONAL SPEAKER
无 源 专 业 音 箱

Feature

The RX series is developed using advanced electro-acoustic design concepts.
Its ultimate performance meets the needs of high-level sound reinforcement.
At the same time, the birth of the RX series also demonstrates EGT audio's pursuit of the ultimate sound.
EGT's specially customized frequency divider efficiently ensures the seamless combination of crossover points,
making the entire sound density high, stable, beautiful, and delicate.
The RX series speakers release exciting dynamics, with ultra-precise coverage angles,
polar distortion units, and ultra-high sound pressure level output.
Once launched, RX series, have been widely praised by the market.

产品描述

RX系列是运用先进的电声设计理念开发而成，其极致表现满足了高级别的扩声需求。

同时RX系列的诞生也彰显了EGT audio对极致好声音的追求。

EGT特别定制的分频器高效保证了分频点的无缝结合，使得整个声音密度高，平稳，优美，细腻。

RX系列音箱放出令人兴奋的动态，超精准的覆盖角度、极地的失真单元、超高声压级输出，一经推出便受到市场的广泛推崇。

EGT®

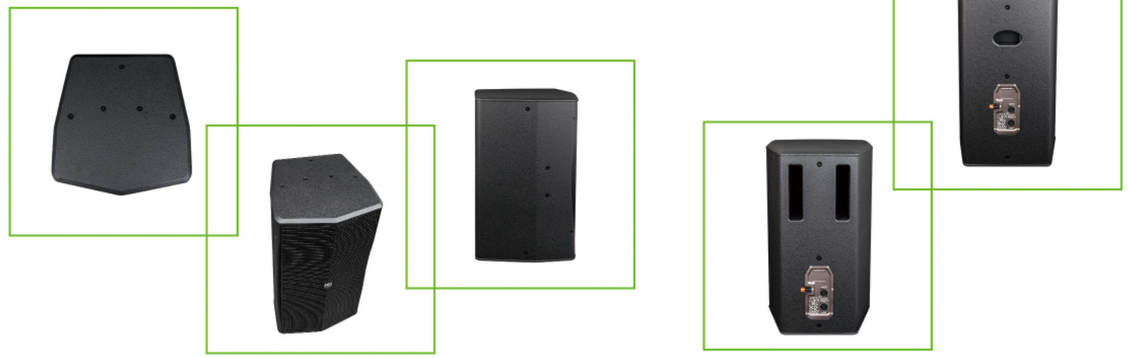

无 源 专 业 音 箱

RX

Passive Professional Speaker

General Specifications

Model		RX-110	RX-112	RX-115	RX-210	RX-215
Description 描述		Entertainment Speaker 娱乐箱	Entertainment Speaker 娱乐箱	Entertainment Speaker 娱乐箱	Entertainment Speaker 娱乐箱	Entertainment Speaker 娱乐箱
Configuration 配置		1 × 10", 2-way 单10, 2分频	1 × 12", 2-way 单12, 2分频	1 × 15", 2-way 单15, 2分频	2 × 10", 3-way 双10, 3分频	2 × 15", 2-way 双15, 2分频
Drivers 单元组成	LF	1 × 10" 1 × 10" 低音喇叭	1 × 12" 1 × 12" 低音喇叭	1 × 15" 1 × 15" 低音喇叭	2 × 10" 2 × 10" 低音喇叭	2 × 15" 2 × 15" 低音喇叭
	HF	44 mm voice coil 44芯 高音喇叭	44 mm voice coil 44芯 高音喇叭	1 × 1.75", 75 mm voice coil 1 × 1.75" 75芯 高音喇叭	2 × 3", 13 mm voice coil 2 × 3" 13芯 高音喇叭	1 × 1.75", 75 mm voice coil 1 × 1.75", 75芯 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		250W/1000W	350W/1400W	400W/1600W	300W/1200W	800W/3200W
Recommended AMP Power 推荐功放（@8Ω）		300W~500W	500W	500W~1000W	450W	1000W
Nominal Impedance 标称阻抗		8Ω	8Ω	8Ω	4Ω	4Ω
Frequency Range 频率范围		60Hz-19KHz	55Hz-19KHz	45Hz-19KHz	45Hz-20KHz	40Hz-18KHz(±3dB)
Sensitivity(1m/1W) 灵敏度		95dB	97dB	98dB	98dB	100dB
MAX SPL 最大声压级		119dB	122dB	124dB	123dB	129dB
Power Connector 接头		Neutrik® Connector Neutrik®接头				
Enclosure material 箱体板材		Birch Plywood 桦木夹板			High Density Board 高密度板	Birch Plywood 桦木夹板
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆				
Dimension (W×D×H) 产品尺寸		310×360×520mm	360×420×590mm	440×435×700mm	375×395×600mm	500×520×1240mm
Net Weight(Kg) 产品净重		19	22	31	42	59

GF

PASSIVE PROFESSIONAL SPEAKER

无 源 专 业 音 箱

Feature

The GF series is one of the full multi-function speaker series. It adopts the high-strength splint combined with the groove wedge technology.
The cabinet has a stronger structure, more robustness and durability.
The GF series is a high-performance built-in two-way speaker with a scientific and reasonable crossover point.
While ensuring the stable operation of the unit, the output is uniform and transparent,
clear and delicate sound quality, creating a perfect sound in the whole frequency range, with plenty of rated power,
providing a source Constantly high sound pressure level, flexible application methods and reliable high stability.
Scope of application: including live performances, bars and dance halls, KTV,
multi-function hall auditoriums, schools and other scenes.

产品描述

GF系列是全多功能音箱系列之一，采用高强度夹板结合入槽锲结工艺，箱体具有更坚固的结构，更加坚固和耐用性。

GF系列是高性能内置二分频扬声器，科学合理的分频点，在保障单元稳定运行的同时输出均匀通透，清晰细腻的音质，打造全频段完美的音色，拥有充沛的额定功率，提供源源不断的高声压级，灵活多变的应用方式和可靠的高稳定性。

适用范围：包括现场演出、酒吧和舞厅、KTV、多功能厅礼堂、学校等场景的扩声。

EGT

General Specifications

Model		GF-6.5	GF-206	GF-8	GF-10	GF-12	GF-15
Description 描述		Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱
Configuration 配置		1×6.5", 2-way 单6.5, 2分频	2×6.5", 2-way 双6.5, 2分频	1×8", 2-way 单8, 2分频	1×10", 2-way 单10, 2分频	1×12", 2-way 单12, 2分频	1×15", 2-way 单15, 2分频
Drivers 单元组成	LF	165 mm (6.5") driver 低音喇叭	165 mm (6.5") driver 低音喇叭	203 mm (8") driver 低音喇叭	254 mm (10") driver 低音喇叭	305 mm (12") driver 低音喇叭	381 mm (15") driver 低音喇叭
	HF	25 mm voice coil 高音喇叭	25 mm voice coil 高音喇叭	34 mm voice coil 高音喇叭	34 mm voice coil 高音喇叭	44 mm voice coil 高音喇叭	44 mm voice coil 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		180W/720W	280W/1120W	280W/1120W	350W/1400W	400W/1600W	450W/1800W
Recommended AMP Power 推荐功放		300W	450W	350W	500W	600W	800W
Nominal Impedance 标称阻抗		8Ω	4Ω	8Ω	8Ω	8Ω	8Ω
Frequency Range 频率范围		80Hz-18KHz(±3dB) 68Hz-20kHz(-10dB)	63Hz-18KHz(±3dB) 54Hz-20kHz(-10dB)	63Hz-18KHz(±3dB) 55Hz-20kHz(-10dB)	60Hz-18KHz(±dB) 50Hz-20kHz(-10dB)	53Hz-18KHz(±3dB) 40Hz-20kHz(-10dB)	50Hz-18KHz(±3dB) 40Hz-20kHz(-10dB)
Sensitivity(1m/1W) 灵敏度		92dB	95dB	93dB	95dB	96dB	97dB
MAX SPL 最大声压级		121dB	123dB	123dB	126dB	128dB	130dB
Enclosure material 箱体板材		Birch Plywood 桦木夹板					
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆					
Dimension (W×D×H) 产品尺寸		218×268×336mm	218×268×513mm	245×280×397mm	295×327×515mm	350×423×605mm	429×490×708mm
Net Weight(Kg) 产品净重		5	9	10	14	22	29

无 源 专 业 音 箱

GF

Passive Professional Speaker

General Specifications

Model		GF-12M	GF-15M	GF-215	GF-18B	GF-218B
Description 描述		Stage Monitor 舞台监听	Stage Monitor 舞台监听	Loudspeaker 音箱	Subwoofer 超低频扬声器	Subwoofer 超低频扬声器
Configuration 配置		1×12", 2-way 单12, 2分频	1×15", 2-way 单15, 2分频	2×15", 2-way 双15, 2分频	1×18",1-way 单18, 1分频	2×18",1-way 双18, 1分频
Drivers 单元组成	LF	305 mm (12") driver 低音喇叭	381 mm (15") driver 低音喇叭	381 mm (15") driver 低音喇叭	457 mm (18") driver 低音喇叭	457 mm (18") driver 低音喇叭
	HF	44 mm voice coil 高音喇叭	44 mm voice coil 高音喇叭	75 mm voice coil 高音喇叭	/	/
Power Capacity: Continuous/Peak 功率：额定/峰值		400W/1600W	450W/1800W	850W/3400W	600W/2400W	1200W/4800W
Recommended AMP Power 推荐功放（@8Ω）		600W	800W	1000W	900W	1200W
Nominal Impedance 标称阻抗		8Ω	8Ω	4Ω	8Ω	4Ω
Frequency Range 频率范围		54Hz-18KHz(±3dB) 48Hz-20KHz(-10dB)	44Hz-18KHz(±3dB) 36Hz-20KHz(-10dB)	36Hz-18KHz(±3dB) 28Hz-20KHz(-10dB)	34Hz-200Hz(±3dB) 30Hz-300Hz(-10dB)	32Hz-200Hz(±3dB) 28Hz-300Hz(-10dB)
Sensitivity(1m/1W) 灵敏度		95dB	97dB	100dB	97dB	102dB
MAX SPL 最大声压级		127dB	130dB	135dB	134dB	142dB
Enclosure material 箱体板材		Birch Plywood 桦木夹板				
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆				
Dimension (W×D×H) 产品尺寸		430×409×605mm	490×430×708mm	496×571×1201mm	505×773×580mm	1230×693×575mm
Net Weight(Kg) 产品净重		22	27	55	44	88

TX

PASSIVE PROFESSIONAL SPEAKER

无 源 专 业 音 箱

Feature

TX passive Loudspeakers were designed to provide the sensitivity, frequency response and power handling needed to address a multitude of demanding audio environments while still being reasonably priced. For musicians, DJ's, House of Worship, public address, or suspended in a commercial environment like a school or nightclub, they can be used with a powered mixer or a full rack of amps and signal processing, delivering the sound power and bandwidth necessary to make loud music sound natural and even quiet speech intelligible.

产品描述

TX系列是全多功能音箱系列之一，采用高密度板结合入槽锲结工艺，箱体具有更坚固的结构，更加坚固和耐用性。

TX系列是高性能内置二分频扬声器，科学合理的分频点，在保障单元稳定运行的同时输出均匀通透，清晰细腻的音质，打造全频段完美的音色。

拥有充沛的额定功率，提供源源不断的高声压级，灵活多变的应用方式和可靠的高稳定性。

适用范围：包括现场演出、酒吧和舞厅、KTV、多功能厅礼堂、学校等场景的扩声。

EGT

General Specifications

Model		TX-6.5	TX-8	TX-10	TX-12
Description 描述		Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱
Configuration 配置		1 × 6.5", 2-way 单6.5, 2分频	1 × 8", 2-way 单8, 2分频	1 × 10", 2-way 单10, 2分频	1 × 12", 2-way 单12, 2分频
Drivers 单元组成	LF	165 mm (6.5") driver 低音喇叭	203 mm (8") driver 低音喇叭	254 mm (10") driver 低音喇叭	305 mm (12") driver 低音喇叭
	HF	25 mm voice coil 高音喇叭	34 mm voice coil 高音喇叭	HF - 34 mm voice coil 高音喇叭	44 mm voice coil 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		180W/720W	280W/1120W	330W/1320W	400W/1600W
Recommended AMP Power 推荐功放		300W	400W	500W	600W
Nominal Impedance 标称阻抗		8Ω	8Ω	8Ω	8Ω
Frequency Range 频率范围		80Hz-18KHz(±3dB) 68Hz-20KHz(-10dB)	63Hz-18KHz(±3dB) 55Hz-20KHz(-10dB)	65Hz-18KHz(±3dB) 58Hz-20KHz(-10dB)	55Hz-18KHz(±3dB) 46Hz-20kHz(-10dB)
Sensitivity(1m/1W) 灵敏度		92dB	93dB	94dB	95dB
MAX SPL 最大声压级		121dB	123dB	125dB	127dB
Enclosure material 箱体板材		High Density Board 高密度板			
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆			
Dimension (W×D×H) 产品尺寸		218×268×336mm	218×268×513mm	325×383×520mm	380×486×624mm
Net Weight(Kg) 产品净重		8	13	19	26

无 源 专 业 音 箱

TX

Passive Professional Speaker

General Specifications

Model		TX-15	TX-215	TX-12M	TX-18B	TX-218B
Description 描述		Loudspeaker 音箱	Loudspeaker 音箱	Stage Monitor 舞台监听	Subwoofer 超低频扬声器	Subwoofer 超低频扬声器
Configuration 配置		1 × 15", 2-way 单15, 2分频	2 × 15", 2-way 双15, 2分频	1 × 12", 2-way 单12, 2分频	1 × 18",1-way 单18, 1分频	2 × 18",1-way 双18, 1分频
Drivers 单元组成	LF	381 mm (15") driver 低音喇叭	381 mm (15") driver 低音喇叭	305 mm (12") driver 低音喇叭	457 mm (18") driver 低音喇叭	457 mm (18") driver 低音喇叭
	HF	44 mm voice coil 高音喇叭	75 mm voice coil 高音喇叭	44 mm voice coil 高音喇叭	/	/
Power Capacity: Continuous/Peak 功率：额定/峰值		450W/1800W	800W/3200W	400W/1600W	650W/2600W	1200W/4800W
Recommended AMP Power 推荐功放（@8Ω）		800W	1000W	600W	1000W	1200W
Nominal Impedance 标称阻抗		8Ω	4Ω	8Ω	8Ω	4Ω
Frequency Range 频率范围		50Hz-18KHz(±3dB) 42Hz-20KHz(-10dB)	40Hz-18KHz(±3dB) 35Hz-20KHz(-10dB)	55Hz-18KHz(±3dB) 46Hz-20KHz(-10dB)	36Hz-200Hz(±3dB) 30Hz-300Hz(-10dB)	35Hz-200Hz(±3dB) 30Hz-300Hz(-10dB)
Sensitivity(1m/1W) 灵敏度		96dB	100dB	95dB	97dB	100dB
MAX SPL 最大声压级		128dB	135dB	127dB	131dB	137dB
Enclosure material 箱体板材		High Density Board 高密度板			Birch Plywood 桦木夹板	
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆				
Dimension (W×D×H) 产品尺寸		548×436×705mm	498×620×1240mm	526×613×323mm	505×762×595mm	1130×760×555mm
Net Weight(Kg) 产品净重		34	65	26	42	81

VS 无源专业音箱

Passive Professional Speaker

Feature

The VS Series compact loudspeakers are to meet the needs of a broad range of installation requirements & touring application, at affordable price points, is truly unmatched. Venues such as nightclubs, cafes, discotheques, houses of worship, auditoriums, lecture halls, restaurants, theatres, and almost anywhere else that people gather to enjoy music or hear the spoken word, are within the ability of the VS Series to respond with acoustical perfection.

VS excels in applications that require controlled coverage patterns, high-impact power response, and intelligible sonic output. VS loudspeakers are flexible, easy to install, and most importantly, they provide excellent sound quality.

产品描述

VS系列是紧凑型音箱系列，是为了满足广泛的安装要求和巡回应用的需求，因此在声音处理上力求音色平衡并追求高性价比。VS系列是内置二分频扬声器，单元的材料配置及声学参数是根据VS系列的产品定位量身定制，从而实现了超高的性价比。

VS擅长于需要控制覆盖模式、高冲击功率响应和稳定的声音输出的应用。便于各场景的安装需求。

适用范围：包括现场演出、酒吧和舞厅、KTV、多功能厅礼堂、学校、咖啡馆、剧院等场景的扩声。

General Specifications

Model		VS-8008	VS-8010	VS-8012	VS-8015	VS-8025	VS-8012M
Description 描述		Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱	Stage Monitor 舞台监听
Configuration 配置		1 × 8", 2-way 单8, 2分频	1 × 10", 2-way 单10, 2分频	1 × 12", 2-way 单12, 2分频	1 × 15", 2-way 单15, 2分频	2 × 15", 2-way 双15, 2分频	1 × 12", 2-way 单12, 2分频
Drivers 单元组成	LF	203 mm (8") driver 低音喇叭	254 mm (10") driver 低音喇叭	305 mm (12") driver 低音喇叭	381 mm (15") driver 低音喇叭	381 mm (15") driver 低音喇叭	305 mm (12") driver 低音喇叭
	HF	25 mm voice coil 高音喇叭	25 mm voice coil 高音喇叭	34 mm voice coil 高音喇叭	34 mm voice coil 高音喇叭	44 mm voice coil 高音喇叭	34 mm voice coil 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		150W/600W	200W/800W	250W/1000W	300W/1200W	600W/2400W	250W/1000W
Recommended AMP Power 推荐功放（@8Ω）		300W	400W	500W	600W	1200W	500W
Nominal Impedance 标称阻抗		8Ω	8Ω	8Ω	8Ω	4Ω	8Ω
Frequency Range 频率范围		85Hz-20KHz(±3dB) 73Hz-20KHz(-10dB)	90Hz-20KHz(±3dB) 76Hz-20KHz(-10dB)	85Hz-20KHz(±3dB) 73Hz-20KHz(-10dB)	75Hz-20KHz(±3dB) 65Hz-20KHz(-10dB)	50Hz-20KHz(±3dB) 44Hz-20KHz(-10dB)	85Hz-20KHz(±3dB) 73Hz-20KHz(-10dB)
Sensitivity(1m/1W) 灵敏度		90dB	93dB	94dB	95dB	99dB	94dB
MAX SPL 最大声压级		118dB	122dB	124dB	126dB	133dB	124dB
Enclosure material 箱体板材		High Density Board 高密度板					
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆					
Dimension (W×D×H) 产品尺寸		256×261×401mm	313×321×497mm	369×400×636mm	438×470×710mm	465×520×1161mm	369×400×636mm
Net Weight(Kg) 产品净重		10	14	22	29	55	22

POW 无源专业音箱

Passive Professional Speaker

Feature

POW-825 is a medium and long-range 3-way double 15" loudspeaker with built-in crossover. In order to enhance the sound field penetration speed and engineering installation, POW has been designed and developed reasonably on the unit horn and the box. The analysis is extremely high,the penetrating power of the middle and high sounds is extremely strong and the MAX SPL is amazing. The far-reaching projection distance and explosive ultra-low frequency speakers are used together to make the sound replay evenly in every corner. It is the first choice for outdoor performances and stadium sound reinforcement equipment.

产品描述

POW-825 是三分频双15寸中远程户外音箱。 为了提高声场穿透速度和工程安装便利，POW-825在单元号角和箱体上做了合理的设计和开发。声音分析极高，中高音的穿透力极强，声压级很棒。 广泛的投射距离和爆炸性超低频扬声器一起使用，可以使声音在每个角落均等地重放。 这是户外表演和体育场扩声设备的首选。

Feature

POW-221B dual 21" Subwoofer with the complex horn structure, two newly designed 21" low frequency powerful driver, 135mm voice coil diameter and maximum amplitude 70mm, ensure a high level of distortion-free bass. The special cabinet design ensures a high level of long-distance projection and low power compression application.

产品描述

POW-221B双21寸超低音炮，复杂的号角结构，以及两个最新设计的21”低音，135mm音圈直径和最大幅度70mm，确保高水准无失真的低音，特别的箱体设计，保证了远距离投射和低功率压缩的高水平应用。

General Specifications

Model		POW-221B	POW-825
Description 描述		Subwoofer 低音炮	Loudspeaker 音箱
Configuration 配置		2 × 21", 1 way 双21寸, 1分频	2 × 15", 3-way 双15寸, 3分频
Drivers 单元组成	LF	2 × 21" 低音喇叭	2 × 15" 低音喇叭
	HF	/	1 × 2.85" 高音喇叭
	MF	/	1 × 8" 中音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		2400W / 8000W	1000W / 3200W
Recommended AMP Power 推荐功放（@8Ω）		2600W	1500W
Frequency Range 频率范围		30Hz-200Hz	40Hz-20KHz
Nominal Impedance 标称阻抗		4Ω	4Ω
Sensitivity(1m/1W) 灵敏度		106dB	104dB
MAX SPL 最大声压级		142dB	134dB
Enclosure material 箱体板材		Birch Plywood 桦木夹板	
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆	
Dimension (W×D×H) 产品尺寸		1300×905×628mm	500×600×1310mm
Net Weight(Kg) 产品净重		130	69

POW 无源专业音箱

Passive Professional Speaker

Feature

POW is a medium and long-range loudspeaker with built-in crossover and external electronic crossover. In order to enhance the sound field penetration speed and engineering installation, POW has been designed and developed reasonably on the unit horn and the box. The analysis is extremely high, the penetrating power of the middle and high sounds is extremely strong and the MAX SPL is amazing. The far-reaching projection distance and explosive ultra-low frequency speakers are used together to make the sound replay evenly in every corner. It is the first choice for outdoor performances and stadium sound reinforcement equipment.

产品描述

POW系列是户外中远程的音箱，高声压，大功率，远射程。POW采用定制的高性能高频和低频单元，单元材料配置及声学参数是根据POW系列的箱体结构及号角量身定制，从而更好得发出产品的性能。特制的超大玻璃钢扩声号角，保证了POW系列的覆盖角度延展更大，更远。POW系列为了提高声场穿透速度和工程安装，对单元喇叭和箱体进行了合理的设计和开发。分析非常高，中高音的穿透能力非常强，最大声压级是惊人的。远距离的使用与爆发性的超低频扬声器结合使用，使声音在各个角落均匀重放。是户外表演、体育场扩声设备的首选。

General Specifications

Model		POW-126	POW-128	POW-18S	POW-218S	POW-223
Description 描述		Loudspeaker 音箱	Loudspeaker 音箱	Subwoofer 超低频扬声器	Subwoofer 超低频扬声器	Loudspeaker 音箱
Configuration 配置		1×15", 3-way 单15, 3分频	1×15", 3-way 单15, 3分频	1×18",1-way 单18, 1分频	2×18",1-way 双18, 1分频	2×15", 3-way 双15, 3分频
Drivers 单元组成	LF	1×15" 低音喇叭	1×15" 低音喇叭	1×18" 低音喇叭	2×18" 低音喇叭	2×15" 低音喇叭
	HF	1×2.85" 高音喇叭	1×1.75" 高音喇叭	/	/	1×1.75" 高音喇叭
	MF	1×6.5" 中音喇叭	1×8" 中音喇叭	/	/	1×6.5" 中音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		450W/1800W	450W/1800W	500W/2000W	1000W/4000W	800W/3200W
Recommended AMP Power 推荐功放		700W	750W	1000W	1500W	1200W
Nominal Impedance 标称阻抗		8Ω	8Ω	8Ω	4Ω	4Ω
Frequency Range 频率范围		40Hz-18KHz	40Hz-18KHz	40Hz-200Hz	40Hz-250Hz	38Hz-20KHz
Sensitivity(1m/1W) 灵敏度		98dB	98dB	102dB	105dB	104dB
MAX SPL 最大声压级		128dB	128dB	136dB	142dB	136dB
Enclosure material 箱体板材		Birch Plywood 桦木夹板	Birch Plywood 桦木夹板	Birch Plywood 桦木夹板	Birch Plywood 桦木夹板	High Density Board 高密度板
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆	Rugged tour-grade textured paint 黑色水性漆	Rugged tour-grade textured paint 黑色水性漆	Rugged tour-grade textured paint 黑色水性漆	Rugged tour-grade textured paint 黑色水性漆
Dimension (W×D×H) 产品尺寸		548×592×920mm	550×600×911mm	580×762×488mm	990×762×560mm	518×680×1242mm
Net Weight(Kg) 产品净重		56	51	42	80	73

General Specifications

Model		POW-225	POW-226	POW-228	POW-315	POW-328
Description 描述		Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱	Loudspeaker 音箱
Configuration 配置		2×15", 3-way 双15, 3分频	2×15", 3-way 双15, 3分频	2×15", 3-way 双15, 3分频	2×15", 3-way 双15, 3分频	2×18", 2-way 双18, 2分频
Drivers 单元组成	LF	2×15" 低音喇叭	2×15" 低音喇叭	2×15" 低音喇叭	2×15" 低音喇叭	2×18" 低音喇叭
	HF	2×1.755" 高音喇叭	1×2.85" 高音喇叭	1×1.75" 高音喇叭	1×3" 高音喇叭	1×3" 高音喇叭
	MF	/	1×8" 中音喇叭	1×8" 中音喇叭	1×6.5" 中音喇叭	/
Power Capacity: Continuous/Peak 功率：额定/峰值		800W/3200W	1000W/3200W	900W/3200W	1200W/4800W	1200W/4800W
Recommended AMP Power 推荐功放		1200W	1500W	1350W	1800W	1800W
Nominal Impedance 标称阻抗		4Ω	4Ω	4Ω	4Ω	4Ω
Frequency Range 频率范围		40Hz-18KHz	40Hz-20KHz	40Hz-20KHz	35Hz-20KHz	35Hz-20KHz
Sensitivity(1m/1W) 灵敏度		100dB	104dB	102dB	110dB	112dB
MAX SPL 最大声压级		134dB	138dB	136dB	140dB	142dB
Enclosure material 箱体板材		High Density Board 高密度板	High Density Board 高密度板	High Density Board 高密度板	High Density Board 高密度板	High Density Board 高密度板
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆	Rugged tour-grade textured paint 黑色水性漆	Rugged tour-grade textured paint 黑色水性漆	Rugged tour-grade textured paint 黑色水性漆	Rugged tour-grade textured paint 黑色水性漆
Dimension (W×D×H) 产品尺寸		548×592×1253mm	548×592×1355mm	550×600×1324mm	680×518×1004mm	620×597×1522mm
Net Weight(Kg) 产品净重		60	79	69	97	92

NB KTV包房箱 NB系列

KTV Speaker NB series

Feature

NB series products are tailor-made for KTV and entertainment clubs, using high-quality high-power woofer unit, the treble is natural and round, the middle frequency is clear and soft, and the middle frequency is clear and soft. The performance is particularly outstanding, and the sound quality is pure and delicate. It is an ideal speaker system for singing in KTV clubs.

产品描述

NB系列产品专为KTV、娱乐会所量身打造，采用高品质大功率低音喇叭单元，高音自然圆润，中频清晰柔和极富磁性，低频饱满厚实，频响范围极宽，整体听感柔和，人声表现尤为突出，音质纯净细腻，是KTV会所唱歌的理想扬声器系统。

General Specifications

Model		NB-1003	NB-1203
Description 描述		KTV Speaker KTV音箱	KTV Speaker KTV音箱
Configuration 配置		1×10", 3-way 单10寸, 3分频	1×12", 3-way 单12寸, 3分频
Drivers 单元组成	LF	1×10" 1×10" 低音喇叭	1×12" 1×12" 低音喇叭
	MF	2×4.5" 2×4.5"中音喇叭	2×4.5" 2×4.5"中音喇叭
	HF	2×2.5" 2×2.5" 高音喇叭	2×2.5" 2×2.5" 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		200W/600W	200W/800W
Recommended AMP Power 推荐功放（@8Ω）		250W	250W
Nominal Impedance 标称阻抗		8Ω	8Ω
Frequency Range 频率范围		60Hz-20KHz	50Hz-20KHz
Sensitivity(1W/1m) 灵敏度		94dB	95dB
MAX SPL 最大声压级		115dB	117dB
Enclosure material 箱体板材		High Density Board 高密度板	
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆	
Dimension (W×D×H) 产品尺寸		512×277×305mm	613×358×360mm
Net Weight(Kg) 产品净重		12	19

K KTV包房箱 K系列

KTV Speaker K Series

Feature

The K series are two-way full-frequency KTV private room speakers. The compact cabinet structure design and the strict selection of high-quality crossover components make the K series speakers achieve a high-fidelity acoustic restoration effect. Self-designed and moulded iron nets are fashionable and generous. The sound is soft, clear and natural, strong penetrating power, highly expressive color, and extremely cost-effective.

产品描述

K系列为两分频全频KTV包房音箱，紧凑的箱体结构设计，严苛选用优质分频器元器件，使得K系列音箱达到了高保真度的声学还原效果。自主设计，开模生产的铁网，时尚大方。声音柔和，清晰自然，穿透力强，极富表现色彩，具有极高的性价比。

General Specifications

Model		K-8	K-10
Description 描述		KTV Speaker KTV音箱	KTV Speaker KTV音箱
Configuration 配置		1×8", 2-way 单8, 2分频	1×10", 2-way 单10, 2分频
Drivers 单元组成	LF	1×8" 1×8" 低音喇叭	1×10" 1×10" 低音喇叭
	MF	/	/
	HF	2×3", 13 mm voice coil 2×3", 13 芯 高音喇叭	2×3", 13 mm voice coil 2×3", 13 芯 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		150W/600W	200W/800W
Recommended AMP Power 推荐功放		200W	250W
Nominal Impedance 标称阻抗		8Ω	8Ω
Frequency Range 轴向频率响应		45Hz-20KHz	50Hz-20KHz
Sensitivity(1W/1m) 灵敏度		97dB	97dB
MAX SPL 最大声压级		118dB	118dB
Enclosure material 箱体板材		High Density Board 高密度板	High Density Board 高密度板
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆	Rugged tour-grade textured paint 黑色水性漆
Dimension (W×D×H) 产品尺寸		265×452×252mm	275×507×292mm
Net Weight(Kg) 产品净重		8	12

AXDSP 有源专业音箱

Active Professional Speaker

Feature

The AX Series represents the fashion active loudspeaker for today's demanding audio professionals. The perfect combination of elegant design, superior audio performance, high functionality, simple and intuitive operation, and genuine reliability, AX delivers extraordinary results for users in both portable and installed applications.

The series can be widely used in large-scale stages, theaters, parties and other occasions. The hanging points on the cabinets allow the speakers to be freely mounted on various situations.

产品描述

AX系列是当今对有源音箱要求苛刻的音频专业人士使用的代表。AX完美结合了优雅的设计，出色的音频性能，简单直观的操作以及真正的可靠性，AX系列在便携式使用和规定安装应用中为用户提供了非凡的效果。

AX系列可广泛应用于大型舞台、剧院、派对等场合。机柜上的悬挂点允许音箱在各种情况下自由安装。

General Specifications

Model		AX-10DSP	AX-12DSP
Description 描述		Active Multi-fonction Speaker 有源多功能音箱	Active Multi-fonction Speaker 有源多功能音箱
Configuration 配置		1×10", 2-way 单10, 2分频	1×12", 2-way 单12, 2分频
Drivers 单元组成	LF	1×10" 1×10" 低音喇叭	1×12" 1×12" 低音喇叭
	HF	34 mm voice coil 34芯 高音喇叭	44 mm voice coil 44芯 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		200W/800W	250W/1000W
Frequency Range 频率范围		80Hz-18KHz	70Hz-18KHz
Sensitivity(1m/1W) 灵敏度		94dB	96dB
MAX SPL 最大声压级		123dB	126dB
LF Amplifier Module 低音功放模块		Class D	
LF Amplifier Power 低音功放功率		400W@4Ω	
LF Distortion 失真		<0.1%	
HF Amplifier Module 高音功放模块		Class D	
HF Amplifier Power 高音功放功率		100W@8Ω	
HF Distortion 失真		<0.1%	
Enclosure material 箱体板材		High Density Board 高密度板	
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆	
Dimension (WxDxH) 产品尺寸		330×300×520mm	390×360×620mm
Net Weight(Kg) 产品净重		13	21

TXDSP 有源专业音箱

Active Professional Speaker

Feature

The TX Series represents the fashion active loudspeaker for today's demanding audio professionals. The perfect combination of elegant design, superior audio performance, high functionality, simple and intuitive operation, and genuine reliability, TX delivers extraordinary results for users in both portable and installed applications.

The series can be widely used in large-scale stages, theaters, parties and other occasions. The hanging points on the cabinets allow the speakers to be freely mounted on various situations.

产品描述

TX系列是当今对有源音箱要求苛刻的音频专业人士使用的代表。 TX完美结合了优雅的设计，出色的音频性能，简单直观的操作以及真正的可靠性，TX系列在便携式使用和规定安装应用中为用户提供了非凡的效果。

TX系列可广泛应用于大型舞台、剧院、派对等场合。机柜上的悬挂点允许音箱在各种情况下自由安装。

General Specifications

Model		TX-10DSP	TX-12DSP	TX-12M-DSP
Description 描述		Loudspeaker 音箱	Loudspeaker 音箱	Stage Monitor 舞台监听
Configuration 配置		1×10", 2-way 单10, 2分频	1×12", 2-way 单12, 2分频	1×12", 2-way 单12, 2分频
Drivers 单元组成	LF	254 mm (10") driver 低音喇叭	305 mm (12") driver 低音喇叭	305 mm (12") driver 低音喇叭
	HF	34 mm voice coil 34芯 高音喇叭	44 mm voice coil 44芯 高音喇叭	44 mm voice coil 44芯 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		200W/1320W	250W/1600W	250W/1600W
Frequency Range 频率范围		80Hz-18KHz(±3dB) 75Hz-20KHz(-10dB)	70Hz-18KHz(±3dB) 65Hz-20KHz(-10dB)	70Hz-18KHz(±3dB) 65Hz-20KHz(-10dB)
Sensitivity(1W/1m) 灵敏度		94dB	96dB	96dB
MAX SPL 最大声压级		123dB	126dB	126dB
LF Amplifier Module 低音功放模块		Class D		
LF Amplifier Power 低音功放功率		250W@8ohms		
Distortion 失真		<0.1%		
HF Amplifier Module 高音功放模块		Class D		
HF Amplifier Power 高音功放功率		100W@8ohms		
Distortion 失真		<0.1%		
Enclosure material 箱体板材		High Density Board 高密度板		
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆		
Dimension (WxDxH) 产品尺寸		325×383×520mm	380×486×624mm	526×613×323mm
Net Weight(Kg) 产品净重		20	27	28

KL 娱乐箱 KL系列

KTV Speaker KL Series

Feature

KL series is faced in the middle and high end entertainment market. KL series is produced with modern production technology, has a fashion design. The unique rear-inverted double-out design perfectly solves the problem of insufficient low frequency caused by the prohibition of the installation of subwoofers in KTV places. KL series is convenient and quick to install, it can be mounted on the wall or stood on the floor with a support rod. The KL series is suitable for sound reinforcement in dining bars and restaurants, KTVs, multi-function halls, conference rooms, small auditoriums, school classrooms and other scenes.

产品描述

KL系列定位于中高端娱乐市场应用，全系列产品采用现代生产工艺、拥有时尚前卫的外观设计，独特的后倒相双出设计，完美解决了KTV场所不允许安装超低音箱导致的低频不足问题，KL系列安装方便快捷，可贴墙吊装或落地支撑杆安装。

KL系列适用于休闲餐吧、KTV、多功能厅、会议室、小礼堂、学校电教室等场景扩声。

General Specifications

Model		KL-10	KL-12	KL-4012
Description 描述		KTV Speaker 娱乐后倒音箱	KTV Speaker 娱乐后倒音箱	KTV Speaker 娱乐后倒音箱
Configuration 配置		1×10", 2-way 单10寸, 2分频	1×12", 2-way 单12寸, 2分频	1×12", 2-way 单12寸, 2分频
Drivers 单元组成	LF	256 mm (10") driver" 1×10" 低音喇叭	304 mm (12") driver" 1×12" 低音喇叭	304 mm (12") driver" 1×12" 低音喇叭
	HF	HF - 34 mm voice coil 34芯 高音喇叭	HF - 44 mm voice coil 44芯 高音喇叭	HF - 34 mm voice coil 34芯 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		200W/800W	300W/1200W	350W/1400W
Nominal Impedance 标称阻抗		8Ω	8Ω	8Ω
Frequency Range 频率范围		70Hz-18KHz	65Hz-18KHz	58Hz-18KHz
Sensitivity(1W/1m) 灵敏度		94dB	96dB	96dB
MAX SPL 最大声压级		117dB	120dB	121dB
Enclosure material 箱体板材		High Density Board 高密度板		High Quality Birch Plywood 桦木夹板
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆		
Dimension (WxDxH) 产品尺寸		308×345×520mm	369×410×595mm	369×410×595mm
Net Weight(Kg) 产品净重		14.5	21	22

TR 高端专业音箱 TR系列

Passive Speaker TR series

Feature

The TR series is developed using advanced electro-acoustic design concepts. Its ultimate performance meets the needs of high-level sound reinforcement. At the same time, the birth of the TR series also demonstrates EGT audio's pursuit of the ultimate sound. EGT's specially customized frequency divider efficiently ensures the seamless combination of crossover points, making the entire sound density high, stable, beautiful, and delicate. The TR series speakers release exciting dynamics, with ultra-precise coverage angles, polar distortion units, and ultra-high sound pressure level output. Once launched, TR series, have been widely praised by the market.

产品描述

TR系列是运用先进的电声设计理念开发而成，其极致表现满足了高级别的扩声需求，同时TR系列的诞生也彰显了EGT audio对极致好声音的追求。EGT特别定制的分频器高效保证了分频点的无缝结合，使得整个声音密度高，平稳，优美，细腻。TR系列音箱放出令人兴奋的动态，超精准的覆盖角度、极地的失真单元、超高声压级输出，一经推出便受到市场的广泛推崇。

General Specifications

Model		TR-12
Description 描述		Passive Speaker 专业演出箱
Configuration 配置		1×12", 2-way 单12寸, 2分频
Drivers 单元组成	LF	304 mm (12") driver" 1×12" 低音喇叭
	HF	44 mm voice coil 44芯 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		350W/1400W
Nominal Impedance 标称阻抗		8Ω
Frequency Range 频率范围		45Hz-19KHz
Sensitivity(1W/1m) 灵敏度		99dB
MAX SPL 最大声压级		129dB
Enclosure material 箱体板材		High Quality Birch Plywood 桦木夹板
Finish 表面处理		Rugged tour-grade textured paint 黑色水性油漆
Dimension (WxDxH) 产品尺寸		360×400×599mm
Net Weight(Kg) 产品净重		22

RXDSP 有源专业音箱

Active Professional Speaker

Feature

The RX Series represents the fashion active loudspeaker for today's demanding audio professionals. The perfect combination of elegant design, superior audio performance, high functionality, simple and intuitive operation, and genuine reliability, RX delivers extraordinary results for users in both portable and installed applications.

The series can be widely used in large-scale stages, theaters, parties and other occasions. The hanging points on the cabinets allow the speakers to be freely mounted on various situations.

产品描述

RX系列是当今对有源音箱要求苛刻的音频专业人士使用的代表。RX完美结合了优雅的设计，出色的音频性能，简单直观的操作以及真正的可靠性，RX系列在便携式使用和规定安装应用中为用户提供了非凡的效果。

RX系列可广泛应用于大型舞台、剧院、派对等场合。机柜上的悬挂点允许音箱在各种情况下自由安装。

General Specifications

Model		RX-112M	RX-115M
Description 描述		Active stage monitor 有源舞台监听	Active stage monitor 有源舞台监听
Configuration 配置		1 × 12", 2-way 单12, 2分频	1 × 15", 2-way 单15, 2分频
Drivers 单元组成	LF	1 x 12" 1 × 12" 低音喇叭	1 × 15" 1 × 15" 低音喇叭
	HF	44 mm voice coil 44芯 高音喇叭	44 mm voice coil 44芯 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		350W/1400W	400W/1600W
Frequency Range 频率范围		55Hz-19KHz	45Hz-19KHz
Sensitivity(1m/1W) 灵敏度		97dB	98dB
MAX SPL 最大声压级		122dB	124dB
LF Amplifier Module 低音功放模块		Class D	
LF Amplifier Power 低音功放功率		650W@4Ω	
LF Distortion 失真		<0.05%	
HF Amplifier Module 高音功放模块		Class D	
HF Amplifier Power 高音功放功率		100W@8Ω	
HF Distortion 失真		<0.05%	
Enclosure material 箱体板材		Birch Plywood 桦木夹板	
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆	
Dimension (WxDxH) 产品尺寸		375×410×570mm	420×440×640mm
Net Weight(Kg) 产品净重		20	23

CL4H 有源音柱音响组合

Active Column Conference Speaker Set

Feature

CL4H+LT-15B-DSP system is a compact multi-purpose active DSP column system consisting of a passive full-range column speaker and an active DSP controlled 15" subwoofer.
With elaborate acoustic design, same drives in the cabinet work as one integrative full range speaker system, which can achieve perfect joint of frequency response and excellent sound performace. CL4H can meet the applications in different venues and complex space.
LT-15B-DSP is an active DSP controlled compact subwoofer with 15" customized EGT drivers and Class D amplifier module. The system works efficiently.
LT-15B-DSP has been carefully tested. By coupling the system continually and overlaying the resonances, the LF efficiency is improved significantly.
CL4H+LT-15B-DSP is a plug and play column system with easy set up. The presets are made with a lot of testing. The system can be put in various applications. Optional combination could be matched with GF series.

产品描述

CL4H+LT-15B-DSP是一个紧凑的多用途有源DSP音柱系统，由一个无源全频音程柱扬声器和一个有源DSP控制的15英寸低音炮组成。以满足不同的中小型场所的使用需求。通过精心的声学设计，箱体内的相同驱动器作为一个一体化的全音域扬声器系统工作，可以实现完美的频率响应和优良的声音性能的结合。CL4H可以满足不同场所和复杂空间的单独应用。无论是固定安装在室内场所或用于中小型演出都能让人眼前一亮。
LT-15B-DSP是一款有源DSP控制的小型低音炮，带有15英寸定制的EGT驱动器和D类放大器模块。在使用中拥有很好的超低音输出。
LT-15B-DSP经过仔细测试。通过系统的连续耦合和共振叠加，大大提高了低频效率。
CL4H+LT-15B-DSP是一种即插即用的立柱系统，易于设置。这些预设是经过大量测试的。该系统可应用于各种场合。可选配GF系列。

General Specifications

Model		CL4H	LT-15B-DSP
Description 描述		Coloum Speaker 音柱音箱	Subwoofer 有源低音炮
Configuration 配置		4 × 3", 1-way, 4 × 3寸，1分频	1 × 15", 1-way, 1 × 15寸，1分频
Drivers 单元组成	LF	55 mm (3") driver 低音喇叭	381 mm (15") driver 低音喇叭
	HF	HF - 4 plane wave high frequency drive units 四个平面波高音喇叭	/
Power Capacity: Continuous/Peak 功率：额定/峰值		100W/400W	400W/1600W
Nominal Impedance 标称阻抗		8Ω	4Ω
Frequency Range 频率范围		105Hz-18KHz(±3dB) 95Hz-20KHz(-10dB)	37Hz-130Hz(±3dB) 34Hz-165Hz(-10dB)
Sensitivity(1W/1m) 灵敏度		88dB	96dB
MAX SPL 最大声压级		114dB	122dB
LF Amplifier Module 低音功放模块		/	Power Switch
LF Amplifier Power 低音功放功率		/	600W@8ohms
Distortion 失真		/	<0.1%
HF Amplifier Module 高音功放模块		/	Power Switch
HF Amplifier Power 高音功放功率		/	100W@8ohms
Distortion 失真		/	<0.1%
Enclosure material 箱体板材		High Density Board 高密度板	Birch Plywood 桦木夹板
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆	
Dimension (WxDxH) 产品尺寸		100×130×505mm	440×620×670mm
Net Weight(Kg) 产品净重		5	34

R 柱形会议音箱R系列

Column Conference Speaker R Seires

Feature

The R series is a columnar array loudspeaker, which is mainly designed to restore life in a fixed installation system. The R series sound beam pointing controllable technology has raised the expressive power of direct students to a completely new level. With the small and slender cabinet mechanism and rigorous appearance design of the R series, it redefines the high-quality speech sound reinforcement installation solution, which is especially suitable for Used in airports, conference centers, religious places, shopping centers, etc.

产品描述

R系列是柱形阵列扬声器，主要是为了固定安装系统中还原人生而设计。R系列声波束指向可控技术把直达生的表现力提升到了完全崭新的层次，配合R系列小巧修长的箱体机构和严谨的外观设计，重新定义了高质量语言扩声安装解决方案，特别适合机场、会议中心、宗教场所、购物中心等使用。

General Specifications

Model		R-240	R-241	R-440
Description 描述		Conference Speaker 会议音箱	Conference Speaker 会议音箱	Conference Speaker 会议音箱
Configuration 配置		2 × 4.5", 1 way 双4.5寸，1分频	2 × 4.5", 2 way 双4.5寸，2分频	4 × 4.5", 1 way 4 × 4.5寸，1分频
Drivers 单元组成	LF	2 × 4.5" 低音喇叭	2 × 4.5" 低音喇叭	4 × 4.5" 低音喇叭
	HF	/	1 × 3" 高音喇叭	/
Power Capacity: Continuous/Peak 功率：额定/峰值		100W / 400W	100W / 400W	200W / 800W
Recommended AMP Power 推荐功放（@8Ω）		150W	150W	300W
Nominal Impedance 标称阻抗		8Ω	8Ω	8Ω
Frequency Range 频率范围		120Hz ~ 16KHz	120Hz ~ 20KHz	100Hz ~ 18KHz
Sensitivity(1W/1m) 灵敏度		90dB	90dB	91dB
MAX SPL 最大声压级		110dB	110dB	114dB
Enclosure material 箱体板材		High Density Board 高密度板		
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆		
Dimension (WxDxH) 产品尺寸		150×180×290 mm	150×180×360 mm	150×180×622 mm
Net Weight(Kg) 产品净重		4	5	9

FX 同轴会议音箱FX系列

Coaxial Conference Speaker

Feature

The FX series is a voice speaker designed for various large, medium and small meeting rooms, classrooms and other public places. The use of a high-precision frequency crossover system ensures clear, full voice and original sound playback. The FX series conference speakers have strong voice penetration, and the specially designed crossover point reduces the howling point.
The FX series is easy and quick to install. The self-designed U-shaped hanger is safe and reliable. It can be mounted on the wall or on the ceiling, and can also be supported by a floor stand.
The FX series is a high-quality professional speaker specially designed for conference rooms. Its exquisite appearance and good sound quality can bring customers a refreshing feeling.

产品描述

FX系列是针对各种大、中、小会议室、课室等公共场合设计的语音音箱。运用高精度的分频系统确保语音清晰、饱满、原音播放，FX系列会议音箱播放的语音穿透力强，特殊设计的分频点使啸叫点降低。
FX系列安装方便快捷，自主设计的U型吊挂件安全可靠，可贴墙挂装或天花板上吊装，亦可用落地支架支撑安装。
FX系列是专门为会议室设计的高品质专业音箱，其精致的外观，良好的音质都能给客户带来耳目一新的感觉。

选配 Optional

General Specifications

Model		FX-8	FX-10	FX-12
Description 描述		Coaxial Loudspeaker 同轴音箱	Coaxial Loudspeaker 同轴音箱	Coaxial Loudspeaker 同轴音箱
Configuration 配置		1 × 8", 2-way 单8, 2分频	1 × 10", 2-way 单10, 2分频	1 × 12", 2-way 单12, 2分频
Drivers 单元组成	LF	203 mm (8") driver 1 × 8" 203芯 低音喇叭	254 mm (10") driver 1 × 10" 254芯 低音喇叭	305 mm (12") driver 1 × 12" 305芯 低音喇叭
	HF	34 mm voice coil 34芯 高音喇叭	34 mm voice coil 34芯 高音喇叭	38 mm voice coil 38芯 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		100W/400W	200W/800W	250W/1000W
Recommended AMP Power 推荐功放（@8Ω）		150W	300W	400W
Nominal Impedance 标称阻抗		8Ω	8Ω	8Ω
Frequency Range 频率范围		80Hz-20KHz	70Hz-20KHz	60Hz-20KHz
Sensitivity(1m/1W) 灵敏度		94dB	96dB	98dB
MAX SPL 最大声压级		114dB	119dB	122dB
Enclosure material 箱体板材		Birch Plywood 桦木夹板		
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆		
Dimension (W×D×H) 产品尺寸		292×281×412mm	336×326×472mm	382×354×554mm
Net Weight(Kg) 产品净重		11	16	21

RX 有源超低频音箱 RX系列

Active Subwoofer RX Series

Feature

RX series active subwoofer, equipped with an independent power amplifier and filter, has no additional requirements for the system, and is widely used in home cinema system and multi-functional meeting rooms. In the home cinema system, the RX series active subwoofer can effectively enhance the bass texture in the film, such as the power of a plane taking off, the energy and shock of a train or a bullet, and effectively enhance the audio-visual effect. Similarly, the RX series active subwoofer can also be used in multi-functional conference rooms. with a benefit of small size and flexible installation, It enhances the thickness of the human voice in the conference system. The RX series subwoofer can effectively make up for the lack of low frequency in the conference box in the multi-functional performing arts system. Restore a more realistic system Sound field texture.

产品描述

RX有源超低频音箱，箱内装有独立的功率放大器和滤波器，对系统无额外要求，广泛应用于家庭影K和多功能会议室。在影K系统中RX系列有源超低频音箱可有效提升影片中的低音质感，比如飞机起飞时的力量，火车或子弹的能量和震撼，有效的强化视听效果。同样，RX系列也可以应用于多功能会议室，体积小，安装灵活，在会议系统中增强了人声的浑厚度，RX系列在多功能演艺系统中能有效弥补会议箱中低频匮乏问题，从而还原更为真实的系统声场质感。

General Specifications

Model	RX-100B	RX-120B	RX-150B
Description 描述	Active Subwoofer 有源低音炮	Active Subwoofer 有源低音炮	Active Subwoofer 有源低音炮
Configuration 配置	1 × 10", 1-way 单10, 1分频	1 × 12", 1-way 单12, 1分频	1 × 15", 1-way 单15, 1分频
Drivers 单元组成	LF -1 × 10" 1 × 10" 低音喇叭	LF -1 × 12" 1 × 12" 低音喇叭	LF -1 × 15" 1 × 15" 低音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值	150W/600W	200W/800W	500W/2000W
Frequency Range 频率范围	38Hz～120Hz	40Hz～120Hz	32Hz～120Hz
Sensitivity(1m/1W) 灵敏度	85dB	86dB	94dB
MAX SPL 最大声压级	107dB	108dB	120dB
LF Amplifier Module 低音功放模块	Class D	Class D	Class D
LF Amplifier Power 低音功放功率	300W@4Ω	300W@4Ω	700W@4Ω
LF Distortion 失真	<0.05%		
Enclosure material 箱体板材	High Density Board 高密度板		
Finish 表面油漆	Rugged tour-grade textured paint 黑色水性油漆		
Dimension (WxDxH) 产品尺寸	312×347×432mm	380×430×495mm	430×510×559mm
Net Weight(Kg) 产品净重	19.5	27	47.5

CM 家庭影音系统 CM系列

Home Theater System CM Seires

Feature

CM series is suitable for high-end private theaters, clubs, villas, customized KTV entertainment rooms, etc. CM series is produced with modern production technology, has a fashion design. It is convenient and quick to install, can be mounted on the wall or stood on the floor with a support rod.
The CM series is flexible. The front speaker single 10" 2-Way and the surround speaker single 8" 2-Way can be interchanged to replace the front and surround roles according to the size of the venue. Large sound effects do not require a large size necessarily. The CM-C6 center speaker is used dual 6.5" units, which play an important role in highly restoring Dolby vocals, and making the dialogue is clearer and fuller. No matter where the audience is on any side of the room, they can feel the rich and delicate sound.
CM series home theater system can be paired with active subwoofer RX series(P27). The average power of the RX series active subwoofer can reach 300W-700W, to define the outstanding level of your theater system, and provide an immersive cinema sound effect experience, that makes you feel the shocking feeling of bullets passing through your ears and bombs by your side, just like watching a movie in a commercial cinema.

产品描述

家庭影音系统CM系列适用于高端私人影院、会所、别墅、家庭影K娱乐定制等场所。全系列产品采用现代生产工艺、拥有时尚前卫的外观设计，安装方便快捷，可贴墙挂装或落地支撑杆安装。

CM系列搭配灵活多变，前置单10"2-Way /环绕单8"2-Way音箱可根据场地面积大小不同，互换代替前置与环绕角色。大音效不一定需要大尺寸，外观纤薄，内在单元结构设计精心，呈现逼真场景与环绕声。CM-C6中置音箱采用双6.5"单元，在高度还原杜比人声中担当重要一员，对白更清晰饱满，无论观众身处房间任何一侧，都能感受丰富细腻的音质。

CM系列家庭影音系统可搭配有源超低频音箱RX系列使用（P27），RX系列有源低音炮，平均功率可达300W-700W，为您的影院系统保驾护航，提供身临其境的影院音效体验，让您感受子弹从耳边穿行，炸弹就在你身边的震撼包围感，如亲临电影现场。

General Specifications

Model		CM-10	CM-8	CM-C6
Description 描述		Main Speaker 主音箱	Surrond Speaker 环绕音箱	Center Speaker 中置音箱
Configuration 配置		1 × 10", 2-way 单10, 2分频	1 × 8", 2-way 单8, 2分频	2 × 6.5", 2-way 双6.5, 2分频
Drivers 单元组成	LF	1 × 10" 低音喇叭	1 × 8" 低音喇叭	2 × 6.5" 低音喇叭
	HF	1 × 1" 低音喇叭	1 × 1" 低音喇叭	1 × 1" 低音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		150W/600W	120W/480W	100W/400W
Nominal Impedance 标称阻抗		4Ω	6Ω	4Ω
Frequency Range 频率范围		51Hz-20KHz	48Hz-20KHz	90Hz-20KHz
Sensitivity(1W/1m) 灵敏度		91dB	90dB	92dB
Enclosure material 箱体板材		High Density Board 高密度板		
Finish 表面处理		Rugged tour-grade textured paint 黑色水性漆		
Dimension (WxDxH) 产品尺寸		328×231×465mm	288×215×408mm	579×194×202mm
Net Weight(Kg) 产品净重		12.5	10	11

HK 家庭影音系统 HK系列

Home Theater System HK Seires

■ General Specifications

Model	HK-8	HK-10	HK-M8	CM-S02+	CM-S2+
Description 描述	8" Home Theater Speaker 8寸影K音箱	10" Home Theater Speaker 10寸影K音箱	Dual 8" Home Theater Center Speaker 双8寸影K中置音箱	12" Home Theater Subwoofer 12寸低音炮音箱	12" Home Theater Active Subwoofer 12寸有源低音炮音箱
Configueation 配置	2-way, Bass-Reflex Enclosure 二分频 2单元 低音反射式		2-way, Bass-Closed Enclosure 二分频 3单元 低音密闭式	1-way, Bass-Reflex Enclosure 超低音 1单元 低音反射式	
LF driver 低音单元	1×8"	1×10"	2×8"	1×12"	1×12"
HF dirver 高音单元	1×1"	1×1"	1×1"	/	/
Nominal impedance 标称阻抗	6Ω	6Ω	8Ω	4Ω	/
Frequency response 频率响应	50Hz～20KHz	45Hz～20KHz	80Hz～20KHz	31Hz～120KHz	30Hz～120KHz
Sensitivity 灵敏度	88dB	90dB	90dB	86dB	86dB
Rated input power 额定输入功率	120W	150W	220W	200W	300W
Dimension(WxHxD)外观尺寸	291×470×181mm	323×523×181mm	291×611×181mm	380×442×474mm	380×442×474mm

SY 家庭影音系统 SY系列

Home Theater System SY Seires

■ General Specifications

Model	SY-4	SY-D4	SY-M4	SY-S01+	SY-S1+
Description 描述	4" Home Theater Surrond Speaker 4寸 影K环绕音箱	Dual 4" Home Theater Main Speaker 双4寸 影K主音箱	Dual 4" Home Theater Center Speaker 双4寸 影K中置音箱	10" Home Theater Subwoofer 10寸 低音炮音箱	10" Home Theater Active Subwoofer 10寸有源低音炮音箱
Configueation 配置	2-way, Bass-Reflex Enclosure 二分频低音反射-后出式		2-way, Bass-Reflex Enclosure 二分频中置低音反射-后出式	1-way, Bass-Reflex Enclosure 10"低音炮前出式倒相孔	
LF driver 低音单元	1×4"	2×4"	2×4"	1×10"	1×10"
HF dirver 高音单元	1×3/4"	1×3/4"	1×3/4"	/	/
Nominal impedance 标称阻抗	6Ω	6Ω	6Ω	4Ω	4Ω
Frequency response 频率响应	80Hz～20KHz	70Hz～20KHz	70Hz～20KHz	35Hz～500KHz	35Hz～500KHz
Sensitivity 灵敏度	85dB	85dB	85dB	85dB	85dB
Rated input power 额定输入功率	40W	70W	70W	150W	150W
Dimension(WxHxD)外观尺寸	136×213×142mm	270×350×142mm	270×200×1400mm	312×357×395mm	312×357×395mm

C 同轴多用途音箱 C05系列

Coaxial Multipurpose Speaker

Feature

The C05 series is developed using advanced electro-acoustic design concepts. Its ultimate performance meets the needs of high-level sound reinforcement. At the same time, the birth of the C05 series also demonstrates EGT audio's pursuit of the ultimate sound. EGT's specially customized frequency divider efficiently ensures the seamless combination of crossover points, making the entire sound density high, stable, beautiful, and delicate. The C05 series speakers release exciting dynamics, with ultra-precise coverage angles, polar distortion units, and ultra-high sound pressure level output. Once launched, C05 series, have been widely praised by the market.

产品描述

C05系列是运用先进的电声设计理念开发而成，其极致表现满足了高级别的扩声需求，同时C05系列的诞生也彰显了EGT audio对极致好声音的追求。EGT特别定制的分频器高效保证了分频点的无缝结合，使得整个声音密度高，平稳，优美，细腻。C05系列音箱放出令人兴奋的动态，超精准的覆盖角度、极地的失真单元、超高声压级输出，一经推出便受到市场的广泛推崇。

General Specifications

Model		C05
Description 描述		Coaxial Multipurpose Speaker 同轴多用途音箱
Configuration 配置		1×5.5", 2-way 单5.5寸, 2分频
Drivers 单元组成	LF	140 mm (5.5") driver" 1×5.5" 低音喇叭
	HF	38.5 mm voice coil 38.5芯 高音喇叭
Power Capacity: Continuous/Peak 功率：额定/峰值		100W/400W
Nominal Impedance 标称阻抗		8Ω
Frequency Range 频率范围		150Hz-20KHz
Sensitivity(1W/1m) 灵敏度		92dB
MAX SPL 最大声压级		110dB
Enclosure material 箱体板材		High Quality Birch Plywood 桦木夹板
Finish 表面处理		Rugged tour-grade textured paint 黑色水性耐磨油漆
Dimension (WxDxH) 产品尺寸		200×200×200mm
Net Weight(Kg) 产品净重		4.5

AK 功 放

Power Amplifier

Feature

1. Class H circuit is designed with a ring transformer, high-efficiency power conversion, and provides a continuous and stable power supply for the power amplifier;
2. The middle and high frequency are delicate, and the low frequency is flexible;
3. Each channel has their indepedent displaying light for Power, Signal, Overload and Protection;
4. Reasonable internal layout and efficient heat dissipation design, wind flow diversion system from front to back;
5. Optional stereo / parallel / bridge working mode;
6. Optional input sensitivity 0.775V / 1V / 1.414V;
7. Male and female XLR input connector, binding post and SPEAKON output connector;
8. Comprehensive heat dissipation protection, including soft start, DC protection, short circuit protection, overheating protection, anti-shock protection and amplitude limit protection;
9. Widely used in various sound reinforcement places.

产品描述

1. H类电路搭配纯铜环形变压器的设计，为功放提供持续稳定的功率；
2. 中高频细腻，低频富有弹性；
3. 每个通道带有电源、信号、过载和保护灯显示；
4. 从前到后的通风系统，内部合理的布局保证通风散热；
5. 立体声/并联/单声道桥接模式可选；
6. 输入灵敏度0.775V、1V和1.414V三档可选；
7. 公母卡侬输入接口，接线柱和SPEAKON输出接口
8. 短路、直流、过载、过热和开关机防冲击保护；
9. 广泛适用于各种扩音场所。

四通道
FOUR-Channel

General Specifications

Model	AK4400	AK4600	AK4800	AK41000
Stereo Power @8Ω 立体声输出功率 8Ω	400W×4	600W×4	800W×4	1000W×4
Stereo Power @4Ω 立体声输出功率 4Ω	600W×4	900W×4	1200W×4	1500W×4
Bridged Mono Output @8Ω 桥接输出功率 8Ω	1200W×2	1800W×2	2400W×2	3000W×2
S/N Ratio 信噪比	⩾98dB	⩾98dB	⩾98dB	⩾98dB
Conversion Rate 转换速率	15V/us			
Damping Factor 阻尼系数	＞230 (F=8Ω/1KHz)			
Frequency Response 频率响应	20Hz-20KHz, ±0.5dB			
THD 总谐波失真	＜0.1% (8Ω/1KHz)			
IMD 互调失真	62dB/8Ω/1KHz			
Input Sensitvity 输入灵敏度	0.775V/1V/1.414VOptional			
Input Impedance 输入阻抗	20KΩ Balance /10KΩ Unbalance			
Protection 保护功能	soft start, DC, short circuit, overheating, anti-shock and amplitude limit protection 软启动，直流保护，短路保护，过热保护，开关机防冲击和限幅			
Height 高度	2U			
Dimension (WxDxH) 产品尺寸	483×525×89mm			
Weight (kg) 产品净重	23.9	25.9	26.1	28.1

BH 功放
Power Amplifier

Feature

The BH series power amplifiers have always been trustworthy and flawless under harsh conditions. The groundbreaking KH series adopts advanced design, which greatly reduces the weight of the product, while at the same time increasing the output power, enhancing the reliability and heat dissipation efficiency. Its advanced technology and extensive protection circuit can ensure that the power amplifier works more efficiently and stably under harsher, overloaded, and high-power conditions. Main input voltage AC/220V, input impedance 20KΩ, damping coefficient ≈223, frequency response 20Hz-20KHz, 30KHz±3dB, total harmonic distortion <0.02%, signal-to-noise ratio>105dB, protection function: start signal delay start, over Current, over voltage, short circuit, over temperature protection, etc.

产品描述

BH系列功放在严苛的使用条件下一直都是值得信赖、完美无瑕。具有开创性的KH系列采用了先进的设计，大幅度降低了产品重量，而同时提高了输出功率，增强了可靠性和散热效率。其采用的先进技术和广泛保护电路能够确保功放在更严苛、超负荷、大功率条件下更高效稳定的工作。主输入电压AC/220V，输入阻抗20KΩ，阻尼系数≈223，频响20Hz-20KHz，30KHz±3dB，总谐波失真<0.02%，信噪比>105dB，保护功能：开机信号延时启动，过流、过压、短路、过温保护等。

General Specifications

Model	BH300	BH400	BH500	BH600	BH800	BH900	BH1100	BH1300	BH1500
Stereo Power @8Ω 立体声输出功率 8Ω	300W×2	400W×2	500W×2	600W×2	800W×2	900W×2	1100W×2	1300W×2	1500W×2
Stereo Power @4Ω 立体声输出功率 4Ω	380W×2	530W ×2	700W×2	850W×2	950W×2	1350W×2	1650W×2	1950W×2	2250W×2
Bridged Mono Output @8Ω 桥接输出功率 8Ω	750W	1050W	1400W	1700W	1900W	2700W	3300W	3900W	4500W
S/N Ratio 信噪比	＞98dB	＞98dB	＞98dB	＞98dB	＞98dB	＞105dB	＞105dB	＞105dB	＞105dB
Conversion Rate 转换速率	80V/us								
Damping Factor 阻尼系数	≈223								
Frequency Response 频率响应	20Hz-20KHz，30KHz±3dB								
THD 总谐波失真	＜0.05%								
IMD 互调失真	＜0.01								
Input Sensitvity 输入灵敏度	0.775V								
Input Impedance 输入阻抗	20KΩ								
Protection 保护功能	Slow start, over current, over voltage, short circuit, over temperature protection 开机信号延时启动，过流、过压、短路、过温保护								
Height 高度	2U					3U			
Dimension(WxDxH) 产品尺寸	450×483×90mm					530×483×132mm			
Weight(kg)产品净重	15	16	19.5	20.5	22.5	29	32	36	39

BH 功放
Power Amplifier

Feature

The BH series power amplifiers have always been trustworthy and flawless under harsh conditions. The groundbreaking KH series adopts advanced design, which greatly reduces the weight of the product, while at the same time increasing the output power, enhancing the reliability and heat dissipation efficiency. Its advanced technology and extensive protection circuit can ensure that the power amplifier works more efficiently and stably under harsher, overloaded, and high-power conditions. Main input voltage AC/220V, input impedance 20KΩ, damping coefficient ≈223, frequency response 20Hz-20KHz, 30KHz±3dB, total harmonic distortion <0.02%, signal-to-noise ratio>105dB, protection function: start signal delay start, over Current, over voltage, short circuit, over temperature protection, etc.

产品描述

BH系列功放在严苛的使用条件下一直都是值得信赖、完美无瑕。具有开创性的KH系列采用了先进的设计，大幅度降低了产品重量，而同时提高了输出功率，增强了可靠性和散热效率。其采用的先进技术和广泛保护电路能够确保功放在更严苛、超负荷、大功率条件下更高效稳定的工作。主输入电压AC/220V，输入阻抗20KΩ，阻尼系数≈223，频响20Hz-20KHz，30KHz±3dB，总谐波失真<0.02%，信噪比>105dB，保护功能：开机信号延时启动，过流、过压、短路、过温保护等。

General Specifications

Model	BH4300	BH4400	BH4600	BH4800
Stereo Power @8Ω 立体声输出功率 8Ω	300W×4	400W×4	600W×4	800W×4
Stereo Power @4Ω 立体声输出功率 4Ω	420W×4	560W×4	840W×4	1150W×4
Bridged Mono Output @8Ω 桥接输出功率 8Ω	840W×2	1120W×2	1680W×2	2240W×2
S/N Ratio 信噪比	>105dB	>105dB	>105dB	>105dB
Conversion Rate 转换速率	80V/us			
Damping Factor 阻尼系数	≈223			
Frequency Response 频率响应	20Hz-20KHz，30KHz±3dB			
THD 总谐波失真	＜0.05%			
IMD 互调失真	＜0.01			
Input Sensitvity 输入灵敏度	0.775V			
Input Impedance 输入阻抗	20KΩ			
Protection 保护功能	Slow start, over current, over voltage, short circuit, over temperature protection开机信号延时启动，过流、过压、短路、过温保护			
Height 高度	2U			
Dimension(WxDxH) 产品尺寸	450×483×90mm			
Weight(kg)产品净重	19	20	24	29

ET 功 放
Power Amplifier

Feature

The newly developed ET series power amplifier is multi-functional, high-quality, beautiful in sound and extremely stable. The entire series adopts a 2U chassis, and the internal structure adopts H circuit design. It is extremely cost-effective and highly praised by the industry.
The protection circuit of ET series models not only stays on the protection of the loudspeaker, but more importantly, allows it to adapt to the harsh working environment and work easily.

产品描述

最新开发的ET系列功率放大器，多功能，高质量，音色优美及稳定性极高，整个系列采用2U机箱，内部结构采用H电路设计，性价比极高，深受业内人士推崇。
ET系列机型的保护电路不只停留在扬声器的保护上面，更重要的是让它适应恶劣的工作环境，而能轻松地工作。

General Specifications

Model	ET250	ET450	ET600	ET800	ET1000
Stereo Power @8Ω 立体声输出功率 8Ω	250W×2	450W×2	650W×2	800W×2	1000W×2
Stereo Power @4Ω 立体声输出功率 4Ω	280W×2	550W×2	1040W×2	1280W×2	1600W×2
Bridged Mono Output @8Ω 桥接输出功率 8Ω	560W	1100W	2080W	2560W	3200W
S/N Ratio 信噪比	>98dB	>98dB	>103dB	>101dB	>101dB
Conversion Rate 转换速率	50V/us				
Damping Factor 阻尼系数	600:1KHz@8Ω				
Frequency Response 频率响应	20Hz-20KHz: ±0.1/0.3dB				
THD 总谐波失真	＜0.05@650W				
IMD 互调失真	＜0.01@650W				
Input Sensitvity 输入灵敏度	0.775V				
Input Impedance 输入阻抗	20kΩ Balance /10kΩ Unbalance				
Protection 保护功能	DC, Short circuit, Temperature, Limiter, Slow Start 直流、短路、超温、压限、软启动等				
Height 高度	2U				
Dimension (WxDxH) 产品尺寸	450×483×90mm				
Weight (kg) 产品净重	13	14	15	16	17

KC 功 放
Power Amplifier

Feature

The KC series power amplifiers have always been trustworthy and flawless under harsh conditions. The groundbreaking KC series adopts advanced design, which greatly reduces the weight of the product, while at the same time increasing the output power, enhancing the reliability and heat dissipation efficiency. Its advanced technology and extensive protection circuit can ensure that the power amplifier works more efficiently and stably under harsher, overloaded, and high-power conditions. Main input voltage AC/220V, input impedance 20KΩ, damping coefficient ≈223, frequency response 20Hz-20KHz, 30KHz±3dB, total harmonic distortion <0.02%, signal-to-noise ratio>105dB, protection function: start signal delay start, over Current, over voltage, short circuit, over temperature protection, etc.

产品描述

KC系列功放在严苛的使用条件下一直都是值得信赖、完美无瑕。具有开创性的KC系列采用了先进的设计，大幅度降低了产品重量，而同时提高了输出功率，增强了可靠性和散热效率。其采用的先进技术和广泛保护电路能够确保功放在更严苛、超负荷、大功率条件下更高效稳定的工作。主输入电压AC/220V，输入阻抗20KΩ，阻尼系数≈223，频响20Hz-20KHz，30KHz±3dB，总谐波失真<0.02%，信噪比>105dB，保护功能：开机信号延时启动，过流、过压、短路、过温保护等。

General Specifications

Model	KC200	KC300	KC400	KC500	KC600	KC800	KC900	KC1100	KC1300	KC500	KC4200	KC4300	KC4400	KC4600	KC4800
Stereo Power @8Ω 立体声输出功率 8Ω	200W×2	300W×2	400W×2	500W×2	600W×2	800W×2	900W×2	1100W×2	1300W×2	1500W×2	200W×4	300W×4	400W×4	600W×4	800W×4
Stereo Power @4Ω 立体声输出功率 4Ω	280W×2	380W ×2	530W×2	700W×2	850W×2	950W×2	1350W×2	1650W×2	1950W×2	2250W×2	280W×4	420W×4	560W×4	840W×4	1150W×4
Bridged Mono Output @8Ω 桥接输出功率 8Ω	400W	750W	1050W	1400W	1700W	1900W	2700W	3300W	3900W	4500W	560W×2	840W×2	1120W×2	1680W×2	2240W×2
S/N Ratio 信噪比	＞98dB	＞98dB	＞98dB	＞98dB	＞98dB	＞98dB	＞105dB	＞105dB	＞105dB	＞105dB	＞105dB	＞105dB	＞105dB	＞105dB	＞105dB
Conversion Rate 转换速率	80V/us														
Damping Factor 阻尼系数	≈223														
Frequency Response 频率响应	20Hz-20KHz，30KHz±3dB														
THD 总谐波失真	＜0.05%														
IMD 互调失真	＜0.01														
Input Sensitvity 输入灵敏度	0.775V														
Input Impedance 输入阻抗	20KΩ														
Protection 保护功能	Slow start, over current, over voltage, short circuit, over temperature protection 开机信号延时启动，过流、过压、短路、过温保护														
Height 高度	2U						3U				2U				
Dimension (WxDxH) 产品尺寸	450×483×90mm						530×483×132mm				450×483×90mm				
Weight (kg) 产品净重	14	15	16	19.5	20.5	22.5	29	32	36	39	18	19	20	24	29

KM 功 放

Power Amplifier

Feature

1. Class H circuit is designed with a ring transformer, high-efficiency power conversion, and provides a continuous and stable power supply for the power amplifier;
2. The middle and high frequency are delicate, and the low frequency is strong;
3. The front panel has a precise control knob, and there are fault (FAULT), peak clipping (CLIP), signal (SIGNAL) and power (ON) LED indicators;
4. Reasonable internal layout and efficient heat dissipation design, wind flow diversion system from front to back;
5. Optional stereo/parallel/bridge working mode;
6. Optional sensitivity 0.775V, 1V, 1.4V, 2V;
7. Comprehensive heat dissipation protection, including soft start, DC protection, short circuit protection, overheating protection, anti-shock protection and amplitude limit protection;
8. Widely used in various sound reinforcement places.

产品描述

1. H类电路搭配环牛变压器设计，高效率功率转换，并为功放提供连续稳定的电源供应；
2. 中高音细腻，低频强劲；
3. 前面板拥有精确的控制旋钮，并有故障(FAULT)、削峰(CLIP)、信号(SIGNA)和电源(ON) LED指示灯；
4. 内部合理的布局和高效的散热设计，从前到后的风流导流系统；
5. 立体声/并接/桥接的工作模式选择；
6. 灵敏度0.775V, 1V, 1.4V, 2V可选；
7. 全面的散热保护，包括有软启动，直流保护，短路保护，过热保护，开关机防冲击和限幅；
8. 广泛地应用于各种扩声场所。

General Specifications

Model	KM408	KM608	KM808	KM1008
Stereo Power @8Ω 立体声输出功率 8Ω	400W×2	600W×2	800W×2	1000W×2
Stereo Power @4Ω 立体声输出功率 4Ω	600W×2	900W×2	1200W×2	1500W×2
Bridged Mono Output @8Ω 桥接输出功率 8Ω	1200W	1800W	2400W	3000W
S/N Ratio 信噪比	⩾100dB	⩾100dB	⩾100dB	⩾100dB
Conversion Rate 转换速率	15V/us			
Damping Factor 阻尼系数	＞230 (F=8Ω/1KHz)			
Frequency Response 频率响应	20Hz-20KHz,0.5dB			
THD 总谐波失真	＜0.05%			
IMD 互调失真	＜0.01			
Input Sensitvity 输入灵敏度	0.775V/1V/1.4V/2V Optional			
Input Impedance 输入阻抗	20KΩ Balance /10KΩ Unbalance			
Protection 保护功能	soft start, DC, short circuit, overheating, anti-shock and amplitude limit protection 软启动，直流保护，短路保护，过热保护，开关机防冲击和限幅			
Height 高度	2U			
Dimension (WxDxH) 产品尺寸	483×378×89mm			
Weight (kg) 产品净重	13.5	15.5	16.5	18

DM 功 放

Power Amplifier

Feature

1. Class H circuit is designed with a ring transformer, high-efficiency power conversion, and provides a continuous and stable power supply for the power amplifier;
2. The middle and high frequency are delicate, and the low frequency is strong;
3. The front panel has a precise control knob, and there are fault (FAULT), peak clipping (CLIP), signal (SIGNAL) and power (ON) LED indicators;
4. Reasonable internal layout and efficient heat dissipation design, wind flow diversion system from front to back;
5. Optional stereo/parallel/bridge working mode;
6. Optional sensitivity 0.775V, 1V, 1.4V, 2V;
7. Comprehensive heat dissipation protection, including soft start, DC protection, short circuit protection, overheating protection, anti-shock protection and amplitude limit protection;
8. Widely used in various sound reinforcement places.

产品描述

1. H类电路搭配环牛变压器设计，高效率功率转换，并为功放提供连续稳定的电源供应；
2. 中高音细腻，低频强劲；
3. 前面板拥有精确的控制旋钮，并有故障(FAULT)、削峰(CLIP)、信号(SIGNAL)和电源(ON)LED指示灯；
4. 内部合理的布局和高效的散热设计，从前到后的风流导流系统；
5. 立体声/并接/桥接的工作模式选择；
6. 灵敏度0.775V, 1V, 1.4V, 2V可选；
7. 全面的散热保护，包括有软启动，直流保护，短路保护，过热保护，开关机防冲击和限幅；
8. 广泛地应用于各种扩声场所。

General Specifications

Model	DM408	DM608	DM808	DM1008
Stereo Power @8Ω 立体声输出功率 8Ω	400W×2	600W×2	800W×2	1000W×2
Stereo Power @4Ω 立体声输出功率 4Ω	600W×2	900W×2	1200W×2	1500W×2
Bridged Mono Output @8Ω 桥接输出功率 8Ω	1200W	1800W	2400W	3000W
S/N Ratio 信噪比	⩾100dB	⩾100dB	⩾100dB	⩾100dB
Conversion Rate 转换速率	15V/us			
Damping Factor 阻尼系数	＞230 (F=8Ω/1KHz)			
Frequency Response 频率响应	20Hz-20KHz,0.5dB			
THD 总谐波失真	＜0.05%			
IMD 互调失真	＜0.01			
Input Sensitvity 输入灵敏度	0.775V/1V/1.4V/2V Optional			
Input Impedance 输入阻抗	20KΩ Balance /10KΩ Unbalance			
Protection 保护功能	soft start, DC, short circuit, overheating, anti-shock and amplitude limit protection 软启动，直流保护，短路保护，过热保护，开关机防冲击和限幅			
Height 高度	2U			
Dimension (WxDxH) 产品尺寸	483×378×89mm			
Weight (kg) 产品净重	13.5	15.5	16.5	18

FW 功 放

Power Amplifier

Feature

The FW series power amplifiers have always been trustworthy and flawless under harsh conditions. The groundbreaking FW series adopts advanced design, which greatly reduces the weight of the product, while at the same time increasing the output power, enhancing the reliability and heat dissipation efficiency. Its advanced technology and extensive protection circuit can ensure that the power amplifier works more efficiently and stably under harsher, overloaded, and high-power conditions. Main input voltage AC/220V, input impedance 20KΩ, damping coefficient ≈223, frequency response 20Hz-20KHz, 30KHz±3dB, total harmonic distortion <0.02%, signal-to-noise ratio>105dB, protection function: start signal delay start, over Current, over voltage, short circuit, over temperature protection, etc.

产品描述

FW系列功放在严苛的使用条件下一直都是值得信赖、完美无瑕。具有开创性的FW系列采用了先进的设计，大幅度降低了产品重量，而同时提高了输出功率，增强了可靠性和散热效率。其采用的先进技术和广泛保护电路能够确保功放在更严苛、超负荷、大功率条件下更高效稳定的工作。主输入电压AC/220V，输入阻抗20KΩ，阻尼系数≈223，频响20Hz-20KHz，30KHz±3dB，总谐波失真<0.02%，信噪比>105dB，保护功能：开机信号延时启动，过流、过压、短路、过温保护等。

General Specifications

Model	FW200	FW300	FW400	FW500	FW600	FW800	FW900	FW1100	FW1300	FW1500
Stereo Power @8Ω 立体声输出功率 8Ω	200W×2	300W×2	400W×2	500W×2	600W×2	800W×2	900W×2	1100W×2	1300W×2	1500W×2
Stereo Power @4Ω 立体声输出功率 4Ω	280W×2	380W ×2	530W×2	700W×2	850W×2	950W×2	1350W×2	1650W×2	1950W×2	2250W×2
Bridged Mono Output @8Ω 桥接输出功率 8Ω	400W	750W	1050W	1400W	1700W	1900W	2700W	3300W	3900W	4500W
S/N Ratio 信噪比	＞98dB	＞98dB	＞98dB	＞98dB	＞98dB	＞98dB	＞105dB	＞105dB	＞105dB	＞105dB
Conversion Rate 转换速率	80V/us									
Damping Factor 阻尼系数	≈223									
Frequency Response 频率响应	20Hz-20KHz，30KHz±3dB									
THD 总谐波失真	＜0.05%									
IMD 互调失真	＜0.01									
Input Sensitvity 输入灵敏度	0.775V									
Input Impedance 输入阻抗	20KΩ									
Protection 保护功能	DC, Short circuit, Temperature, Limiter, Slow Start 直流、短路、超温、压限、软启动等									
Height 高度	2U						3U			
Dimension(WxDxH) 产品尺寸	450×483×90mm						530×483×132mm			
Weight(kg) 产品净重	14	15	16	19.5	20.5	22.5	29	32	36	39

KH 功 放

Power Amplifier

Feature

The KH series power amplifiers have always been trustworthy and flawless under harsh conditions. The groundbreaking KH series adopts advanced design, which greatly reduces the weight of the product, while at the same time increasing the output power, enhancing the reliability and heat dissipation efficiency. Its advanced technology and extensive protection circuit can ensure that the power amplifier works more efficiently and stably under harsher, overloaded, and high-power conditions. Main input voltage AC/220V, input impedance 20KΩ, damping coefficient ≈223, frequency response 20Hz-20KHz, 30KHz±3dB, total harmonic distortion <0.02%, signal-to-noise ratio>105dB, protection function: start signal delay start, over Current, over voltage, short circuit, over temperature protection, etc.

产品描述

KH系列功放在严苛的使用条件下一直都是值得信赖、完美无瑕。具有开创性的KH系列采用了先进的设计，大幅度降低了产品重量，而同时提高了输出功率，增强了可靠性和散热效率。其采用的先进技术和广泛保护电路能够确保功放在更严苛、超负荷、大功率条件下更高效稳定的工作。主输入电压AC/220V，输入阻抗20KΩ，阻尼系数≈223，频响20Hz-20KHz，30KHz±3dB，总谐波失真<0.02%，信噪比>105dB，保护功能：开机信号延时启动，过流、过压、短路、过温保护等。

General Specifications

Model	KH200	KH300	KH400	KH500	KH600	KH800	KH4200	KH4300	KH4400	KH4600	KH4800
Stereo Power @8Ω 立体声输出功率 8Ω	200W×2	300W×2	400W×2	500W×2	600W×2	800W×2	200W×4	300W×4	400W×4	600W×4	800W×4
Stereo Power @4Ω 立体声输出功率 4Ω	280W×2	380W ×2	530W×2	700W×2	850W×2	950W×2	280W×4	420W×4	560W×4	840W×4	1150W×4
Bridged Mono Output @8Ω 桥接输出功率 8Ω	400W	750W	1050W	1400W	1700W	1900W	560W×2	840W×2	1120W×2	1680W×2	2240W×2
S/N Ratio 信噪比	＞98dB	＞98dB	＞98dB	＞98dB	＞98dB	＞98dB	＞105dB	＞105dB	＞105dB	＞105dB	＞105dB
Conversion Rate 转换速率	80V/us										
Damping Factor 阻尼系数	≈223										
Frequency Response 频率响应	20Hz-20KHz，30KHz±3dB										
THD 总谐波失真	＜0.05%										
IMD 互调失真	＜0.01										
Input Sensitvity 输入灵敏度	0.775V										
Input Impedance 输入阻抗	20KΩ										
Protection 保护功能	DC, Short circuit, Temperature, Limiter, Slow Start 直流、短路、超温、压限、软启动等										
Height 高度	2U										
Dimension(WxDxH) 产品尺寸	450×483×90mm										
Weight(kg) 产品净重	14	15	16	19.5	20.5	22.5	18	19	20	24	29

LY 功 放
Power Amplifier

Feature

The newly developed LY series power amplifier is multi-functional, high-quality, beautiful in sound and extremely stable. The entire series adopts a 2U chassis, and the internal structure adopts H circuit design. It is extremely cost-effective and highly praised by the industry.
The protection circuit of LY series models not only stays on the protection of the loudspeaker, but more importantly, allows it to adapt to the harsh working environment and work easily.

产品描述

最新开发的LY系列功率放大器，多功能，高质量，音色优美及稳定性极高，整个系列采用2U机箱，内部结构采用H电路设计，性价比极高，深受业内人士推崇。
LY系列机型的保护电路不只停留在扬声器的保护上面，更重要的是让它适应恶劣的工作环境，而能轻松地工作。

General Specifications

Model	LY2650	LY2800	LY21000
Stereo Power @8Ω 立体声输出功率 8Ω	650W×2	800W×2	1000W×2
Stereo Power @4Ω 立体声输出功率 4Ω	1040W×2	1280W×2	1600W×2
Bridged Mono Output @8Ω 桥接输出功率 8Ω	2080W	2560W	3200W
S/N Ratio 信噪比	＞103dB	＞101dB	＞101dB
Conversion Rate 转换速率	50V/us		
Damping Factor 阻尼系数	600:1KHz@8Ω		
Frequency Response 频率响应	20Hz-20KHz:±0.1/0.3dB		
THD 总谐波失真	＜0.05@650W		
IMD 互调失真	＜0.01@650W Into-60Hz&7KHz		
Input Sensitvity 输入灵敏度	0.775V		
Input Impedance 输入阻抗	20KΩ Balance /10KΩ Unbalance		
Protection 保护功能	DC, Short circuit, Temperature, Limiter, Slow Start 直流、短路、超温、压限、软启动等		
Height 高度	2U		
Dimension(WxDxH) 产品尺寸	483×346×88mm		
Weight(kg)产品净重	15	16	17

MQ 功 放
Power Amplifier

Feature

MQ series power amplifiers are multi-functional, high-quality, beautiful in sound and extremely stable. The entire series adopts a 2U chassis, which is extremely cost-effective, and is highly respected by the industry.
The protection circuit of LY series models not only stays on the protection of the loudspeaker, but more importantly, allows it to adapt to the harsh working environment and work easily.

产品描述

MQ系列功率放大器，多功能，高质量，音色优美及稳定性极高，整个系列采用2U机箱，性价比极高，深受业内人士推崇。
LY系列机型的保护电路不只停留在扬声器的保护上面，更重要的是让它适应恶劣的工作环境，而能轻松地工作。

General Specifications

Model	MQ180	MQ250	MQ350	MQ500	MQ600	MQ700
Stereo Power @8Ω 立体声输出功率 8Ω	180W×2	250W×2	350W×2	500W×2	600W×2	700W×2
Stereo Power @4Ω 立体声输出功率 4Ω	/	380W×2	530W×2	700W×2	850W×2	950W×2
Bridged Mono Output @8Ω 桥接输出功率 8Ω	/	750W	1050W	1400W	1700W	1900W
S/N Ratio 信噪比	＞98dB	＞98dB	＞98dB	＞98dB	＞98dB	＞98dB
Conversion Rate 转换速率	80V/us					
Damping Factor 阻尼系数	≈223					
Frequency Response 频率响应	20Hz-20KHz，30KHz±3dB					
THD 总谐波失真	＜0.05%					
IMD 互调失真	＜0.01					
Input Sensitvity 输入灵敏度	0.775V					
Input Impedance 输入阻抗	20KΩ					
Protection 保护功能	DC, Short circuit, Temperature, Limiter, Slow Start 直流、短路、超温、压限、软启动等					
Height 高度	2U					
Dimension(WxDxH) 产品尺寸	450×483×90mm					
Weight(kg)产品净重	16	17	18	19	20	22