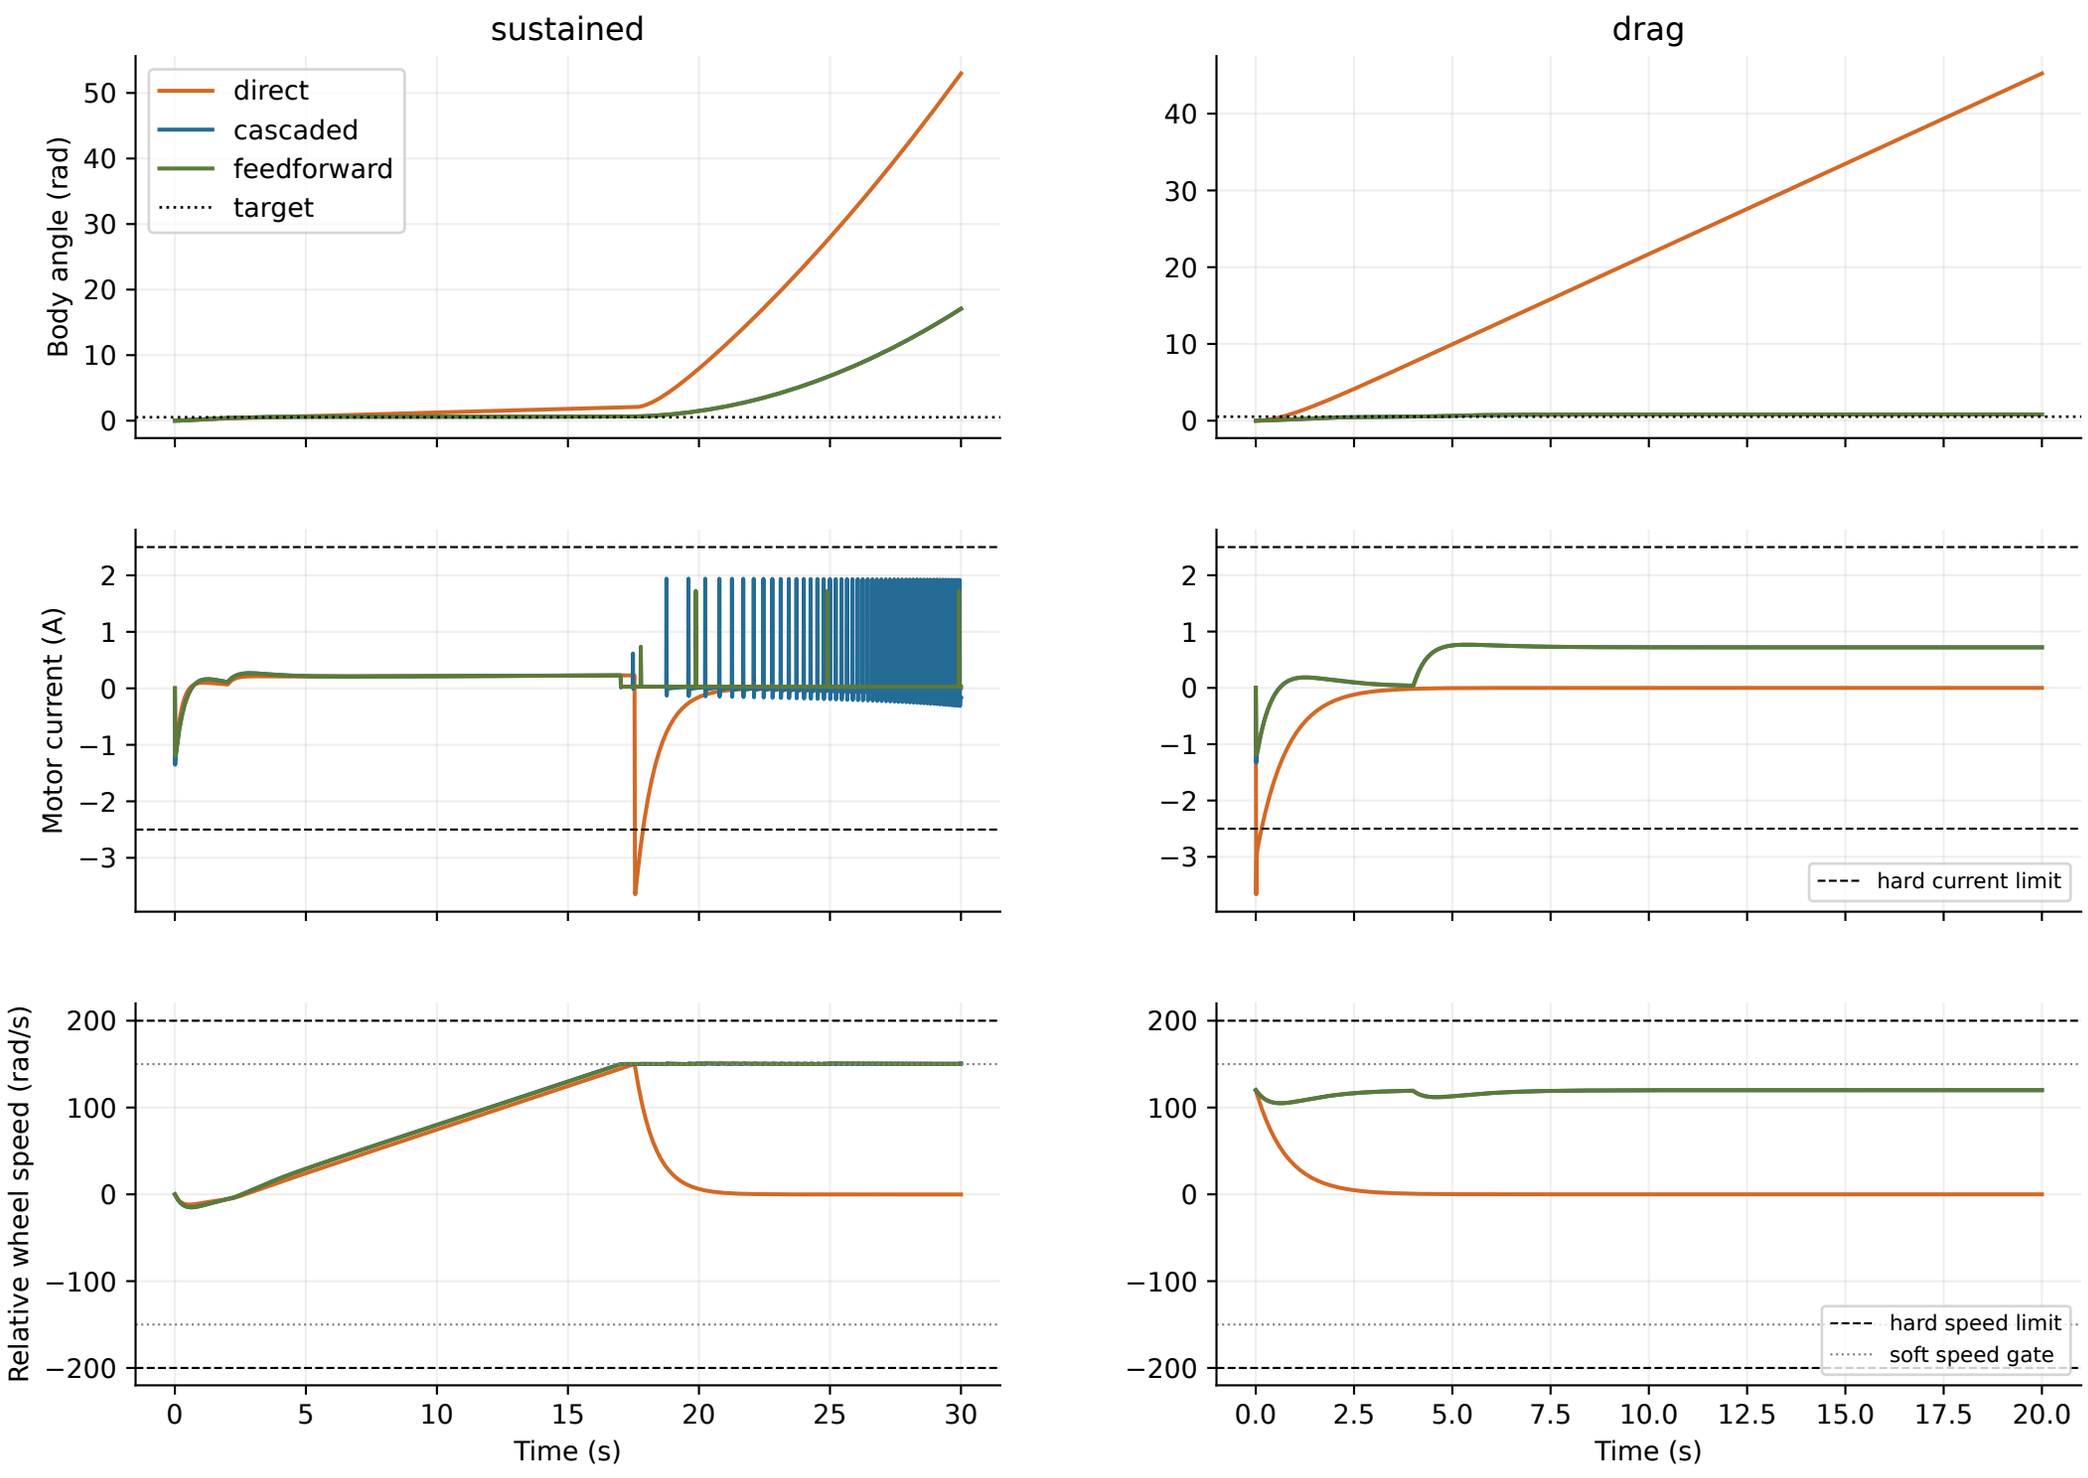
Failure envelopes: finite momentum capacity and unmodeled drag
sustained
drag
direct
cascaded
feedforward
target
Body angle (rad)
Motor current (A)
Relative wheel speed (rad/s)
hard current limit
hard speed limit
soft speed gate
Time (s)
Time (s)