TAITIEN
Our Performance, Your Reputation

XJ Type
12.5 x 4.5 mm Crystal




RoHS Compliant


FEATURE
- Typical 12.5 x 4.5 x 4.0 mm metal can SMD package.
- 24mm width Tape & Reel package for automatic assembly.

TYPICAL APPLICATION
- Automotive
- Bluetooth, Wireless
- Computers, Modems, Communications
- Set-top Box, DECT/WDCT

DIMENSION (mm)

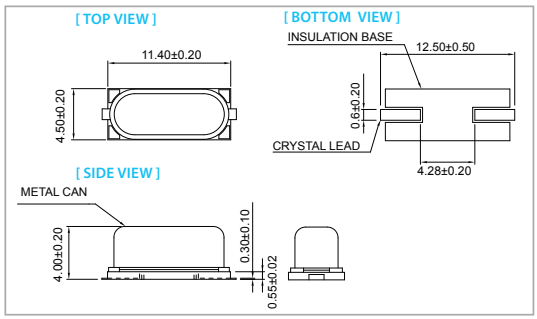

SOLDER PAD LAYOUT (mm)

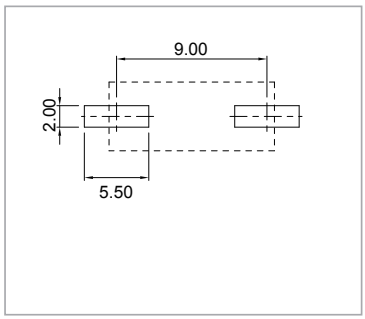

ELECTRICAL SPECIFICATION

Parameter	Min.	Typical	Max.	Unit
Storage Temp. Range	-55	-	125	˚C
Standard Frequency	4.096, 10.368, 16, 25, 32, 48			MHz
Level of Drive	-	10	500	μw
Shunt Capacitance (Co)	-	-	7.0	pF
Insulation Resistance	500 MΩ@ DC100V	-	-	
Aging (@25°C 1st year)	±5.0			ppm / year

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

EQUIVALENT SERIES RESISTANCE (E.S.R)

Frequency Range	MODE	E.S.R
Fo ≦ 3.58 MHz	A1	<140 Ω
4 MHz < Fo < 5 MHz	A1	<120 Ω
5 MHz ≦ Fo < 7 MHz	A1	<80 Ω
7 MHz ≦ Fo < 9 MHz	A1	<45 Ω
9 MHz ≦ Fo < 13 MHz	A1	<40 Ω
13 MHz ≦ Fo < 16 MHz	A1	<35 Ω
16 MHz ≦ Fo < 20 MHz	A1	<30 Ω
20 MHz ≦ Fo < 30 MHz	A1	<25 Ω
30 MHz ≦ Fo < 36 MHz	A1	<25 Ω
30 MHz ≦ Fo < 36 MHz	A3	<80 Ω
36 MHz ≦ Fo ≦ 80 MHz	A3	<80 Ω

FREQ. STABILITY vs. LOAD CAPACITANCE(E.S.R)

Load Capacitance \ ppm	±5	±10	±15	±20	±30
8pF	×	×	△	○	○
10pF	×	×	△	○	○
12pF	×	△	○	○	○
16pF	×	△	○	○	○
Series	△	○	○	○	○

* ○: Available △:Conditional X: Not available

FREQ. STABILITY vs. LOAD CAPACITANCE(E.S.R)

Temp. (°C) \ ppm	±5	±10	±15	±20
-10 ~ +60	×	○	○	○
-20 ~ +70	×	△	○	○
-40 ~ +85	×	×	×	○

* ○: Available △:Conditional X: Not available

Note: not all combination of options are available. Other specifications may be available upon request.