
TAITIEN
Our Performance, Your Reputation

XZ Type
2.0 x 1.6 mm SMD Crystal



RoHS Compliant


FEATURE

- Conforms to AEC-Q200
- Typical 2.05 x 1.65 x 0.45 mm ultra thin ceramic package.
- 8 mm width Tape & Reel package for automatic assembly.
- Tight tolerance 10 ppm available.


TYPICAL APPLICATION

- Bluetooth , Mobile phone, Wireless LAN.
- Office Automation
- Audio & Video

DIMENSION (mm)

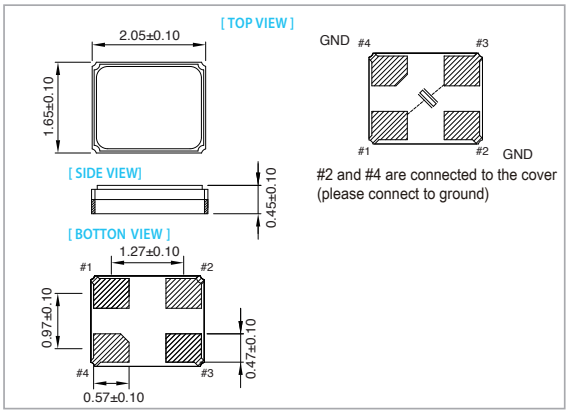

SOLDER PAD LAYOUT (mm)

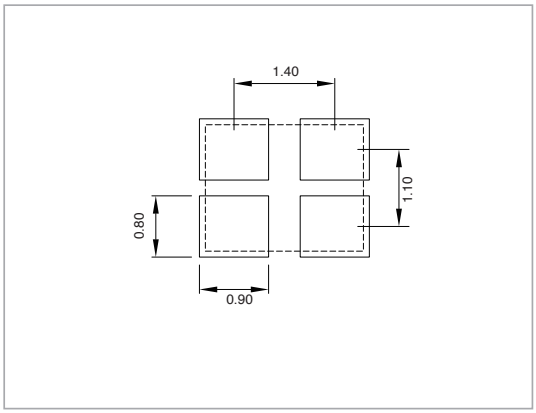

ELECTRICAL SPECIFICATION

Parameter	Min.	Typical	Max.	Unit
Storage Temp. Range	-55	-	125	˚C
Standard Frequency	26, 30, 32, 40, 76.8, 80			MHz
Level of Drive	-	10	200	µw
Shunt Capacitance (Co)	-	-	3.0	pF
Insulation Resistance	500 MΩ @ DC100V	-	-	
Aging	±1.0 to ±3.0			ppm / year

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

EQUIVALENT SERIES RESISTANCE (E. S. R.)

Frequency Range	MODE	E.S.R
16 MHz ≦ Fo ≦ 20 MHz	A1	<100 Ω
20 MHz < Fo ≦ 30 MHz	A1	<60 Ω
30 MHz < Fo ≦ 100 MHz	A1	<50 Ω

FREQ. STABILITY vs. TEMP. RANGE

ppm / Temp.(°C)	±5	±10	±15	±20	±30	±50
-10 ~ +60	△	○	○	○	○	○
-20 ~ +70	×	△	○	○	○	○
-40 ~ +85	×	×	△	○	○	○
-40 ~ +105	×	×	△	○	○	○
-40 ~ +125	×	×	×	×	△	○

* ○: Available △:Conditional X: Not available

Note: not all combination of options are available. Other specifications may be available upon request.