
OT-M Type
7.0 x 5.0 mm SMD CMOS Crystal Oscillator




RoHS Compliant

FEATURE
- Industry Standard 7.0 x 5.0 hermetically sealed ceramic package
- Very low phase jitter: <1 pS(0.6 pS, typ.) RMS
- Any frequency between 10 MHz and 250 MHz.
- Tri-state enable/disable
- Fast delivery


TYPICAL APPLICATION
- High-Speed Gbit Ethernet, Fiber Channel, Storage Area Network, SONET
- Enterprise Server, SAS/SATA
- Microprocessors / DSP / FPGA
- Broadband Access
- Smart Grid

DIMENSION (mm)

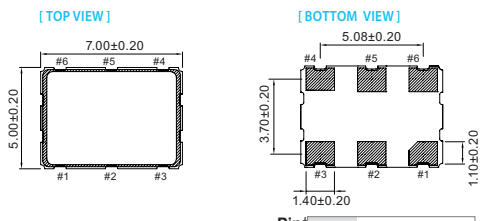

Pin#	Function
1	NC/Tri-State
2	Tri-State/NC
3	GND
4	Output
5	Comp.output
6	VDD

SOLDER PAD LAYOUT (mm)



To ensure optimal oscillator performance, place a by-pass capacitor of 0.1μF as close to the part as possible between Vdd and GND pads.

ELECTRICAL SPECIFICATION

Parameter		CMOS 3.3 V Min.	CMOS 3.3 V Max.	CMOS 2.5 V Min.	CMOS 2.5 V Max.	unit
Supply Voltage Variation (VDD)		VDD-5%	VDD +5%	VDD-5%	VDD +5%	V
Frequency Range		10	250	10	250	MHz
Standard Frequency		106.25, 125, 133.33, 150, 155.52, 156.25, 187.5, 212.5				
Supply Current	10 MHz ≦ Fo ≦ 250 MHz	-	30	-	30	mA
Output Level	Output High (Logic "1")	2.97	-	2.25	-	V
	Output Low (Logic "0")	-	0.33	-	0.25	
Transition Time: Rise/Fall Time+		-	3	-	3	nSec
Start Time		-	10	-	10	mSec
Tri-State(Input to Pin 2 or Pin 1)						
Enable (High voltage or floating)		2.31	-	1.75	-	V
Disable (Low voltage or GND)		-	0.99	-	0.75	
RMS Phase Jitter (Integrated 12 kHz ~ 20 MHz) (At Integer Mode)		-	1.0	-	1.0	pSec
Phase Noise@125 MHz	100 Hz	-	-75	-	-75	dBc/Hz
	1 kHz	-	-105	-	-105	
	10 kHz	-	-120	-	-120	
Aging (@ 25°C 1st year)		-	±3	-	±3	ppm
Storage Temp. Range		-55	125	-55	125	°C

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C) \ ppm	±25	±50
-10 ~ +60	○	○
-20 ~ +70	○	○
-40 ~ +85	△	○
-40 ~ +105	X	△

* ○: Available △:Conditional X: Not available
* Inclusive of calibration @ 25 °C, operating temperature range, input voltage variation, load variation, aging (1st year), shock, and vibration

Note: not all combination of options are available. Other specifications may be available upon request.

Specifications subject to change without notice.
www.taitien.com
sales@taitien.com.tw
Rev(10) 06/2025