
TAITIEN
Our Performance, Your Reputation

OA-M Type

FASTXO 3.2 x 2.5 mm SMD CMOS Output Crystal Oscillator



RoHS Compliant


FEATURES

- Low Power Supply Voltage: 3.3V, 2.5V Supply Options
- Differential Output : CMOS
- Frequency Support from 10MHz to 250MHz
- Low Noise Typical: 0.8ps at 12kHz to 20MHz Frequency Offsets
- Temperature Range: -40 to 85°C Operation
- Pb-free/RoHS Compliant


TYPICAL APPLICATION

- Enterprise Server, SAS/SATA, Microprocessors/DSP/FPGA, Broadband Access,Smart Grid
- High-Speed Gigabite Ethernet, Fiber Channel, Storages Area Network, SONET

DIMENSION (mm)

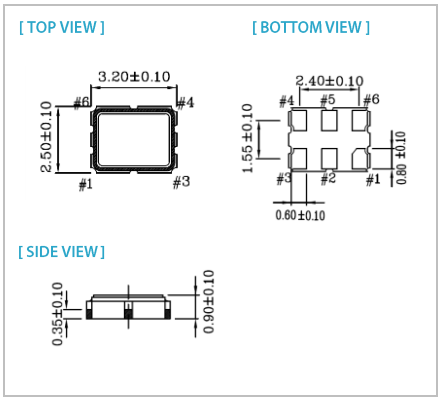

SOLDER PAD LAYOUT (mm)



To ensure optimal oscillator performance, place a by-pass capacitor of 0.1μF as close to the part as possible between V_{DD} and GND pads.

PIN FUNCTION (mm)

PIN#	FUNCTION
1	NC/Tri-State
2	Tri-State/NC
3	GND
4	Output
5	No Connection
6	Supply Voltage

ELECTRICAL SPECIFICATION

Parameter		CMOS				Unit	Test Condition
		3.3V		2.5V			
		Min.	Max.	Min.	Max.		
Supply Voltage Variation (V_{DD})		V_{DD} – 10%	V_{DD} + 10%	V_{DD} - 5%	V_{DD} + 5%	V	
Frequency Range		10	250	10	250	MHz	
Supply Current		-	50	-	45	mA	
Output Level	Output High	2.97	-	2.25	-	V	
	Output Low	-	0.33	-	0.25	V	
Transition Time (10%-90%)	Rise Time / Fall Time	-	3	-	3	nSec	
Duty Cycle		45	55	45	55	%	
Startup Time		-	10	-	10	mSec	
Tri-State Mode(Input to Pin 2)	Enable	0.7 x V_{DD}	-	0.7 x V_{DD}	-	V	
	Disable	-	0.3 x V_{DD}	-	0.3 x V_{DD}	V	
Stand by Current		-	18	-	18	mA	
Output Loading (10MHz to 200MHz)		-	15	-	15	Pf	
Output Loading (200MHz to 250MHz)		-	5	-	5	pf	
Phase Noise		Typ.	Max.	Typ.	Max.		
At V_{DD}=3.3V, fout=250MHz	1kHz offset	-107	-	-107	-	dBc/Hz	
	10kHz offset	-111	-	-111	-	dBc/Hz	
	100kHz offset	-114	-	-114	-	dBc/Hz	
	1MHz offset	-125	-	-125	-	dBc/Hz	
	20MHz offset	-147	-	-147	-	dBc/Hz	
RMS Phase Jitter (12 kHz~20 MHz)		0.8	1.5	0.8	1.5	pSec	

FREQ. STABILITY vs. TEMP. RANGE

Temp.(°C) \ ppm	±25	±50
-10 ~ +60	○	○
-20 ~ +70	○	○
-40 ~ +85	△	○
-40 ~ +105	×	△

○: Available △:Conditional ×: Not Available
Inclusive of calibration @ 25°C ,operating temperature rrange,input Voltage variation,load variation,aging (1st year),shock,and vibration

Note: not all combination of options are available. Other specifications may be available upon request.
Specifications subject to change without notice.

www.taitien.com
sales@taitien.com.tw

XO-0149
Rev(6) 09/2025