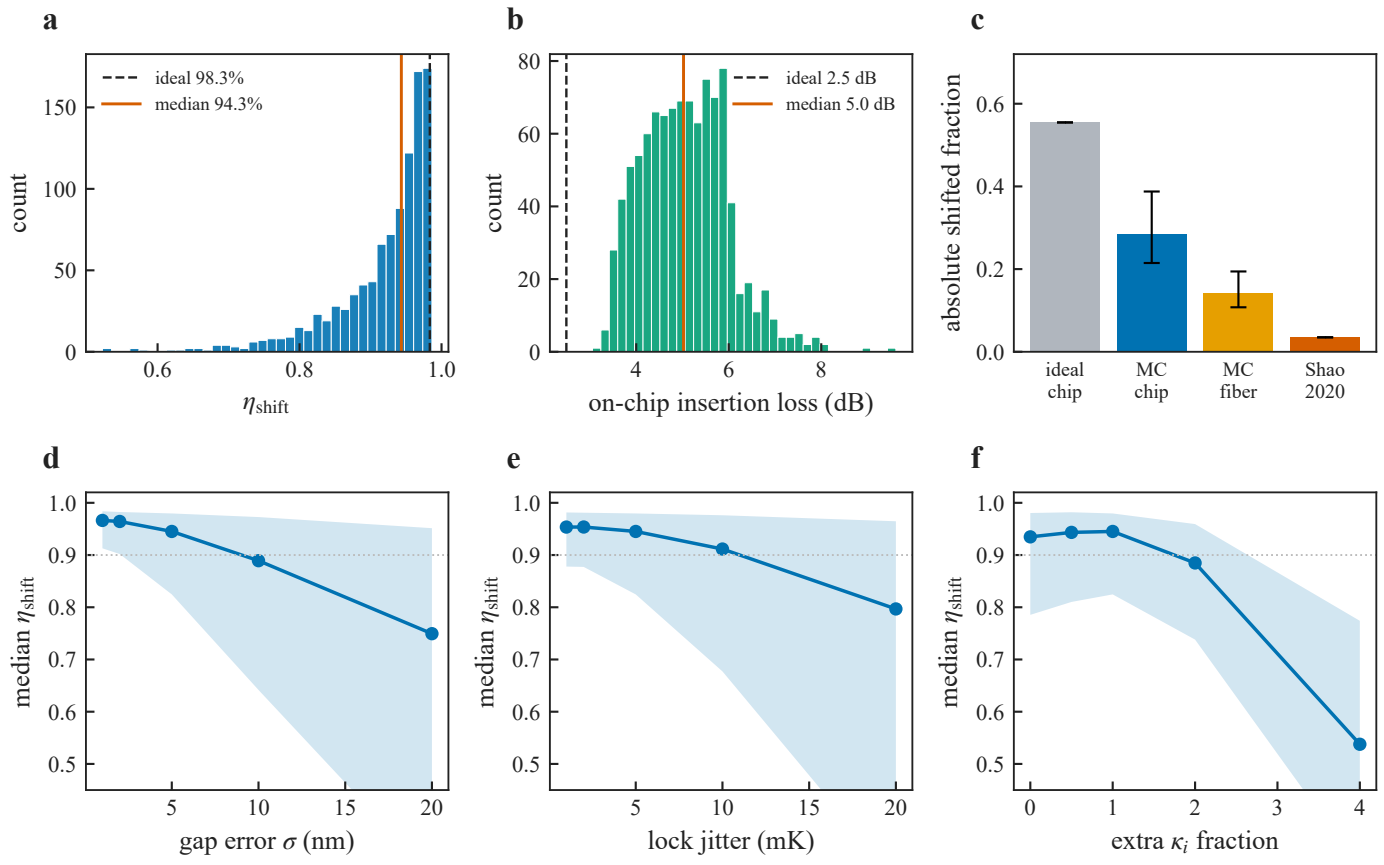

a
ideal 98.3%
median 94.3%
count
η_{shift}
b
ideal 2.5 dB
median 5.0 dB
count
on-chip insertion loss (dB)
c
absolute shifted fraction
ideal chip
MC chip
MC fiber
Shao 2020
d
median η_{shift}
gap error σ (nm)
e
median η_{shift}
lock jitter (mK)
f
median η_{shift}
extra κ_i fraction