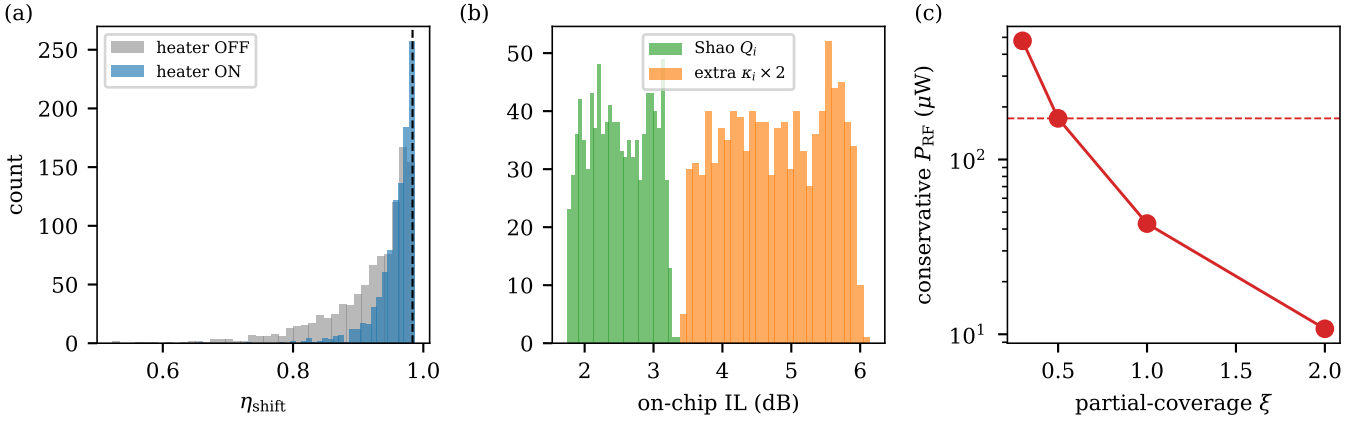
(a)
heater OFF
heater ON
count
η_{shift}
(b)
Shao Q_i
extra $\kappa_i \times 2$
on-chip IL (dB)
(c)
conservative P_{RF} (μW)
partial-coverage $\bar{\xi}$