


SPECIFICATIONS

AVAILABLE RANGES:	250 TO 1000 LBS
SUPPLY:	10 VDC
OUTPUT:	2 mV/V
NONLINEARITY:	± .15% F.S.
HYSTERESIS:	± .15% F.S.
COMPENSATED TEMPERATURE:	60°F TO 160°F
TEMPERATURE EFFECT:	
ZERO:	±.005% F.S./°F
SPAN:	±.005% Rdg./°F
BRIDGE RESISTANCE:	350 ohms
CASE MATERIAL:	17-4 PH SS

WIRING CODE

COLOR	DESIGNATION
RED	(+)EXCITATION
BLACK	(-)EXCITATION
GREEN	(-)OUTPUT
WHITE	(+)OUTPUT

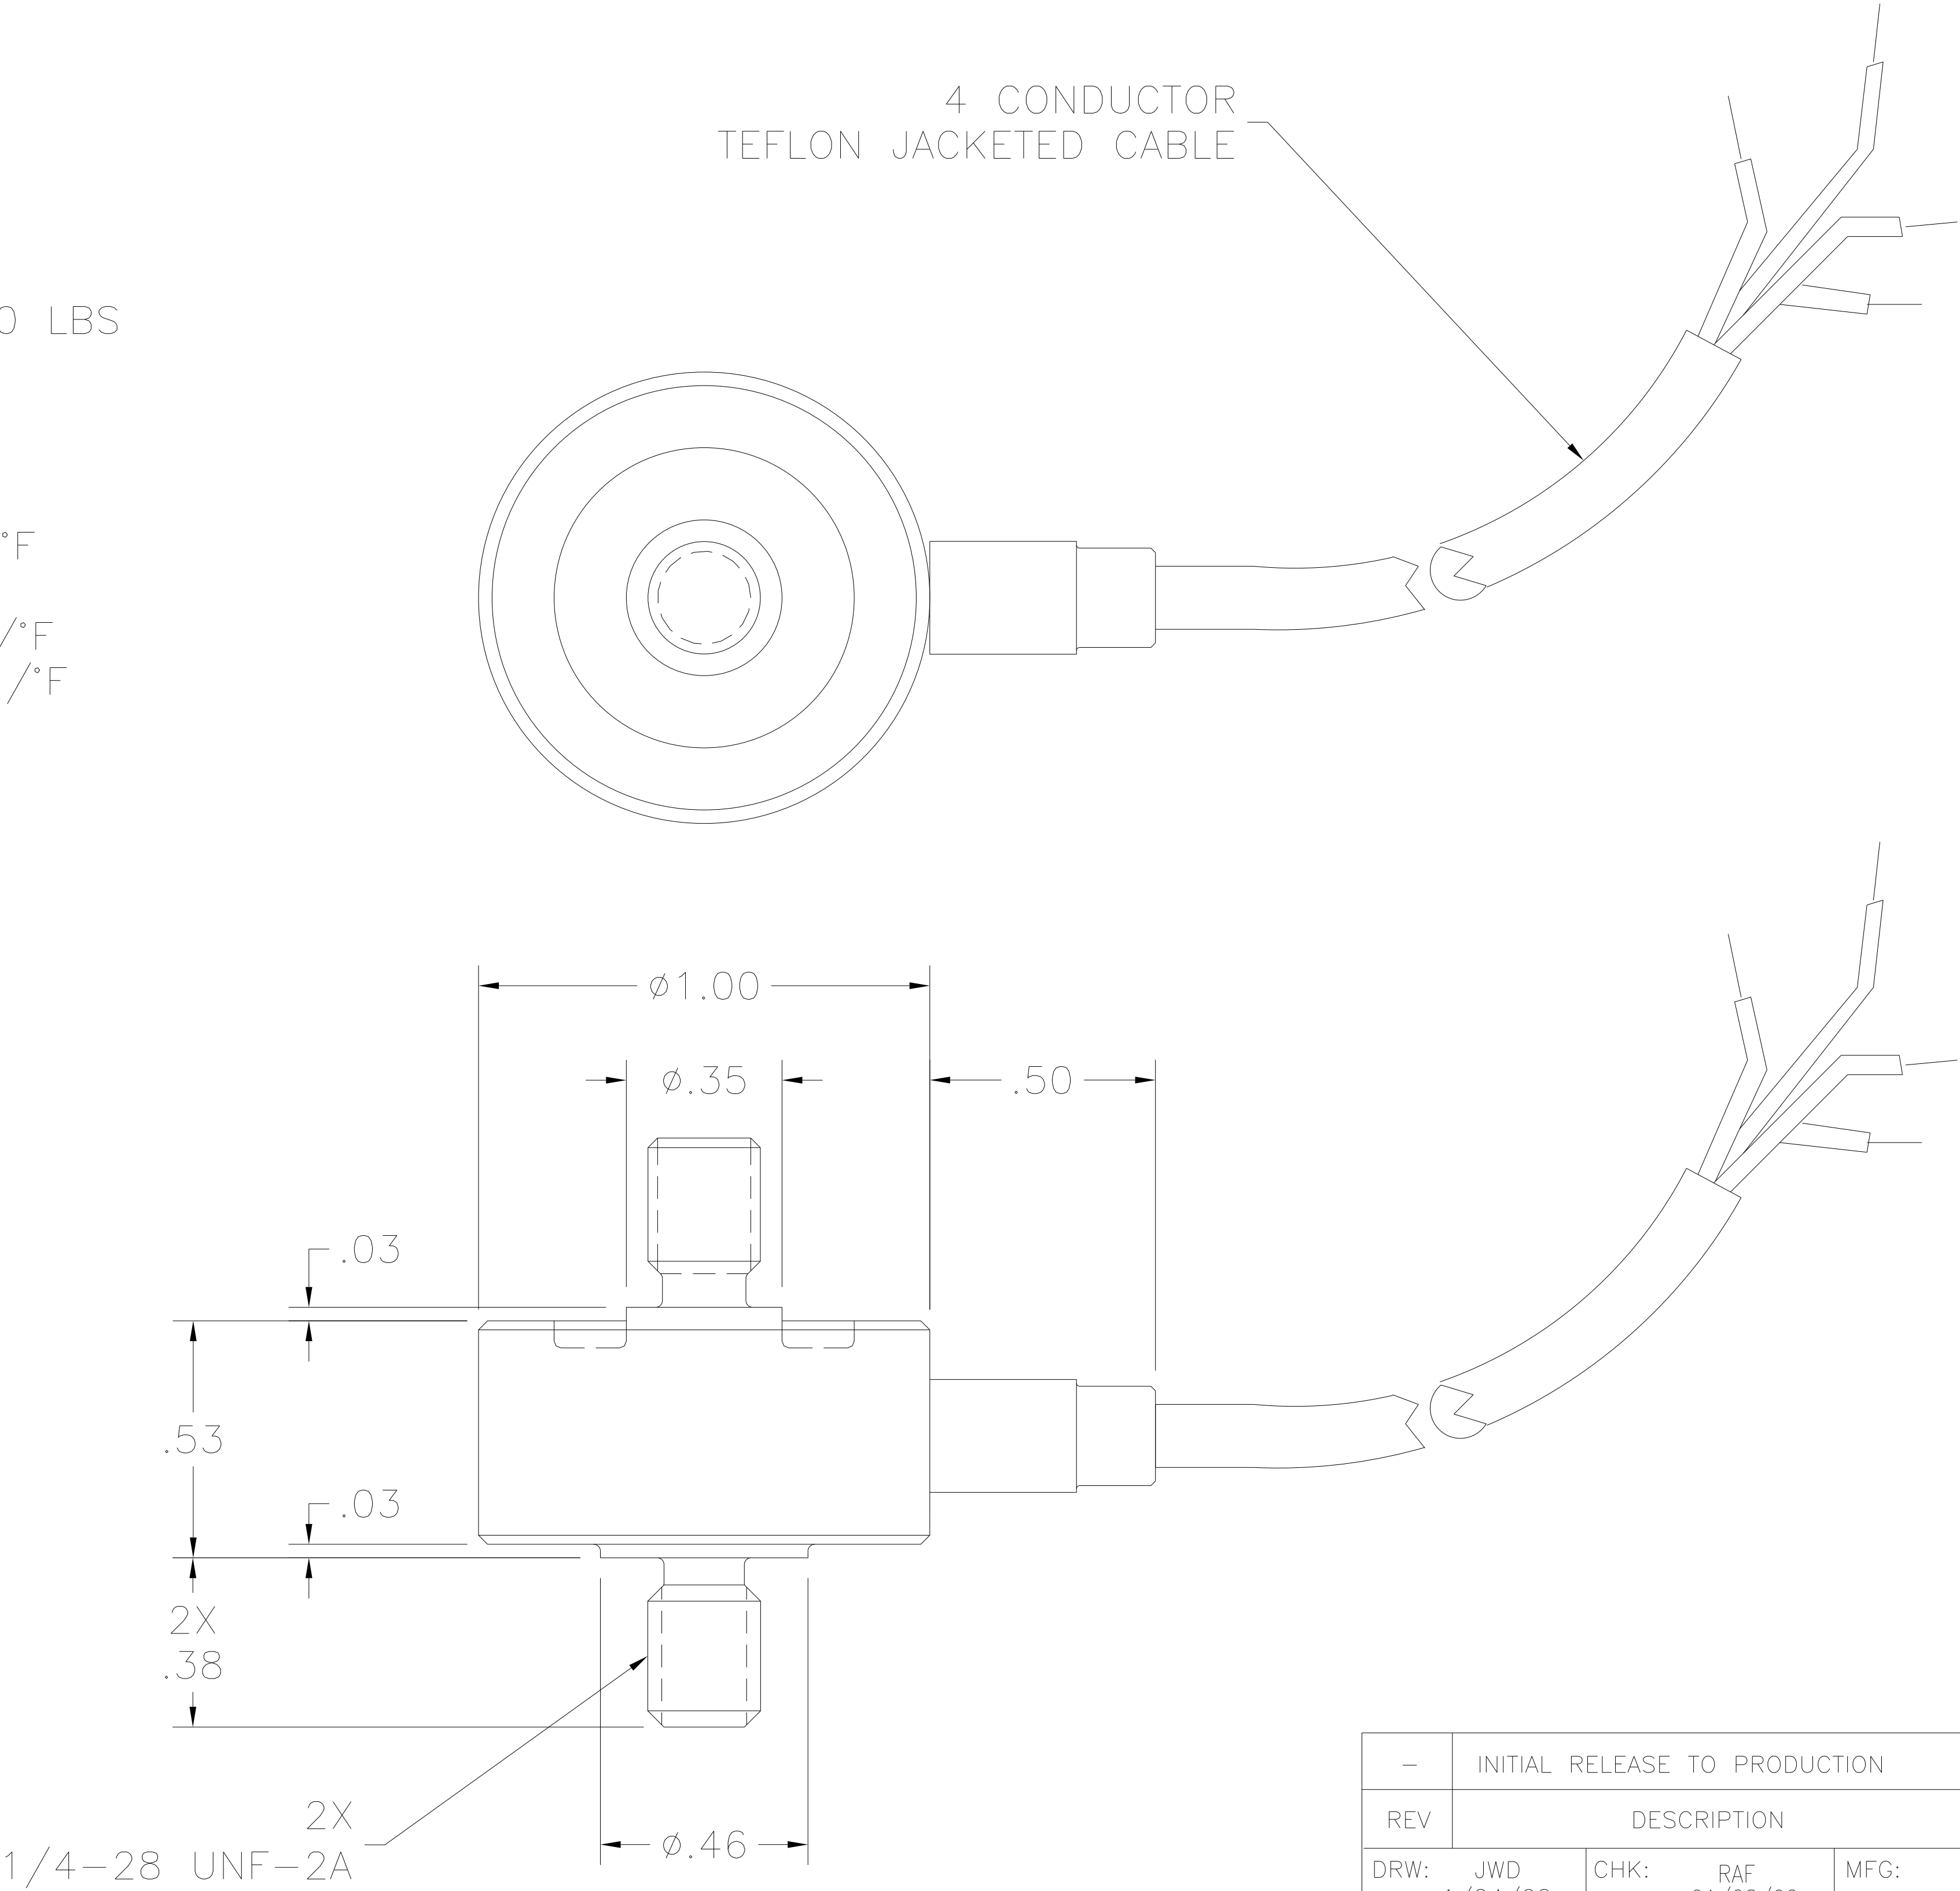

-	INITIAL RELEASE TO PRODUCTION		-	-
REV	DESCRIPTION		REVISED BY	APPROVED BY
DRW:	JWD 1/24/02	CHK: RAF 01/28/02	MFG:	ENG: BDR 01/28/02

SCALE: NONE	<div>SENSOTEC INC.</div> <div>2080 ARLINGATE LANE, COLUMBUS, OHIO 43228</div> <div>© SENSOTEC, INC. ALL RIGHTS RESERVED</div> <div>OUTLINE DWG,MODEL 31,060-1432 SERIES</div> <div>1" OD, 1/4-28 UNF-2A</div>		
.X ±.1			
.XX ±.01			
.XXX			
REV ECN	±.005	63	DOCUMENT NUMBER 000-1432-00
USED ON	±1/2"	SHEET 1 OF 1	