



## RECOMMENDED PANEL CUT-OUT DIMENSIONS

NOTE 1. CONTACT PLATING  
CONTACT AREA: GOLD 0.76  $\mu\text{m}$  MIN.  
TERMINAL AREA: GOLD 0.05  $\mu\text{m}$   
ALL OVER NICKEL UNDERPLATED.

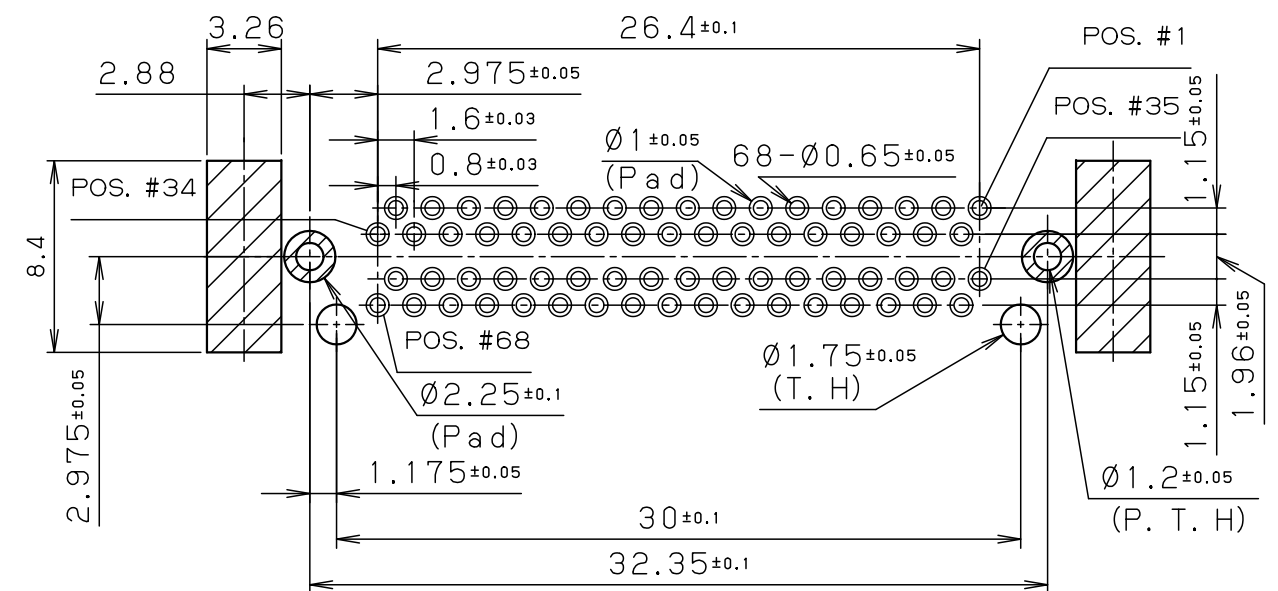

RECOMMENDED P. C. B. LAYOUT  
(MOUNT SIDE VIEW)  Pad

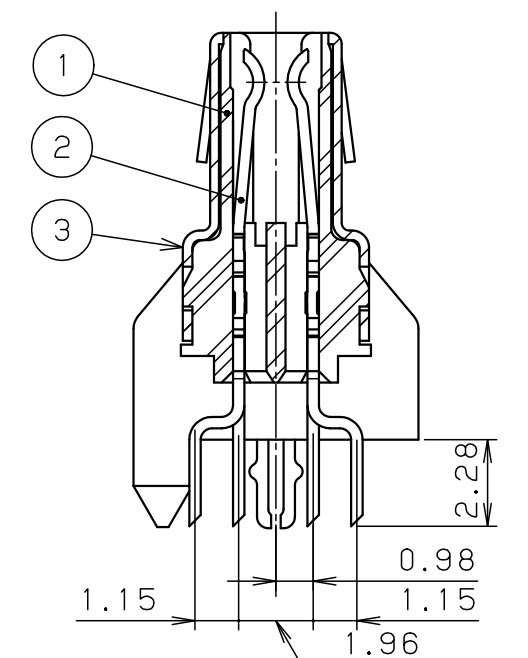

CONTACT DETAIL (5/1)

				5	HOLD DOWN	PHOSPHOR BRONZE	2	NICKEL PLATING	_____	
				4	SQR. NUT	BRASS	2	NICKEL PLATING	M2 x 0 . 4	
△				3	SHELL	STEEL	1	NICKEL PLATING	_____	
△				2	CONTACT	PHOSPHOR BRONZE	68	SEE NOTE 1	_____	
△				1	INSULATOR	P A G T	1	_____	UL 94V-0 BLACK	
LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
DATE Sep.21.2012		SCALE 2 / 1		UNIT mm (INCH)	3RD. A. P		HTK HONDA TSUSHIN KOGYO CO., LTD.			
APP. DATE&REV.										
DR.	DE.	CHK.	CHK.	APP.	NAME		0.8mm SPACING 68POS. FEMALE CONNECTOR			
Y. KATO	Y. KATO	_____	_____	K. KASHIO	PART NO.		HDRA-EC68FDT+			REV. A