

CUSTOMER DRAWING COMPATIBILITY			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING COMPATIBLE, RELEASED		

68-POS VHDCI CONNECTOR

HEATSHRINK TUBING (2 PLACES)  
MAJOR DIAMETER 0.57 [14.48] NOMINAL  
MINOR DIAMETER 0.40 [10.16] NOMINAL

CUSTOM CABLES WITHIN POLYESTER SLEEVE  
DIAMETER 0.38 [9.5] NOMINAL

.23 [5.8]


.14 [3.5]

1.73 [43.9]

2.00 [50.9]  
NO BEND

2.00 [50.9]  
NO BEND

SEE TABLE 1

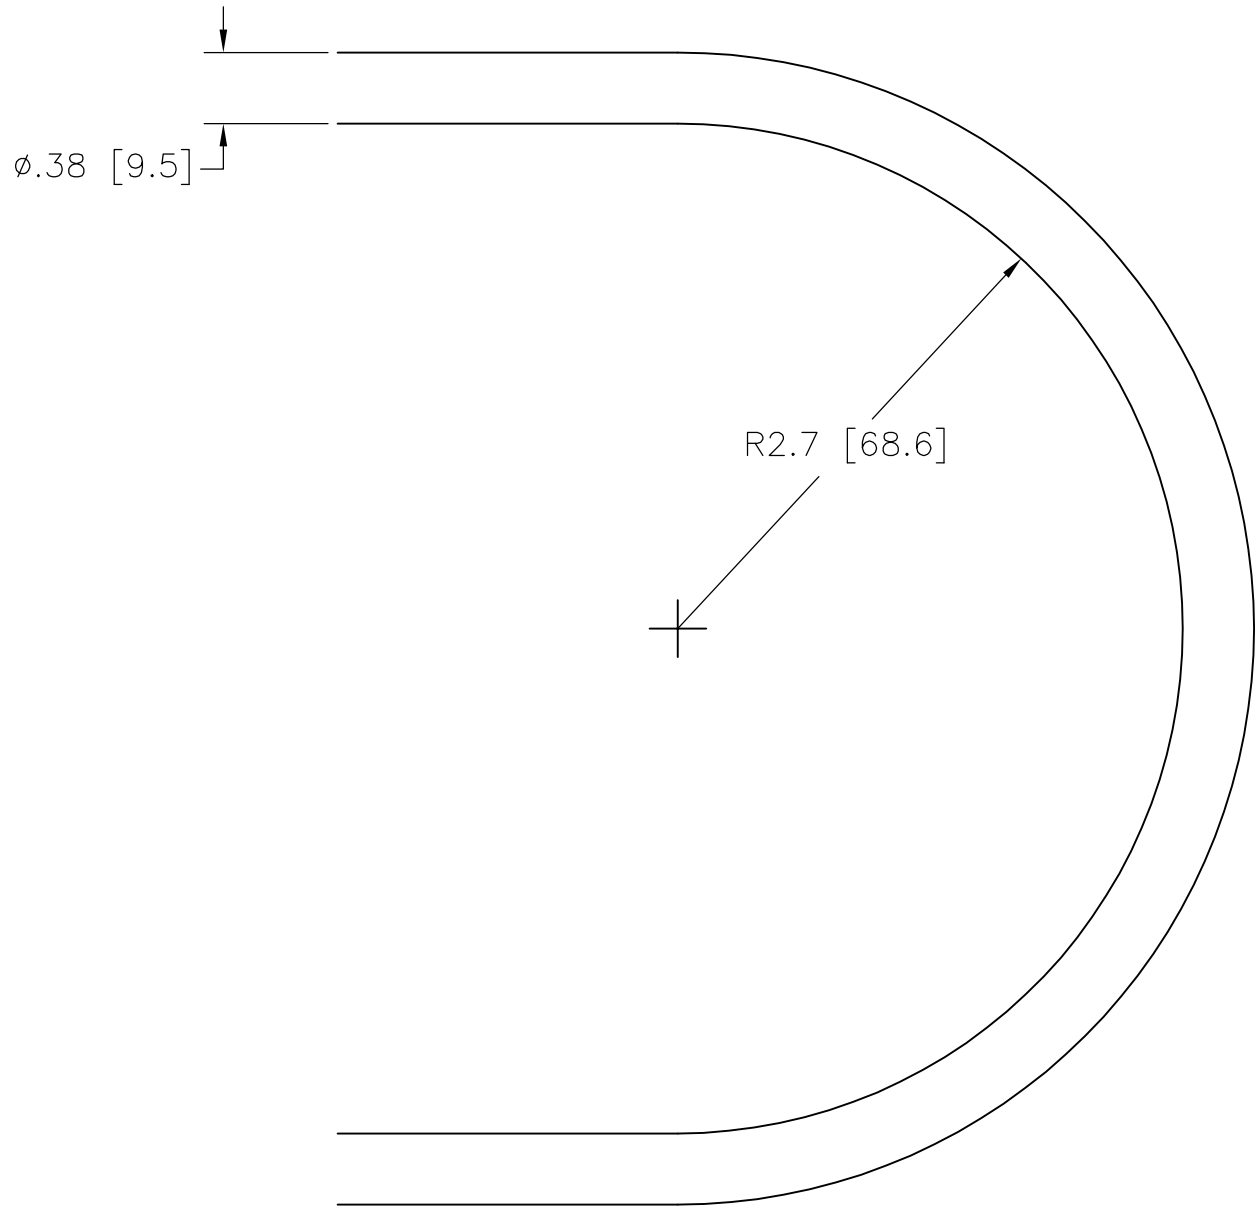

MINIMUM BEND RADIUS

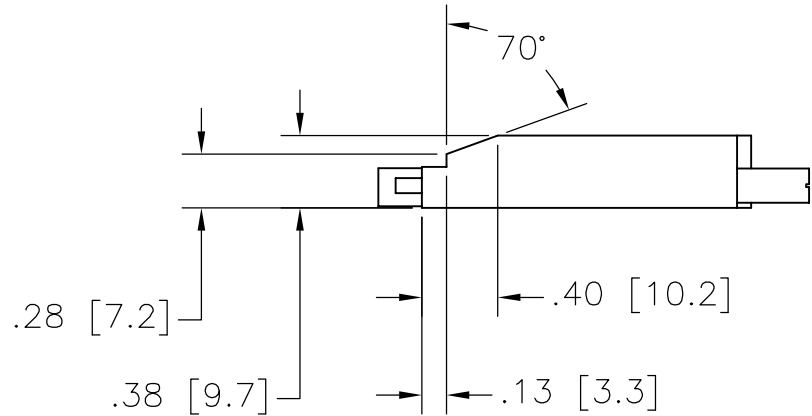
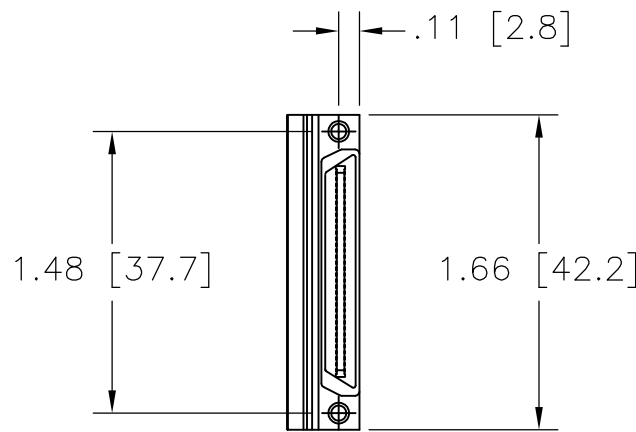


TABLE 1

LENGTH	TOLERANCE
<2M	+5 CM/-0 CM
2 TO 5M	+10 CM/-0 CM
>5M	+15 CM/-0 CM

1. REFER TO PRODUCT MANUAL ON NI.COM FOR MORE DETAILS.

NOTES: UNLESS OTHERWISE SPECIFIED.

CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES AND  
[MILLIMETERS]

DO NOT SCALE DRAWING  
THIRD ANGLE PROJECTION

AUSTIN, TEXAS

TITLE

C68-C68-D4

SIZE	CODE	IDENT NO.	DRAWING NO.
D	7U	296	10/9/17
SCALE: 1/1		SHEET 1 OF 1	