
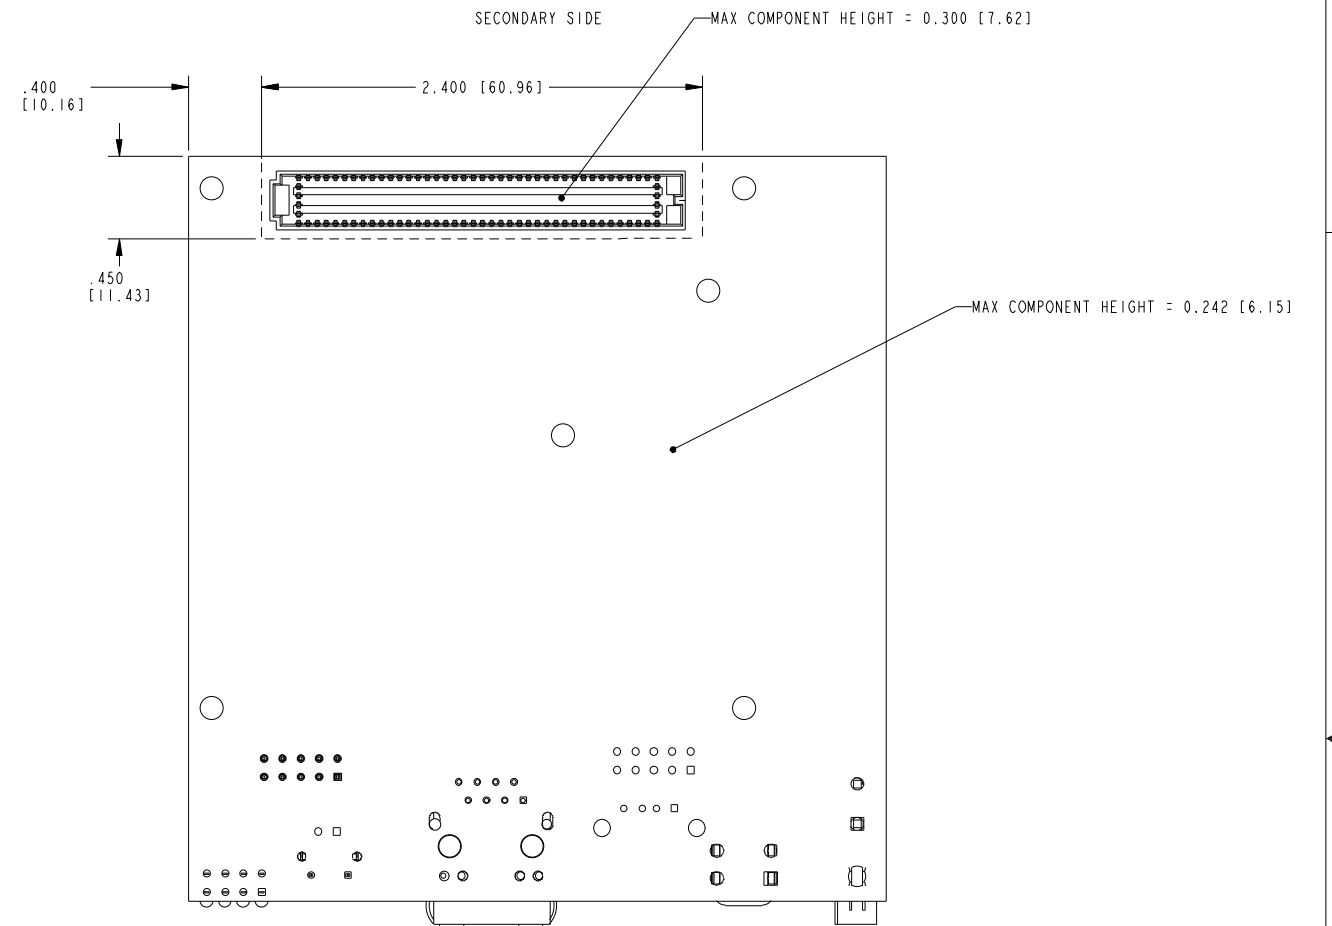
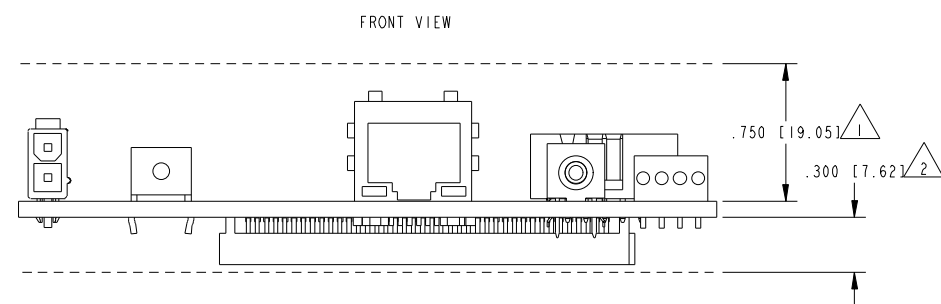


- 6 RECOMMENDED PANEL THICKNESS RANGE IS FROM .032 [0.81] TO .100 [2.54].
- 5 4-40 MAX TORQUE 3.6 IN LBS.
- 4 DAUGHTER CARD COMPONENTS SHOULD NOT EXTEND ABOVE THIS KEEPOUT LINE.
- 3 HOLES AND KEEPOUTS SIZED FOR M3 STANDOFF (4.5 HEX) OR 4-40 STANDOFF (0.1875 HEX). MAX SCREW HEAD OR STANDOFF DIAMETER OF 0.236 [6 MM].
- 2 LATCH ON MATING PLUG REQUIRES CLEARANCE UP TO THIS HEIGHT.
1. REFER TO PRODUCT MANUAL ON NI.COM FOR MORE DETAILS.
- NOTES: UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND [MILLIMETERS].	NATIONAL INSTRUMENTS® AUSTIN, TEXAS	
	TITLE CUSTOMER DRAWING, sbRIO-9605	
	DO NOT SCALE DRAWING THIRD ANGLE PROJECTION	SIZE CODE IDENT NO./MM/DD/YYYY D7U296 08/26/2011
	SCALE: 2/1	SHEET 1 OF 2 CU-SBRI0-9605

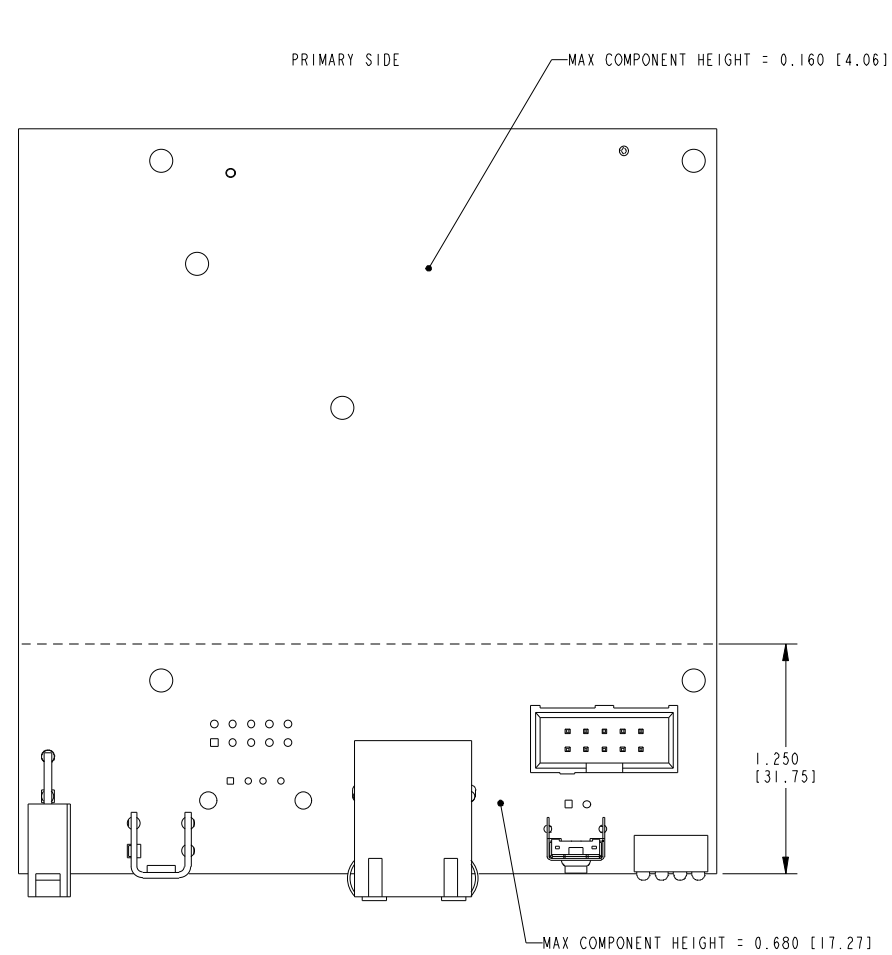

- 2 IT IS RECOMMENDED THAT ADJACENT PCB'S AND SURFACES
BE KEPT .300 [7.62] FROM THE SECONDARY SIDE SURFACE.
- 1 IT IS RECOMMENDED THAT ADJACENT PCB'S AND SURFACES
BE KEPT .750 [19.05] FROM THE PRIMARY SIDE SURFACE.

NOTES: UNLESS OTHERWISE SPECIFIED.