




Voltage references

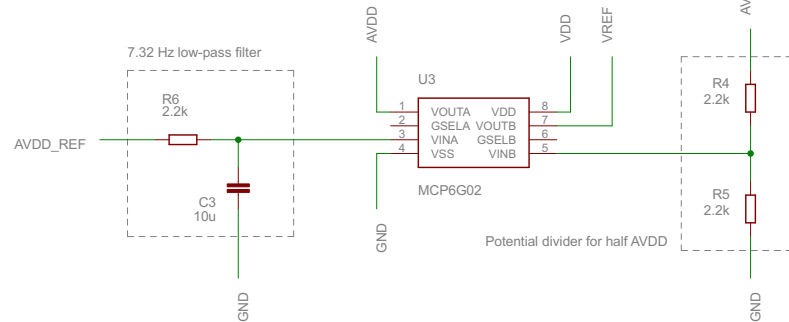

LED drivers


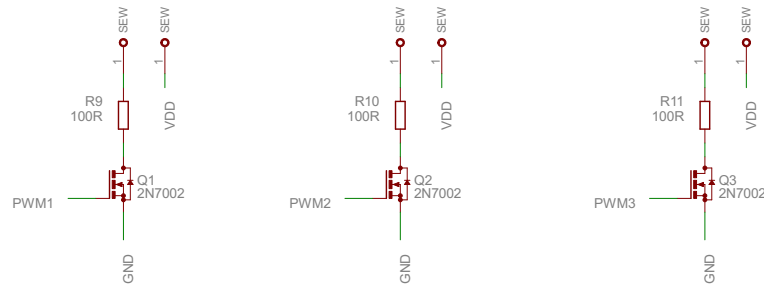


Microphone and preamp

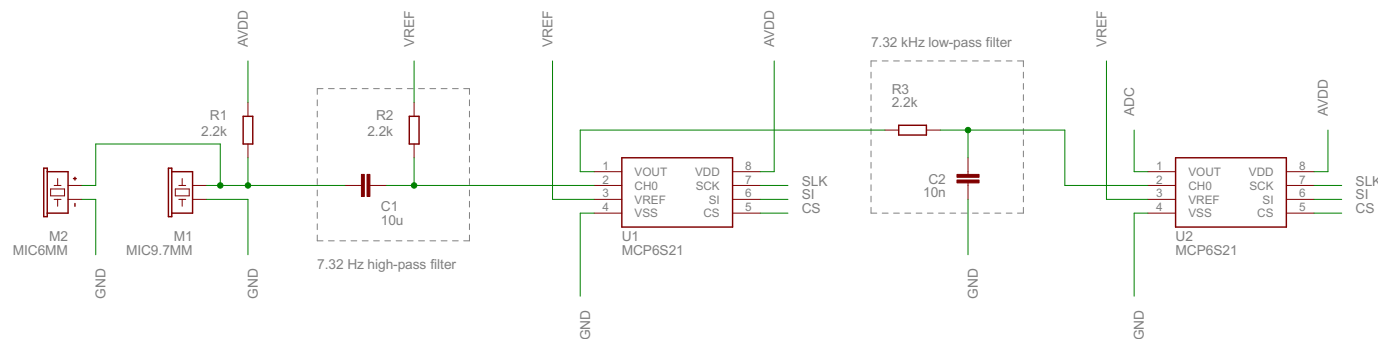


Only one microphone should be populated, M1 or M2
Selectable gains: 1, 4, 25, 64, 100, 256, 1024

PIC24F



Battery and charging

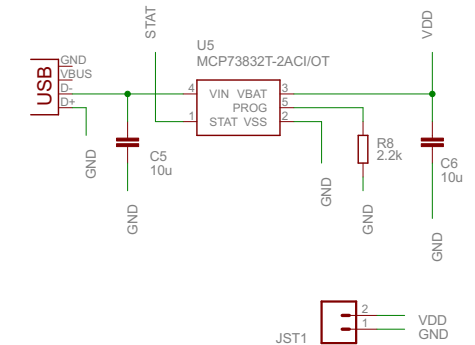

STAT requires PIC24F internal pull-up

Author: Seb Madgwick
v1.0

DressCode
07/05/2013 23:57:29
Sheet: 1/1