




Voltage references

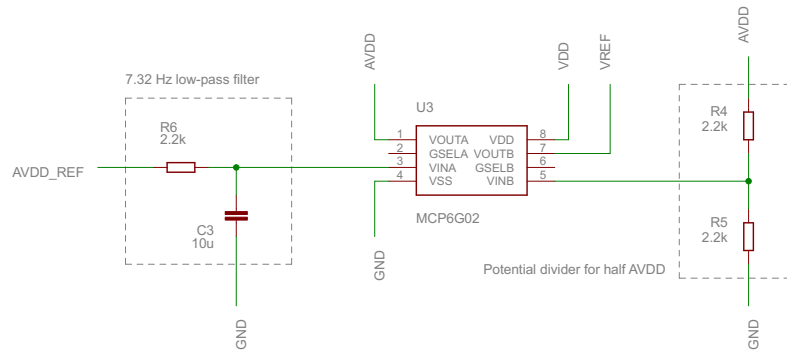

LED drivers

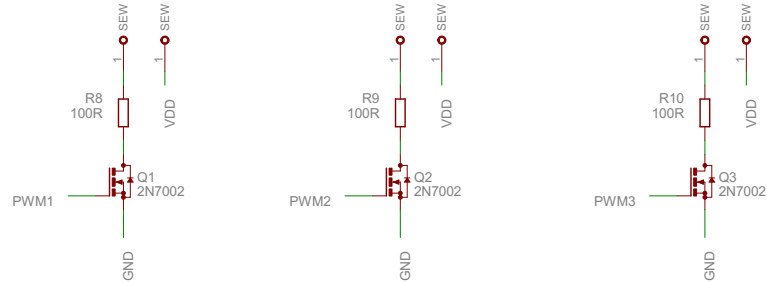

Microphone and preamp


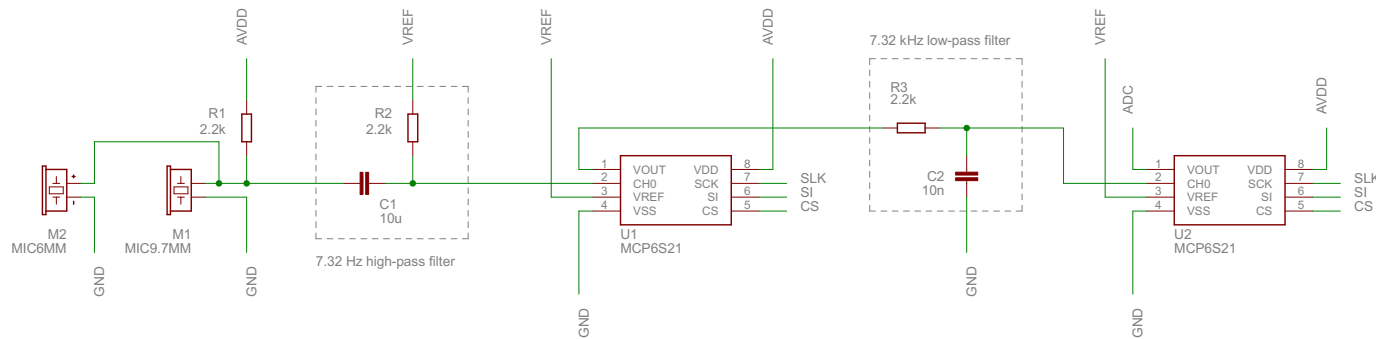


Only one microphone should be populated, M1 or M2
Selectable gains: 1, 4, 25, 64, 100, 256, 1024


PIC24F



PIC24FV32KA304-I/PT



Battery



Author: Seb Madgwick
v1.0

DressCode
29/04/2013 00:10:50
Sheet: 1/1