



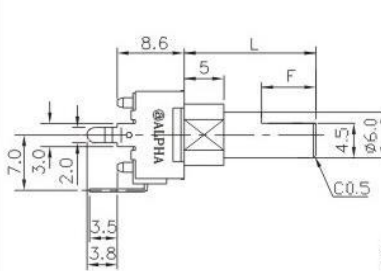


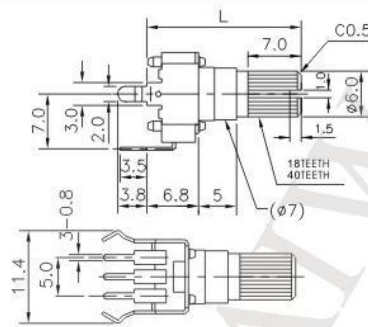


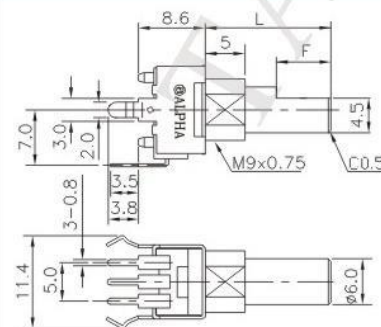



Model	Outline Drawing	Features / Individual Specification						
<div>RV09AF-20 (RV09BF-20)</div> <div></div>	<div></div> <div>SHAFT SHOWN IN FULL C.C.W. POSITION</div>	<div></div> <div>P.C.B. MOUNTING HOLE DETAIL</div> <table><tr><th>MODEL</th><th>H</th></tr><tr><td>RV09A(B)-20</td><td>10.0</td></tr><tr><td>RV09A(B)-21</td><td>6.5</td></tr></table>	MODEL	H	RV09A(B)-20	10.0	RV09A(B)-21	6.5
MODEL	H							
RV09A(B)-20	10.0							
RV09A(B)-21	6.5							
<div>RV09AF-40E1N (RV09BF-40E1N) 塑膠軸套 Plastic Bushing - No Thread</div> <div></div>	<div></div> <div>SHAFT SHOWN IN FULL C.C.W. POSITION</div>	<div></div> <div>P.C.B. MOUNTING HOLE DETAIL</div>						
<div>RV09ACF-40 (RV09BCF-40)</div> <div></div>	<div></div> <div>SHAFT SHOWN IN FULL C.C.W. POSITION</div>	<div></div> <div>P.C.B. MOUNTING HOLE DETAIL</div>						
<div>RV09AF-40E1 (RV09BF-40E1)</div> <div></div>	<div></div> <div>SHAFT SHOWN IN FULL C.C.W. POSITION</div>	<div></div> <div>P.C.B. MOUNTING HOLE DETAIL</div>						

SPECIFICATION

MECHANICAL

TOTAL ROTATION ANGLE

RV09AF & RV09ACF SERIES $280^{\circ} \pm 5^{\circ}$

RV09BF & RV09BCF SERIES $300^{\circ} \pm 5^{\circ}$

ROTATION TORQUE

10-100 gf.cm

SHAFT STOP STRENGTH

3kgf.cm/Min

ROTATION LIFE

with click: 5,000 cycles, w/o click: 10,000 cycles.

CLICK TORQUE

20-120gf.cm

ELECTRICAL

RATED WATTAGE

0.05W

RATED VOLTAGE

50V AC