

1

2

3

4

5

6

A

A

B


B

C

C


D

D

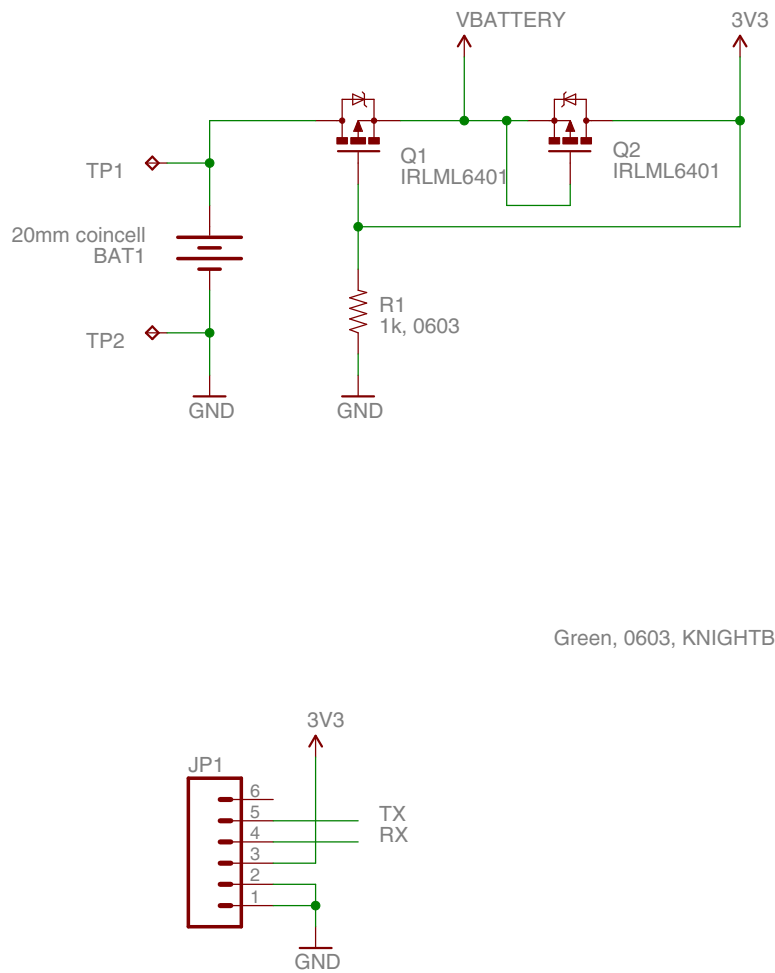

NOTE:

The mean GNS-902 VBACKUP current was measured as 7 uA or 130 uA if VCC is powered. The FET circuit ensures that current drawn from the battery is zero when VCC is powered.

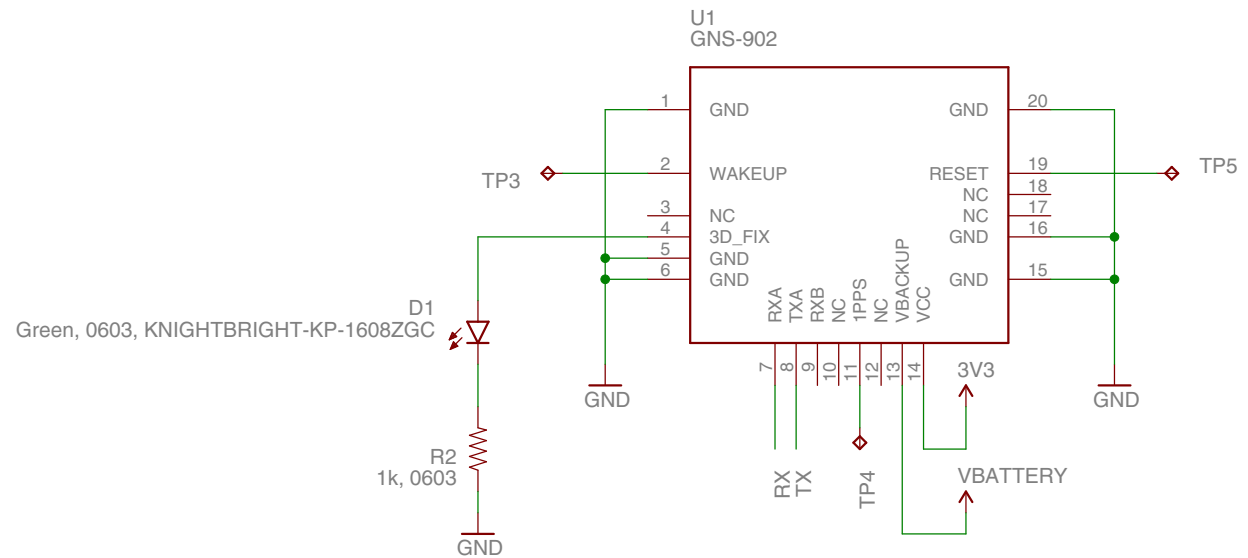

Project: GNS 902 Carrier Board

Version: v1.2

Date: 01/10/2015 16:59

Sheet: 1/1

Author: Seb Madgwick, x-io Technologies Limited

1

2

3

4

5

6