

## Optimal Power Allocation – Ride to The Future

### Summary

Who would have thought that the champion of the Tokyo Olympics cycling time trial was a mathematician? Believe it or not, math does it. In this paper, we will build a mathematical model of the power curve to help riders win races.

**In Task 1**, we build a power-duration model based on biological principles. This model has three stages: Extreme, Severe, Heavy. After substituting the searched rider data into the model, we plot the power curves of the sprinter and time trial specialist of different genders.

**In Task 2**, we first use the power curve in **In Task 1** to build the Human Energy Expenditure Model, which describes the rider's constraints on energy limits. We analyzed the dynamic bicycle model to determine the  $P_{out} - v$  relationship during cycling. By analyzing the characteristics of the track, we establish a piecewise nonlinear programming model with a wide range of applications for straights, curves, and slopes. For large slope segments or sharp bends, we made detailed calculations individually. Finally, the optimal output power curves of the riders when riding on the three courses in Task 1 are solved by Mathematica. The completion times are shown in the table below. Compared with the champion, our model lags within 6%, reflecting the model's accuracy.

| Course        | Male     |            | Female   |            |
|---------------|----------|------------|----------|------------|
|               | Sprinter | Time Trial | Sprinter | Time Trial |
| Self-designed | 48.58    | 46.48      | 48.58    | 47.53      |
| Japan         | 40.97    | 62.68      | 33.63    | 56.03      |
| Belgium       | 59.62    | 58.15      | 54.05    | 53.03      |

After the model is solved, we perform sensitivity analysis in **Task 3** and **Task 4**. For weather factors, we focus on the effects of wind speed and direction. When the wind speed changes within  $\pm 2$  m/s and the direction changes within  $\pm 180^\circ$ , we get the change graph of the output power with Python. We conclude that the model is robust as its sensitivity to crosswinds is within 1%. And it has a 10% impact on headwinds, which provides us with ideas for team competition strategies.

We also tested the model's sensitivity to rider deviations. Taking the Belgian track as an example, we establish the riders' actual output power function  $\overline{P_{out}}$  and add a random disturbance term  $\widetilde{P_{out}}$  to simulate the randomness of the rider. After calculation, the riders can finish the race before they run out of energy. The time lag is within 2%.

Inspired by the model's high sensitivity to headwind, we develop a team time trial strategy in **Task 5**. The results are shown in the table below.

| Stage     | Balance (48%)     | Storage (27%) | Sprint (25%)     |
|-----------|-------------------|---------------|------------------|
| Formation | Pyramid formation | Linear array  | Shield formation |

Finally, we write to Directeur Sportif with a race guidance for time trial specialists and sprinters.

**Keywords:** power curve, nonlinear programming, dynamics model, formation planning

# Contents

|          |                                                                         |           |
|----------|-------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>Introduction</b>                                                     | <b>3</b>  |
| 1.1      | Restatement of the Problem . . . . .                                    | 3         |
| 1.2      | Literature Review . . . . .                                             | 4         |
| 1.3      | Our Work . . . . .                                                      | 4         |
| <b>2</b> | <b>Assumptions and Justification</b>                                    | <b>4</b>  |
| <b>3</b> | <b>Notations</b>                                                        | <b>5</b>  |
| <b>4</b> | <b>Three stage power-duration models</b>                                | <b>5</b>  |
| 4.1      | The Establishment of power-duration model . . . . .                     | 6         |
| 4.2      | The Solution of Power-Duration Model . . . . .                          | 7         |
| <b>5</b> | <b>Piecewise Nonlinear Programming for Time Trial</b>                   | <b>7</b>  |
| 5.1      | The Establishment of Human Energy Expenditure Model . . . . .           | 7         |
| 5.2      | The Mathematical Relationship Between Power Output And Speed . . . . .  | 8         |
| 5.3      | The Racing Strategy of Self-designed course . . . . .                   | 9         |
| 5.3.1    | Analysis of Riding Strategies on Curved Roads . . . . .                 | 10        |
| 5.3.2    | improvement of the Strategies on Curved Roads . . . . .                 | 10        |
| 5.3.3    | Analysis of Straight Riding Strategy . . . . .                          | 12        |
| 5.4      | The Strategy of 2021 UCI World Championship time trial course . . . . . | 13        |
| 5.4.1    | The Strategy of Straight and Ramp Riding in Belgium course . . . . .    | 14        |
| 5.4.2    | The Strategy of Turning in Belgium course . . . . .                     | 15        |
| 5.5      | The Strategy of 2021 Olympic Time Trial course . . . . .                | 16        |
| 5.5.1    | The Strategy for Regular Road Sections in Japan . . . . .               | 16        |
| 5.5.2    | The Strategy for Special Road Sections in Japan . . . . .               | 17        |
| 5.5.3    | The Improved Strategies . . . . .                                       | 18        |
| <b>6</b> | <b>Sensitivity Analysis</b>                                             | <b>20</b> |
| 6.1      | Sensitive Analysis of Weather . . . . .                                 | 20        |
| 6.2      | Slope Gradient Sensitivity Analysis . . . . .                           | 21        |
| 6.3      | Sensitive Analysis of Rider Deviations . . . . .                        | 22        |
| <b>7</b> | <b>Further Discussion of The Team Time Trial</b>                        | <b>22</b> |
| <b>8</b> | <b>Further Discussion of The Team Time Trial</b>                        | <b>23</b> |
| <b>9</b> | <b>Model Evaluation and Further Discussion</b>                          | <b>25</b> |
| 9.1      | Strengths . . . . .                                                     | 25        |
| 9.2      | Weaknesses . . . . .                                                    | 25        |
| 9.3      | Conclusion . . . . .                                                    | 25        |

# 1 Introduction

## 1.1 Restatement of the Problem

Cycling is characterized by high power output over a period. This capability can be summarized by a power curve representing the maximum power a cyclist has generated over time. Due to the limited endurance of humans, the power curve generally slopes downward to the right, as shown in Figure 1.

The power curve is used to specify pacing strategies for different courses. And it can prevent the rider from incurring significant energy losses on impulse. This can be useful in any cycling race requiring pacing, such as a time trial, Strava segment, or mid-race climb. Using different riding powers on different road conditions can help riders store energy for sprints and win races.

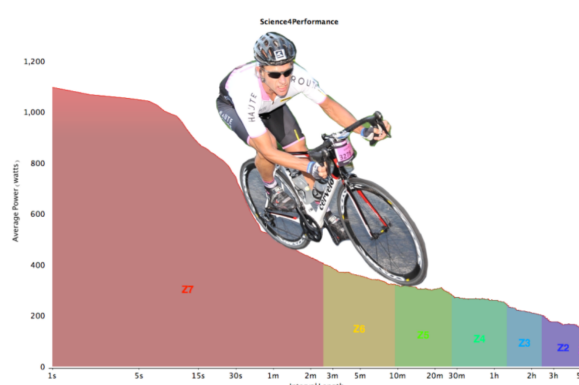


Figure 1: Power curve

We are developing a mathematical model for different types of cyclists. This model is limited by the total energy a cyclist can expend, focusing on several characteristics of the cyclist, such as the riding capacity, the position of the rider, and the output power of the rider. Based on the above understanding, we need to solve the following problems:

- Define the power curve of a time trial specialist and a sprinter, and consider the genders.
- Use each power profile defined in Task 1 to apply the model to the following time trial.
  - 2021 Olympic Time Trial course in Tokyo, Japan,
  - 2021 UCI World Championship time trial course in Flanders, Belgium,
  - At a minimum, a self-designed track that includes at least four sharp turns and a nontrivial road grade. The end of the course should be near its start point.
- Determine the model's sensitivity to weather factors, including wind speed and direction.
- Analyze how sensitive the results are to rider deviations from the target power distribution.
- Further, discuss extending the model to a six-player team time trial and get the best results. Team time is determined by when the fourth rider crosses the finish line.
- Write a two-page rider's race guidance for a Directeur Sportif of a team, which should focus on the result of a time trial course and a rider. It needs to include a model summary and an overview of directions. Readers are people with no mathematical background.

## 1.2 Literature Review

Power profiling has always been a scorching area of cycling research. Since the invention of the power meter in the late 1980s, some researchers have selected a power-duration model that best describes the training intensity range of athletes. For example, the two-parameter CP model [6] is only suitable for the severe exercise intensity domain. However, much power output falls within the high exercise intensity domains. So this model does not provide a fair generalization of the cyclist's power curve. This also shows that different examples maybe require different modeling approaches.

With the development of physiology, there has been a growing awareness that a power curve can be divided into three different exercise intensity domains: Extreme, Severe, and Heavy [3]. And it provides a comprehensive approach to studying tolerable exercise limits. Previous research has shown that the anaerobic power reserve (APR) can well predict short-term (<3 min) power outputs in the extreme exercise intensity domain [12]. In the severe exercise intensity domain, the CP models are mainly used. There is also a three-parameter CP model [7]. Currently, a full-power model exists for the heavy exercise intensity domain [9].

## 1.3 Our Work

We set up two models based on the assumptions and literature, including the three-stage power curve and dynamic bicycle models. The power curve model's three stages are Extreme, Severe, and Heavy, characterized by distinct human physiological responses. The dynamic bicycle model is based on physics principles and describes the influence of weather factors on the power output. We then tested the model on different riders and tracks, with good results. Finally, we designed the team time trial formation to make our model more applicable.

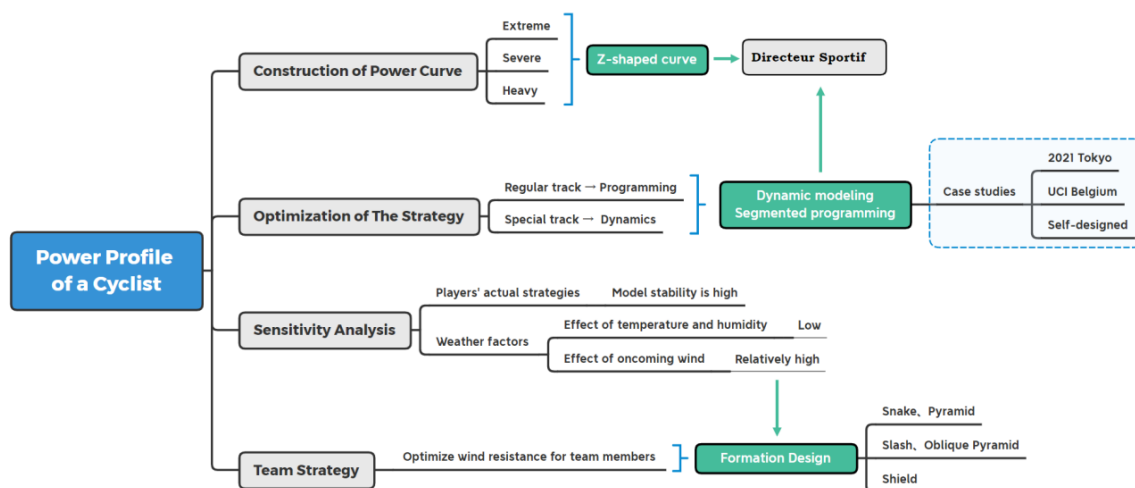


Figure 2: The structure of our paper

## 2 Assumptions and Justification

Through a complete analysis of the problem, in order to simplify our model, we make the following reasonable assumptions.

**Assumption 1:** Assuming that the temperature and humidity of the cyclist's competition



venue are suitable, and the fluctuation range is small. Take the temperature range of 67.6 – 75.6 °F and the humidity range of 35.1 – 45.9%.

First, considering that most of the major cycling competitions, including the two cycling competitions given by the problem, are held in July-September. Then check the past weather conditions and find that the temperature and humidity of the arena are relatively suitable.

**Assumption 2: Assuming that cyclists in different physical states, ride with the same power for the same time, they consume the same amount of energy.**

The principle of physical strength distribution of professional athletes at different stages during the competition is mostly based on the model of lactic acid accumulation and ATP conversion [4]. These models have linear properties in explaining human energy expenditure [10].

**Assumption 3: Assuming that cyclists lose a constant 5% of their energy during cycling.**

The cyclist is the engine providing the power. Friction in the drive train (chains, gears, bearings, etc.) causes a small amount of loss, usually around 5% [8], assuming the bicycle has a clean and nicely lubricated drivetrain.

### 3 Notations

The key mathematical notations used in this paper are listed in Table 1

Table 1: Notations used in this paper

| Symbol      | Definitions                                   | Units |
|-------------|-----------------------------------------------|-------|
| $CP$        | Critical power                                | W/kg  |
| $W'$        | Work capacity above critical power            | J/kg  |
| $\lambda_E$ | The cyclist's remaining energy / upper energy | /     |
| $P_{out}$   | The output power of rider                     | W/kg  |
| $t_n$       | Completion time                               | s     |
| $v_{wind}$  | Wind speed                                    | m/s   |

### 4 Three stage power-duration models

As a source of parameters for power curve calculations and track-specific decisions, power profiles should demonstrate important biological parameters for bike racing of all types of riders. Based on this premise, we combine the literature review mentioned above to analyze various parameter characteristics of existing models. In the end, we select a sprinter and time trial specialist as our main subjects. We also calculate the parameters  $CP$ ,  $W'$ , etc., which can help get the power curve. ,etc., which can help get the power curve.

Next, we obtain the maximum power that can be maintained by different cyclists when they ride for 5s, 1min, 3min, 5min, 12min, and one has the data source for parameter calculation. We also consult the relevant website to obtain the calculation method of the Maximum aerobic power  $MAP_{TTF}$  and the value of at the end of every stage.

Finally, we calculated the results and presented the power profile in a tabular format, with a graph showing the power curves for both athletes of different genders.

## 4.1 The Establishment of power-duration model

First, we use  $CP$  to represent the critical power of a cyclist. Critical power means the power output that cyclists tend to ride at high intensity, usually lasting 30 to 40 minutes. We then use  $W'$  to represent the work (in  $J/kg$ ) that the cyclist can expend above  $CP$  before fully depleting energy.

Due to the complex metabolism of the human body, and the research on related biomechanics and biochemical reactions during exercise is also pending breakthroughs. Therefore, the calculation of  $CP$ ,  $W'$  is generally obtained from experimental data. It can be seen from the literature [1] that the calculation formulas of  $CP$  and  $W'$  are as follows:

$$CP = \frac{12 \cdot P_{12} - 3 \cdot P_3}{9} \quad (1)$$

$$W' = 0.24s \cdot (P_3 - P_{12}) \quad (2)$$

where  $P_3$  is the average power of a cyclist who rides hard for three minutes divided by his mass, while  $P_{12}$  is the same as  $P_3$  but for 12 minutes. And we also have the formula of  $MAP_{TTF}$ :

$$MAP_{TTF} = \frac{W'}{P - CP} + \frac{W'}{P_{\max} - CP} \quad (3)$$

where  $P_{\max}$  is ultimate power. According to relevant information [1], we estimate that  $P_{\max} \approx P_{5s}$ . Integrating the formulas above, we get the following table:

Table 2: The power profile of different types of riders I

| Race                  | Gender | 5s    | 1min | 3min | 5min | 12min |
|-----------------------|--------|-------|------|------|------|-------|
| Sprinter              | M      | 21.03 | 9.09 | 6.95 | 4.81 | 4.70  |
|                       | F      | 16.40 | 7.39 | 6.17 | 4.17 | 4.13  |
| Time Trial Specialist | M      | 16.89 | 8.74 | 7.14 | 5.53 | 5.46  |
|                       | F      | 13.39 | 7.11 | 5.85 | 4.83 | 4.75  |

Table 3: The power profile of different types of riders II

| Race                  | Gender | FTP  | CP   | W'   | $MAP_{TTF}$ | $CP_{TTF}$ |
|-----------------------|--------|------|------|------|-------------|------------|
| Sprinter              | M      | 3.91 | 3.94 | 0.54 | 1.10        | 33.79      |
|                       | F      | 3.39 | 3.45 | 0.49 | 0.99        | 32.60      |
| Time Trial Specialist | M      | 4.98 | 4.90 | 0.40 | 0.97        | 40.29      |
|                       | F      | 4.38 | 4.38 | 0.26 | 0.92        | 34.41      |

According to the different exercise time and the characteristics of various athletes in different stages, we refer to the literature review to solve the power curve in three stages. Its scope and calculation model are shown in the following table:

Table 4: Three stage power-duration models

| Stage     | Model                            | Equation                                                                                                                            | Range                             |
|-----------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| I.Extreme | Anaerobic power reserve          | $P(t) = P_3 + (P_{\max} - P_3) \cdot e^{-kt}$                                                                                       | $t < MAP_{TTF}$                   |
| II.Severe | 2-parameter critical power model | $P(t) = \frac{W'}{t} + CP$                                                                                                          | $t > MAP_{TTF}$<br>$t < CP_{TTF}$ |
| III.Heavy | Omni power duration model        | $P(t) = \frac{W'}{t} \cdot \left(1 - e^{t \cdot \frac{CP - P_{\max}}{W'}}\right) + CP - A \cdot \ln\left(\frac{t}{CP_{TTF}}\right)$ | $t > CP_{TTF}$                    |

(Combining curve continuity, take  $k=0.7$ ,  $A=0.1$ )

## 4.2 The Solution of Power-Duration Model

Then we combine Equation 1, Equation 2 and the data in Table 2 together with the data in Table 3, and substitute them into the formula in Table 4. We use Mathematica to calculate and draw the curve to get the following power curve in Figure 3.

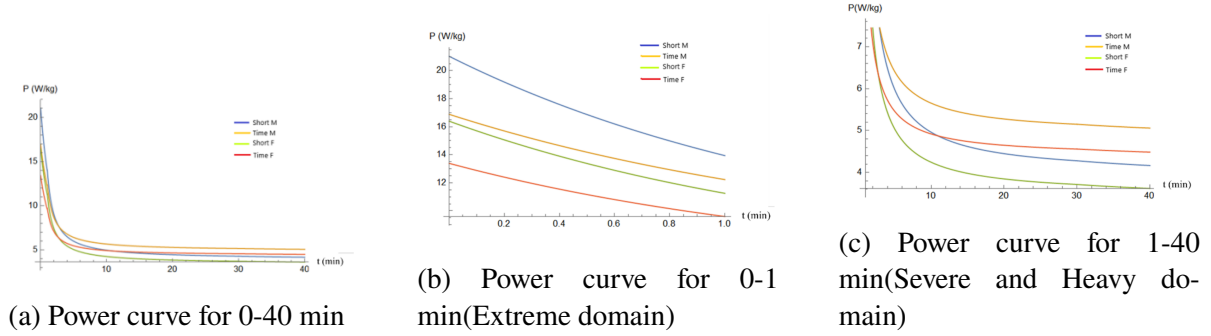


Figure 3: The power curve of different types of rider

Looking at the curves, in the same event, the power curve of male cyclists is always above the power curve of female cyclists. This is consistent with the pattern of better physical strength in male cyclists. In addition, in terms of short bursts ( $t < 1s$ ), the power of the sprinter was significantly higher than that of the time trial specialist. In the middle- and long-distance riding competitions, the time trial specialist are better.

## 5 Piecewise Nonlinear Programming for Time Trial

### 5.1 The Establishment of Human Energy Expenditure Model

To apply the power curve model established in Task 1 to the courses, we next derive a human energy expenditure model suitable for the problem background.

Let  $m \cdot P_{out}$  be the power output by the cyclist at time  $t$ , where  $m$  is the weight of the cyclist, and  $P_{out}$  is the output power per unit mass of the cyclist.

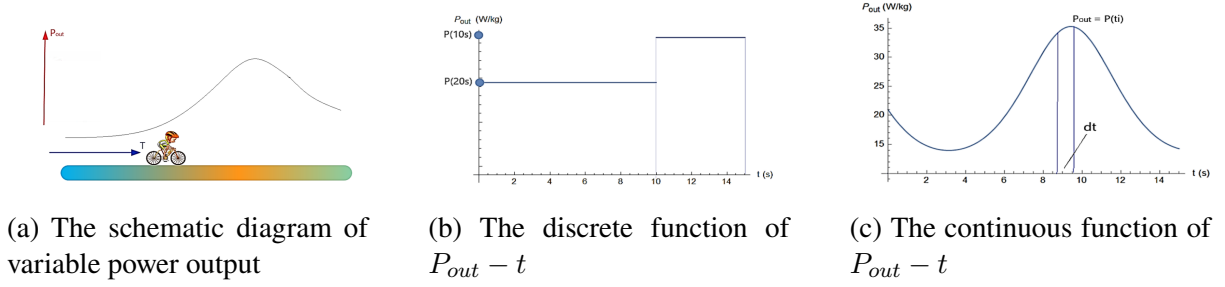


Figure 4: The illustration of Task 2

According to Assumption 2, we calculate in proportion to the total energy consumed. For the power discrete values shown in the middle of Figure 4, the ratio of the cyclist's remaining energy to the upper energy limit is expressed as follows:

$$\lambda_E = \frac{E_R}{E_m} = 1 - \sum_i \frac{\Delta t_i}{T_i} \quad (4)$$

where  $T_i$  is the longest holding time of the current power when the body is full of energy. In the middle of Figure 4, the result of  $\lambda_E$  is  $\lambda_E = 1 - \frac{10s}{20s} - \frac{5s}{10s} = 0$ .

However, when solving practical problems, it is impossible for cyclists to strictly follow a detailed plan of the optimization solution. This can lead to cyclists hitting their fitness limits before they finish the race. Therefore, we reduce the 1 on the right side of the equation to 0.95, leaving 5% of the remaining stamina to deal with the above situation.

Change the discrete model to continuous. For the continuity  $P_{out}(t)$  shown in the right of Figure 4, cut an approximate rectangle with a width of  $dt$ , and the height of the rectangle is  $T(P_{out})$ . Next, replace the summation with the integral to get the formula for  $\lambda_E$  at time  $t$

$$\lambda_E(t) = 1 - \int_0^t \frac{d\tau}{T(P_{out}(\tau))} \quad (5)$$

where  $T(P)$  is the inverse function of the power curve expression  $P(t)$ , i.e.,  $T(P) = P^{-1}(P)$ .

If the cyclist just uses up his energy when he reaches the finish line, the following constraint exists:

$$1 - \lambda_E(t) = \int_0^t \frac{d\tau}{T(P_{out}(\tau))} = 1 \quad (6)$$

However, when solving practical problems, it is impossible for cyclists to strictly follow a detailed plan of the optimization solution. This can lead to cyclists hitting their fitness limits before they finish the race. Therefore, we reduce the 1 on the right side of the equation to 0.95, leaving 5% of the remaining stamina to deal with the above situation.

## 5.2 The Mathematical Relationship Between Power Output And Speed

We conduct a dynamic analysis on the bicycle, the force diagram is shown in the Figure 5a, and the following formula is established:

$$F_{total} = (F_{roll} + F_{slope} + F_{accel} + F_{wind}) / \eta \quad (7)$$

where  $F_{\text{total}}$  is the athlete's active force,  $F_{\text{roll}}$  is the rolling friction force,  $F_{\text{accel}}$  is the inertial force generated by the acceleration,  $F_{\text{wind}}$  is the aerodynamic resistance, and  $F_{\text{slope}}$  is the slope resistance. (negative value when going downhill). According to assumption 3, we set  $\eta$  as the driving efficiency, which is 95%.

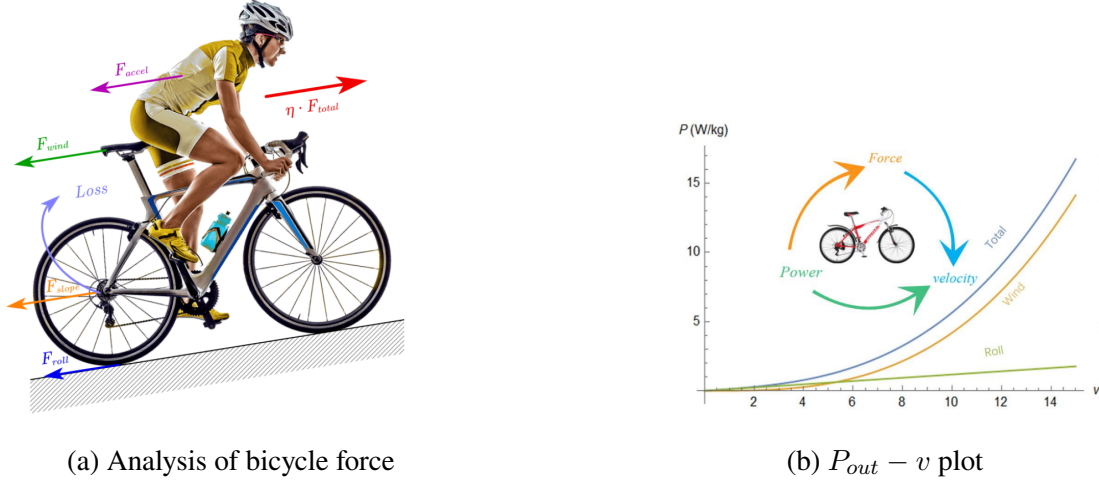


Figure 5

According to the principles of physics, the calculation formulas of various physical quantities are as follows:

$$F_{\text{roll}} = C_r \cdot Mg \quad (0.0015 < C_r < 0.015, M = m + m_{\text{bike}} \approx 1.2 \cdot m) \quad (8)$$

$$F_{\text{slope}} = Mg \cdot \sin \theta \quad (9)$$

$$F_{\text{accel}} = a \cdot M \quad (10)$$

$$F_{\text{wind}} = \frac{1}{2} C_W A \cdot \rho v_{\text{wind}}^2 \quad (11)$$

where  $\rho$  is the air density. Based on the temperature and humidity values in Assumption 1, we get  $\rho = 1.29 \text{ kg/m}^3$ .  $C_W$  is the wind resistance coefficient.  $A$  is the frontal area, which satisfies  $C_W A = 0.39 \text{ m}^2$  and is only valid for the frontal incident flow. Under no wind conditions,  $v_{\text{wind}} = v_{\text{bike}}$ .

Combining the above equations, and then by  $m \cdot P_{\text{out}} = F_{\text{total}} \cdot v$ , we can obtain the conversion relationship between  $P_{\text{out}}$  and  $v$ , as shown in the right of Figure 5b.

### 5.3 The Racing Strategy of Self-designed course

We first design a course that includes basic road conditions such as straights, downhill slopes, and sharp turns to obtain the strategies to be adopted in different road conditions. This strategy is then used to solve complex course problems in two real races.


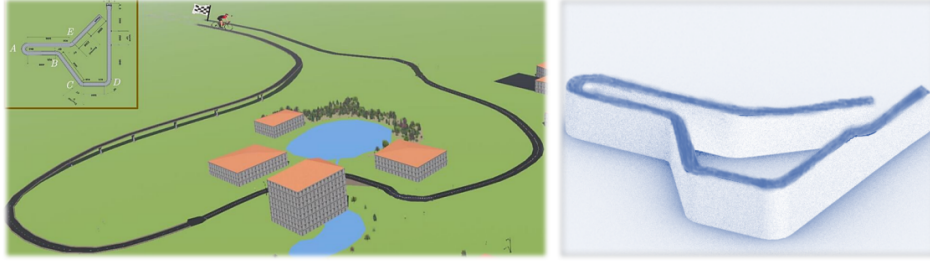


Figure 6: Left: Self-designed track scene construction. Right: Self-designed 3D map of the track

We use Webots software to build the track scene, and draw the plan and 3D map of the self-designed course, as shown in Figure 6. Section AB is a short uphill, section CD is a long uphill and section EF is a long downhill.

### 5.3.1 Analysis of Riding Strategies on Curved Roads

We set the inner diameter of the curve as  $r$ , the road width as  $d$ , and  $R$  as the radius of the optimal path arc. According to the centripetal force calculation formula  $F = \frac{mv^2}{r}$ , the maximum turning rate can be achieved by taking the route shown in the figure below. In this case, the physical quantities are related as follows:

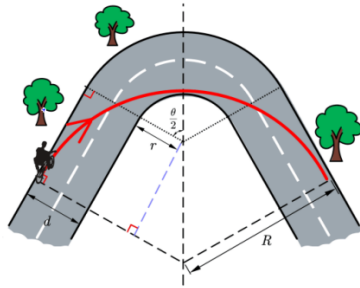

$$R - d - r = (R - r) \cos \frac{\theta}{2}$$

$$\left(1 - \cos \frac{\theta}{2}\right) R = d + r - r \cos \frac{\theta}{2}$$

$$F = M \frac{v^2}{R} \leq f_m = Mg \cdot \mu \cos \alpha$$

(where  $\alpha$  is the slope of the road)

Integrating, we get the maximum speed of cornering

$$v_{\max} = \sqrt{\frac{\mu g \cdot \cos \alpha \cdot [d + r - r \cos \frac{\theta}{2}]}{1 - \cos \frac{\theta}{2}}} \quad (12)$$

Since the total length of the curves of the self-designed track is 0.185km, it can be ignored compared with the total length of the straight track of 36.5km. Therefore, we first only consider the straight time when calculating the time and ignore the speed change problem in the turn. We approximated the rider's power output before and after the turn as a step change. After this is done, we complete the optimal passing scheme for each turn.

### 5.3.2 improvement of the Strategies on Curved Roads

In a cycling time trial, corners often pose a decisive constraint. Unlike on straight sections, riders in corners must not only provide the driving force (or braking force) in the direction of travel but also generate sufficient lateral force to maintain the turning motion. Due to the physical limit of the friction between the tire and the road surface, the force distribution of the rider in the corner

directly restricts their feasible speed and acceleration strategy. Traditional pacing models typically assume that riders pass through corners at a constant maximum safe speed, simplifying the corner into a pure speed constraint. However, this approach overlooks a crucial fact: within the limits of friction, riders can achieve acceleration or deceleration in corners by rationally distributing driving force, thereby obtaining a more optimal overall pacing strategy. Let the total mass of the bicycle and rider be  $m$ , the acceleration due to gravity be  $g$ , and the coefficient of friction between the tire and the road be  $\mu$ . Then, the maximum frictional force that the tire can provide is  $f_{\max} = \mu mg$ . During the process of driving through a curve, the frictional force of the tires can be decomposed into two mutually orthogonal components:

- Tangential friction force  $F_x$  along the direction of travel, used for driving or braking;
- Lateral friction force  $F_c$  perpendicular to the direction of travel, used to provide centripetal force.

According to the Friction Circle constraint, the resultant force of the total frictional force must not exceed the friction limit, thus there is

$$\sqrt{F_x^2 + F_c^2} \leq \mu mg. \quad (13)$$

The radius of curvature of the bend be  $R$ . The centripetal acceleration required for a rider traveling at a speed of  $v$  is  $a_c = \frac{v^2}{R}$ . The corresponding centripetal force is given by  $F_c = m \frac{v^2}{R}$ . Substituting this relationship Equation 13, we obtain the upper bound of the velocity under the given tangential force  $F_x$  condition

$$v_{\max} = \sqrt[4]{(\mu g R)^2 - \left(\frac{F_x \cdot R}{m}\right)^2}. \quad (14)$$

This constraint indicates that the greater the braking force applied by the rider in a turn, the smaller the friction margin available to provide centripetal force, thereby limiting the maximum feasible speed. To obtain the shortest time to pass through this curve, we will discretize the track along the arc length into  $N$  small sections, each of length  $ds$ , and the radius of curvature corresponding to the  $i$ th section is  $R_i$ . Let the speed and tangential force of the  $i$ th section be defined as  $v_i$  and  $F_{i,x}$  respectively, then each discrete section must satisfy

$$v_i \leq \sqrt[4]{(\mu g R_i)^2 - \left(\frac{F_{i,x} \cdot R_i}{m}\right)^2}. \quad (15)$$

The speed variation between adjacent sections is determined by the tangential acceleration  $a_x$ , and it satisfies the one-dimensional kinematic relationship.  $v_{i+1}^2 - v_i^2 = 2 \cdot a_x \cdot ds$ . However,  $a_x$  is not a freely variable value. On the one hand, the total tire friction force must be within the friction circle. On the other hand, considering the rider's maximum output power limit  $P_{\text{out}} \leq P_{\max}$ . Finally, aiming to minimize the total time taken, the objective function is obtained as follows:

$$T = \sum_{i=1}^N \frac{ds}{v_i}. \quad (16)$$

### 5.3.3 Analysis of Straight Riding Strategy

Next, we analyze the straight riding strategy. We assume that there are  $n_i$  sections of horizontal straights (lengths  $L_1, L_2, \dots, L_{n_i}$ ),  $n_j$  sections of downhill straights (lengths  $D_1, D_2, \dots, D_{n_j}$ ) and  $n_k$  sections of uphill straights (lengths  $U_1, U_2, \dots, U_{n_k}$ ). The conversion function  $v - P_{out}$  of the horizontal straight is  $v^{(straight)}(P)$ , the function for a downhill straight with an inclination angle  $\theta_j$  is  $v_{\theta_j}^{(downhill)}(P)$ , and  $v_{\theta_k}^{(uphill)}(P)$  is the function for an uphill straight with an inclination angle  $\theta_k$ . The task then turns into the following planning problem:

$$t = \sum_{i=1}^{n_i} \frac{L_i}{v^{(straight)}(P_i)} + \sum_{j=1}^{n_j} \frac{D_j}{v_{\theta_j}^{(downhill)}(P_j)} + \sum_{k=1}^{n_k} \frac{U_k}{v_{\theta_k}^{(uphill)}(P_k)}$$

$$\text{find } P_{out}(t),$$

$$\min\{t\} \quad \text{s.t.} \quad \int_0^{t_n} \frac{dt^*}{T(P_{out}(t^*))} = 0.95$$
(17)

In this map,  $n_i = 7, n_j = 1, n_k = 1$ . The subscript of  $L, D, U$  is marked in an increasing manner from the start point to the end point.

As for this function, we discretize  $P_{out}(t)$ . This makes the numerical calculation of  $\int_0^{t_n} \frac{dt^*}{T(P_{out}(t^*))}$  easier to implement. And we can use  $P_i, P_j, P_k$  to draw the  $P_{out}(x)$  graph, which is more helpful for cyclists to judge the output power according to the track landscape.

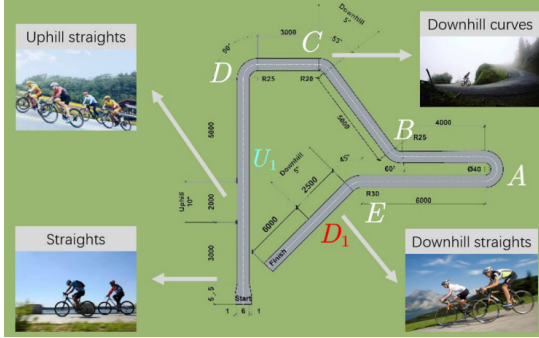


Figure 7: Ramp division

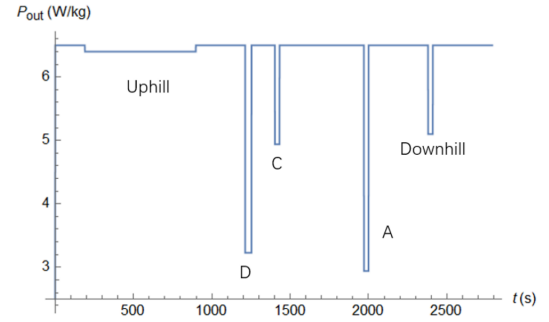


Figure 8: Time trial male rider strategy

We use Mathematica to numerically solve the inverse function and the nonlinear programming function Minimize. Then get the results shown in the table below:

Table 5: The results of the self-designed time trial course

| Rider type            | Gender | $P_{out}(L)$ | $P_{out}(U_1)$ | $P_{out}(D_1)$ | $t$      |
|-----------------------|--------|--------------|----------------|----------------|----------|
| Sprinter              | M      | 6.0          | 6.3            | 5.2            | 47.53min |
|                       | F      | 5.8          | 6.0            | 5.1            | 48.58min |
| Time Trial Specialist | M      | 6.5          | 6.4            | 5.1            | 46.48min |
|                       | F      | 6.0          | 5.9            | 5.0            | 48.20min |

We next solve for the turn time. We use the Equation 12 and the conversion function to solve, and get the following results:



Table 6: The results of each turn

| Curve number  | A    | B     | C    | D    | E     |
|---------------|------|-------|------|------|-------|
| $P_{out}$ (w) | 2.94 | 7.27  | 4.94 | 3.23 | 12.13 |
| $v$ (m/s)     | 7.34 | 11.02 | 9.48 | 7.98 | 13.38 |

Comparing the above two tables, it can be seen that the cyclist must slow down to pass the turn due to the large angle of turns A and D. Although the turn at C is 53 degrees, it is on a slope, which reduces the upper limit of static friction. So deceleration is also required. Turn B is no need to slow down.

In bicycle competition, the acceleration can reach  $2m/s^2$  when accelerating and decelerating. The time for this process can be ignored.

Combining the results of the straights and corners above, the optimal  $P_{out}(t)$  during the rider's competition is shown in fig. 8 (taking a male time trial specialist as an example).

## 5.4 The Strategy of 2021 UCI World Championship time trial course

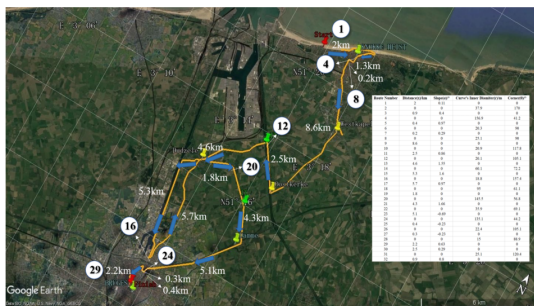


Figure 9: 2021 UCI Track Division



Figure 10: The finish near the city center plaza

According to the data on UCI's official website, we determined the terrain and route characteristics of the area of the course on Google Earth. And we divide the track into 32 parts by analyzing the similarities and differences of the road sections (as shown in Figure 9). Among them, 15 sections are curves, 2 sections are horizontal straights, 3 sections are downhill straights, and 12 sections are uphill straights.



Figure 11: Detail of section #25

It is worth noting that the competition area is located in northwestern Belgium. It is in the High Flanders Plain with small undulations. The maximum slope angle in the uphill section of this area is  $1.66^\circ$ , while in the downhill section is  $0.69^\circ$ . Besides, there are sufficiently long straights to transition between adjacent turns. The shortest straight is our section numbered 25 (shown in Figure 11). Section #25 is about 400m long, which is enough for cyclists to maintain the optimum for a long time. Therefore, the rider's passing time is hardly affected by turning, and the piecewise discrete programming model is still applicable. Different from the Olympic Time Trial course in Tokyo, this competition has relatively low requirements on players' driving skills and cornering skills and focuses on physical distribution and endurance.

#### 5.4.1 The Strategy of Straight and Ramp Riding in Belgium course

Based on the above analysis, we can still use the method of self-designed track. First, we solve the straight strategy, as follows:

$$\begin{aligned}
 t &= \sum_{i=1}^{n_i} \frac{L_i}{v^{(\text{straight})}(P_i)} + \sum_{j=1}^{n_j} \frac{D_j}{v_{\theta_j}^{(\text{downhill})}(P_j)} + \sum_{k=1}^{n_k} \frac{U_k}{v_{\theta_k}^{(\text{uphill})}(P_k)} \\
 &\quad \text{find } P_{out}(t), \\
 \min\{t\} \quad \text{s.t.} \quad &\int_0^{t_n} \frac{dt^*}{T(P_{out}(t^*))} = 0.95
 \end{aligned} \tag{18}$$

where  $n_i = 2$ ,  $n_j = 3$ ,  $n_k = 12$ .

Considering that there are many uphill sections and different slope angles. It makes the model difficult to converge, which is extremely unfavorable for the computer's nonlinear programming solution. Due to the small undulating terrain in this area, we selected 9 road sections with slope angles below  $1^\circ$  (#1, 3, 5, 7, 11, 17, 29, 30, 32) and group them together. Then we can weight the slope angle according to the road length to get the integrated new slope. We next use the new slope to solve.

Since  $\sin \theta$  is approximately linear in the range of small slope angles, when integrating multiple ramps, we can use approximately linear properties for weighting. The parameters are de-

terminated by the following equations:

$$U_c = \sum_{k \in \mathcal{A}_U} w_k U_k, \quad \theta_c = \sum_{k \in \mathcal{A}_U} w_k \theta_k, \quad (19)$$


$$w_k = \frac{U_k}{\sum_{q \in \mathcal{A}_U} U_q}. \quad (20)$$

After processing, the problem is transformed into the following nonlinear programming problem:


$$t = \sum_{i=1}^{n_i} \frac{L_i}{v^{(\text{straight})}(P_i)} + \sum_{j=1}^{n_j} \frac{D_j}{v_{\theta_j}^{(\text{downhill})}(P_j)} + \sum_{k=1}^{n_k} \frac{U_k}{v_{\theta_k}^{(\text{uphill})}(P_k)} + \frac{U_c}{v_{\theta_c}^{(\text{uphill})}(P_c)}$$

$$\text{find } P_{out}(t),$$


$$\min\{t\} \quad \text{s.t.} \quad \int_0^{t_n} \frac{dt^*}{T(P_{out}(t^*))} = 0.95 \quad (21)$$

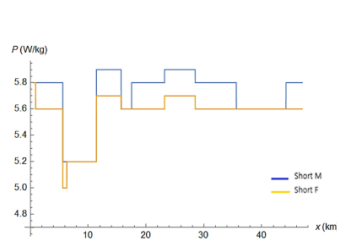

(a)  $P_{out}(x)$  plot for sprinters

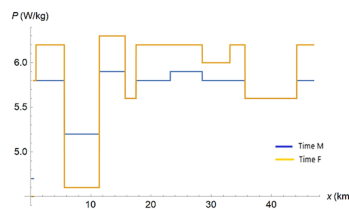

(b)  $P_{out}(x)$  plot for time trial specialist

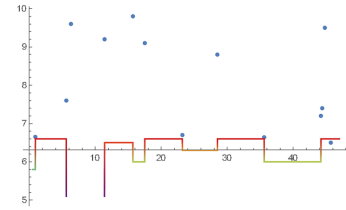

(c) Scatter plot of maximum rate in the turn

Figure 12: The results of 2021 UCI World Championship time trial course.

We use Mathematica to solve the optimal output power of each section of the road. The athlete curves are shown in the left and middle of Figure 12. The four types of riders' complete time are shown in the following table:

Table 7: The results of 2021 UCI World Championship time trial course

| Male sprinter | Female sprinter | Male time trial specialist | Female time trial specialist |
|---------------|-----------------|----------------------------|------------------------------|
| 58.15 min     | 59.62 min       | 53.03 min                  | 54.05 min                    |

#### 5.4.2 The Strategy of Turning in Belgium course

After that, we use Equation 12 and  $P_{out}(v)$  to solve for the maximum power in the turn. The results are shown in the right of Figure 12. The scatter in the figure is the maximum turning power of the curve corresponding to  $\alpha$ , while the broken line is the  $P_{out}(t)$  of the male time-trial specialist. It can be seen from the figure that the power of the cyclists on the straights is less than the maximum turning power, except for the #23 and #32 curves that require a slight deceleration.

In the above calculations, we approximated  $P_{out}(x)$  as a discrete function. We will further analyze the actual output of the players in section 5.5.1, as shown in Figure 13. This would justify our approach in this matter.

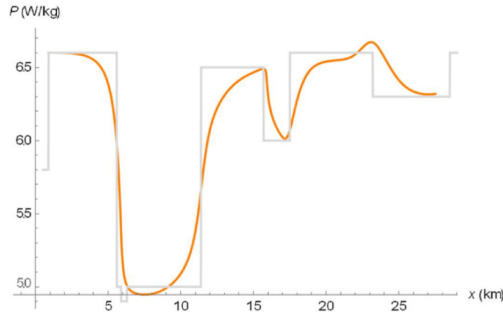


Figure 13: Actual output power

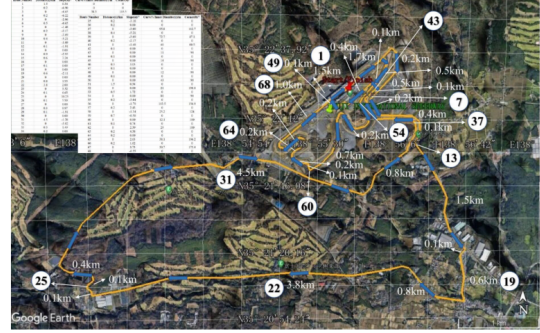


Figure 14: 2021 Olympic track division

## 5.5 The Strategy of 2021 Olympic Time Trial course

As can be seen from Figure 14, the Tokyo Circuit is located near the city of Toyama, which is surrounded by the treacherous Northern Alps Tateyama Mountains on three sides. The terrain here changes greatly and the turns are sharp, which is significantly different from the Belgian track. This event had high requirements on the slope skills of the cyclists. Besides, male cyclists need to circle the track twice while female cyclists only need once. We divided the Tokyo circuit into 68 segments and 2 zones (large circle and small circle) based on the terrain and ramp characteristics of the area. The division situation is shown in Figure 14. Among them, most road sections in the large circle and some sections in the small circle can still be calculated by the previous model. For the other two road sections (the #24-27 big climbing curve in Figure 14 and the #55-56 sharp curve in Figure 14), we will analyze them separately later.

### 5.5.1 The Strategy for Regular Road Sections in Japan

Based on our segmentation of the track, in the remaining 62 regular road segments,  $n_i = 20$ ,  $n_j = 25$ ,  $n_k = 17$ . Because  $1 - \cos 2^\circ < 7 \times 10^{-4}$  and  $\cos 2^\circ - \cos 4^\circ < 2 \times 10^{-3}$ , we apply the weighted-simplification method in subsubsection 5.5.1 to the slopes whose angle satisfies  $\theta < 2^\circ$  and  $2^\circ < \theta < 4^\circ$  respectively. The set of road-segment numbers that meet the conditions is  $T_{U2}$ ,  $T_{D2}$ ,  $T_{U4}$ ,  $T_{D4}$ , with cardinalities  $|T_{U2}| = 8$ ,  $|T_{D2}| = 9$ ,  $|T_{U4}| = 9$ ,  $|T_{D4}| = 11$ . Ultimately, the problem transforms into the following nonlinear-programming problem:

$$t = \sum_{i=1}^{n_i} \frac{L_i}{v_{(\text{straight})}(P_i)} + \sum_{j \notin I_D} \frac{D_j}{v_{\theta_j}^{(\text{downhill})}(P_j)} + \sum_{k \notin I_U} \frac{U_k}{v_{\theta_k}^{(\text{uphill})}(P_k)} + \sum_{r_U, r_D} \frac{U_{T_i}}{v_{\theta_{T_i}}^{(\text{up/down})}(P_{T_i})}$$

$$\text{as } t = \Sigma_i + \Sigma_j + \Sigma_k + \Sigma_T$$

$$\text{find } P_{out}(t),$$

$$\min\{t\} \quad \text{s.t.} \quad \int_0^t \frac{dt^*}{T(P_{out}(t^*))} = 0.95.$$

where  $\Sigma_T$  represents the integrated-item term.

With the help of *Mathematica*, we obtain the curve of  $P_{out}(x)$ , and the result is shown in



Figure 15. Compared with 2021 UCI, the Tokyo circuit is more complicated; the difficulty of the riders' power-distribution strategy has also increased significantly.

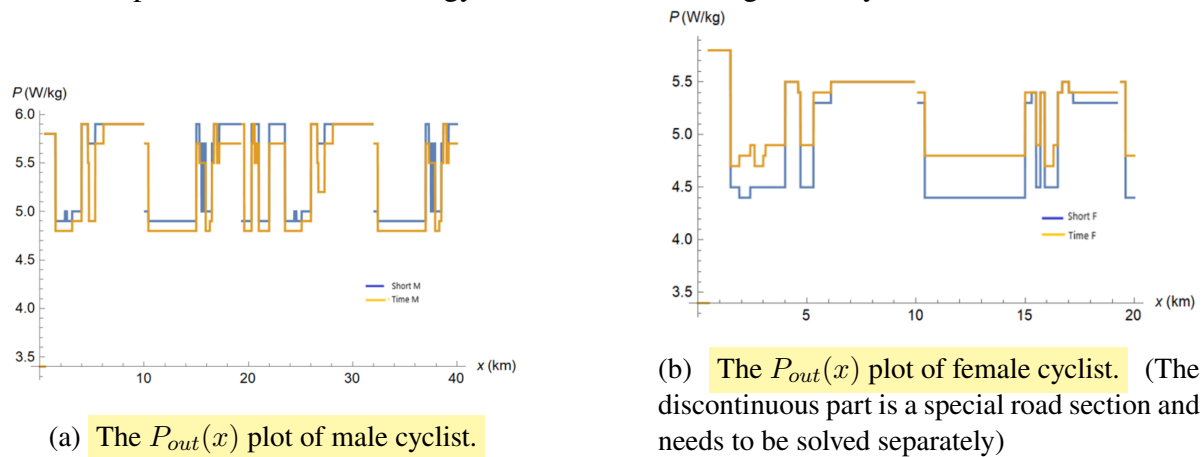


Figure 15: The result of 2021 Olympic Time Trial course



Figure 16: Detail of section #24-27

### 5.5.2 The Strategy for Special Road Sections in Japan

#### (1) Huge hill turn of section #24-27

The parameters of these four sections are shown in the table below:

Table 8: The data of section #24-27

| Section | Length         | Turning radius | Slope angle   | Turning angle |
|---------|----------------|----------------|---------------|---------------|
| #24     | 0.1km          | 0m             | $6.65^\circ$  | $0^\circ$     |
| #25     | $\approx 0$ km | 9m             | $10.25^\circ$ | $147^\circ$   |
| #26     | 0.1km          | 0m             | $5.99^\circ$  | $0^\circ$     |
| #27     | $\approx 0$ km | 8.5m           | $4.22^\circ$  | $79^\circ$    |

The straight part here is steep, such as section #63 with a slope angle of  $4.4^\circ$ . The cyclist speed here is 6.83m/s and the output power is 5.5W/kg. We will base our straights strategy around this data.

Next, we analyze the turning strategy. The curve is a sharp turn with continuous climbing. We use Equation 12 to calculate. The best turning speed of section #25 is  $6.0 m/s$ , with  $P^{(\#25)} = 6.32 W/kg$ . And the speed of section #27 is  $6.4 m/s$ ,  $P_{\max}^{(\#27)} = 5.31 W/kg$ . In this way, the time used for this section is 31.2s.

## (2)Sharp turn of section#55-56

The parameters of these four sections are shown in the table below:

Table 9: The data of section #55-56

| Section | Length       | Turning radius | Slope angle       | Turning angle |
|---------|--------------|----------------|-------------------|---------------|
| #55km   | 0.2m         | $0^\circ$      | $\approx 0^\circ$ | $0^\circ$     |
| #56km   | $\approx 0m$ | $12^\circ$     | $\approx 0^\circ$ | $166.9^\circ$ |

As for this turn, it has a small inner diameter and a high turning angle of  $166.9^\circ$ . By calculation,  $v_{\max}^{(\#56)} = 5.806 m/s$ ,  $P_{\max}^{(\#56)} = 4.32 W/kg$ . On the straight #55,  $P_{out} = 5.6 W/kg$ ,  $v = 10.0 m/s$ . We plan to start decelerating 20m before the start of section #56. And accelerate back to the original speed immediately after passing the turn #56. It take 21.7s.



Figure 17: Detail of section #55-56

Combining 5.5.1 and 5.5.2, the results of the four players under the optimization strategy are shown in the following table:

Table 10: The results of 2021 Olympic Time Trial course

| Rider type    | Male sprinter | Female sprinter | Male time trial specialist | Female time trial specialist |
|---------------|---------------|-----------------|----------------------------|------------------------------|
| Complete time | 62.68min      | 56.03min        | 40.97min                   | 33.63min                     |

It can be seen that the nontrivial road condition increases the test of the cyclist's climbing ability and endurance. The sprinter's performance was significantly lower than that of the time trial specialist. This disparity is larger than that of UCI.

### 5.5.3 The Improved Strategies

To verify the rationality and superiority of our curve speed optimization model, we tested it on curves from Japan's 56th section, whose parameters are listed in Table 9. Using the improved

dynamic and kinematic curve models, we solved the optimization problem with MATLAB's fmincon optimizer. Results are presented in Figure 18.

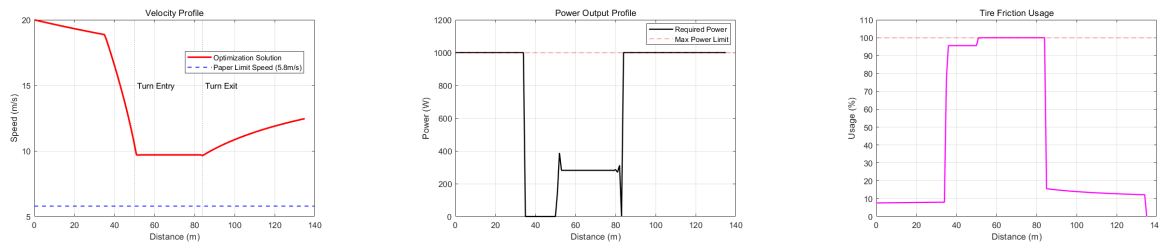


Figure 18: Comparison of Effects

The results show that the traditional model adopts a uniform speed passing strategy at the maximum safe speed in the curve, and its curve speed is solely constrained by the centripetal force, with the calculated limit speed being approximately 5.8 m/s. In contrast, the model established in this paper allows for a reasonable distribution of the tangential force and centripetal force under the premise of satisfying the friction circle constraint, thereby achieving non-uniform motion within the curve. The limit speed of the optimized model at the curve can be increased to 9.64 m/s.

The power output curve further reveals the essential differences in the cornering strategies of the two models. In the traditional model, the rider maintains a constant speed within the corner, corresponding to a tangential force close to zero, and the power output drops significantly, making the cornering phase a "pure loss period". In contrast, in the optimized model, the rider actively decelerates and reduces power output before entering the corner, maintaining a moderate power level within the core cornering area while strictly adhering to the maximum power constraint.  $P_{out} \leq P_{max}$ . Control. After exiting the corner, it quickly returns to the maximum power acceleration state. This strategy achieves a redistribution of power before and after, avoiding "power waste" in the corner and shortening the lap time overall.

The tire friction utilization curve indicates that the optimization model fully utilized the friction circle constraint within the core section of the curve, with the friction utilization rate once approaching 100%, suggesting that the model was operating near the physical limit at this stage. However, in the straight sections and the exit of the curve, the friction utilization rate significantly decreased, indicating that the constraints at this time were mainly dominated by power rather than tire grip.

In summary, by improving the dynamic model of the curve, we achieved a reasonable distribution of tangential force and centripetal force in the curve, thereby obtaining a better overall power distribution plan. Compared with the traditional model's curve time of 21.7 seconds, the optimized curve time only requires 6.78 seconds, an improvement of 68.7%. This shows that allowing acceleration and deceleration decisions within the curve under the premise of maintaining physical feasibility can significantly improve the efficiency of passing through the stage, verifying the significant advantage of the improved model in the problem of pace optimization.

## 6 Sensitivity Analysis

### 6.1 Sensitive Analysis of Weather

Weather conditions include temperature, humidity, wind speed, wind direction, etc. According to the theory of blood CK and HB [5], within a certain range, temperature and humidity have little effect on the physical fitness of athletes. From Assumption 1, the conclusion can be further proved reasonable.

Secondly, rain has little effect on the rolling friction coefficient of the asphalt track. Rain only increases the demands on the driver's turning skills. The literature [11] indicates that the negative impact of rain can be eliminated to a certain extent through training. In conclusion, our analysis of the sensitivity to weather factors will focus on wind speed and direction. We divide the sensitivity analysis into two parts: straight sections and turning sections to determine the potential impact of wind directions and wind. The influence of the road gradient is mainly reflected in the friction of the bicycle. Therefore, we uniformly assume that the road slope is 0% in the sensitivity analysis.

#### (1) Straight sections

On the straights, only the effective wind speed will affect the ride. The effective wind speed is in the same direction as the cyclist. Therefore, we only analyze the sensitivity of the model to the wind speed in this part. According to the wind speed requirements of cycling events, as well as the average wind speed of Japan and Belgium in July, we selected the wind speed to be around 2m/s for analysis. We use Python to draw the maximum output power curve and the wind resistance influence power curve within the range of  $\pm 1\%$  deviation of wind speed. The results are shown in Figure 19.

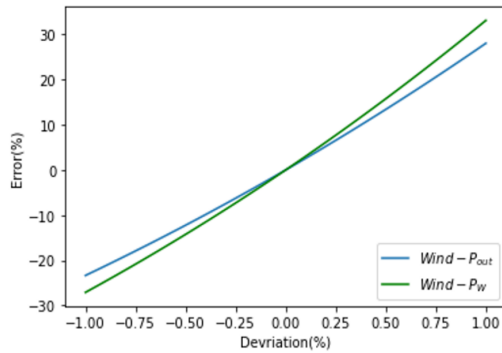


Figure 19: Sensitivity of wind speed

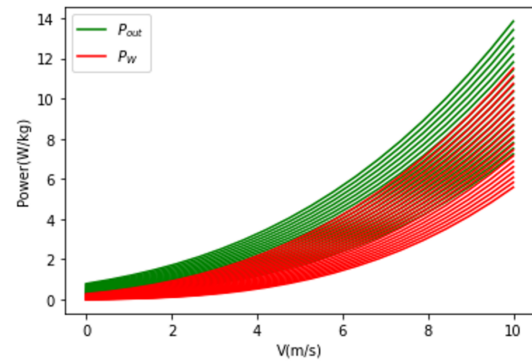


Figure 20: Change of  $P_{out}(v)$  and  $P_w(v)$

Figure 20 shows the changes of and curves (moving from bottom to top) when the wind speed changes from  $1m/s$  to  $4m/s$ . From the figure, when the cyclist rides at a constant speed on the straight, the deviation is 10%. Therefore, the model is more sensitive to wind speed in straight sections.

#### (2) Turning sections

Next, we analyze the model's sensitivity to wind speed and direction during turning. We use *Python* to perturb the model within 10% of the deviation from the wind speed and direction. The results are shown in Figure 21. where  $\gamma$  is the local wind angle.

During the turning sections, the effect of wind direction change on the rider's maximum



output power is on the order of 0.1%, while the effect of wind speed changes is on the order of 0.01%. Both effects are much smaller than the straight sections. Therefore, the model is less sensitive to wind speed and direction in the turning sections.

In conclusion, the change of wind direction and speed within a certain range will not affect the turning strategy of the model. On the other hand, the model is more sensitive to headwind. In individual races, the output power when the wind is down can be appropriately reduced, while the wind is up it can be increased.

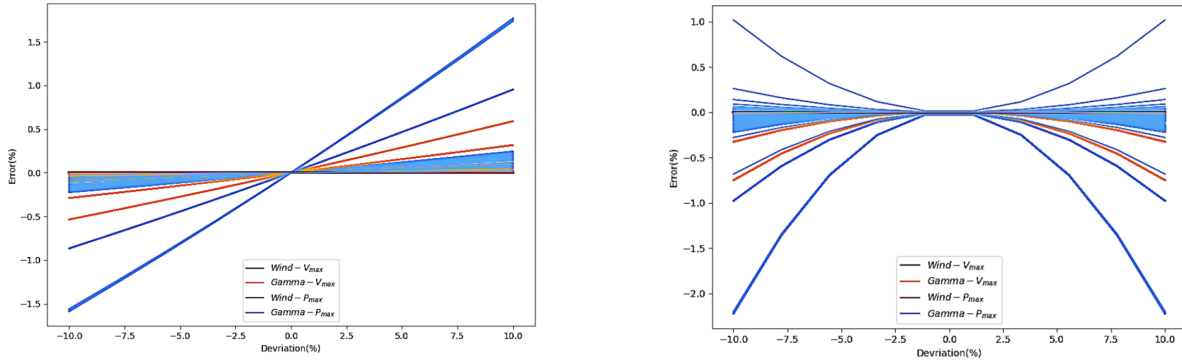


Figure 21: Sensitivity of wind speed&direction. Left: The course in Japan, with  $v_{wind} = 2$  m/s,  $\gamma = -45^\circ$ . Right: The course in Belgium, with  $v_{wind} = 2$  m/s,  $\gamma = 180^\circ$ .

In addition, this phenomenon provides ideas for the strategy of team time trial, which we will focus on in section 7.

## 6.2 Slope Gradient Sensitivity Analysis

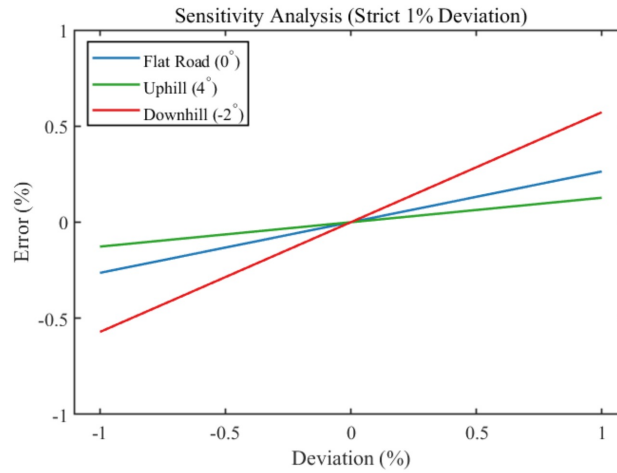


Figure 22: Slope Gradient Sensitivity Analysis

In actual cycling competitions, the design variations across different racecourses typically lead to significant fluctuations in gradient. Changes in slope affect the magnitude of the gravitational component along the inclined surface, thereby altering the power output required from the cyclist and ultimately influencing race performance. Therefore, conducting a sensitivity analysis on how gradient variations impact model outcomes is of considerable importance. We selected three typical track slope conditions for analysis: a flat segment ( $0^\circ$ ), an uphill segment ( $4^\circ$ ), and

a downhill segment ( $-2^\circ$ ). Using MATLAB, parameter perturbations within a range of  $\pm 1\%$  were applied, yielding the results illustrated in Figure 22.

The analysis results show that the model's anti-interference ability against slope disturbances varies under different road conditions: It performs best on horizontal roads, with the error controlled within  $0.2\%$ ; secondly, on uphill roads; and relatively weak on downhill roads. However, overall, the errors in all three road conditions are controlled within  $1\%$ , and the model's performance is relatively stable. This indicates that the model is insensitive to certain ranges of slope changes, has good robustness, and will not significantly affect the accuracy of the final result, thereby not affecting the power distribution during the entire competition period.

### 6.3 Sensitive Analysis of Rider Deviations

In the  $P_{out}(x)$  solution process of subsection 5.5.1–subsection 5.5.2, we adopt an idealized approximate discrete value model, so the power output of the rider on each small segment remains constant. In practical situations, due to the randomness of the rider's operation, it is difficult to strictly follow the optimal power curve. In this part we will test the sensitivity of the rider deviations from the target power to the model.

In the model, the rider's power output is calculated based on the gradient of the road.

## 7 Further Discussion of The Team Time Trial

First, take the time trial in the 2021 UCI as an example. We perform spline interpolation on each segment of the discrete  $P_{out}(x)$  based on its endpoint values. They are then used as a function  $P_{out}$  of the actual output of the rider. Then, we add random disturbance term  $\widetilde{P}_{out} = \sum_{i=1}^4 A_i \sin(0.1i \cdot t)$ , where  $A_i$  is determined by a random number and  $0 < A_i < 5\% \cdot P_{out}^{(max)}$ . Then the actual power output function of the rider is  $P_{out}^{(real)} = \widetilde{P}_{out} + \overline{P}_{out}$ . We conduct three experiments and get three  $P_{out}^{(real)}(x)$  curves. Plot them in the same coordinate system as the ideal  $P_{out}(x)$  curve, as shown in the left of Figure 23.

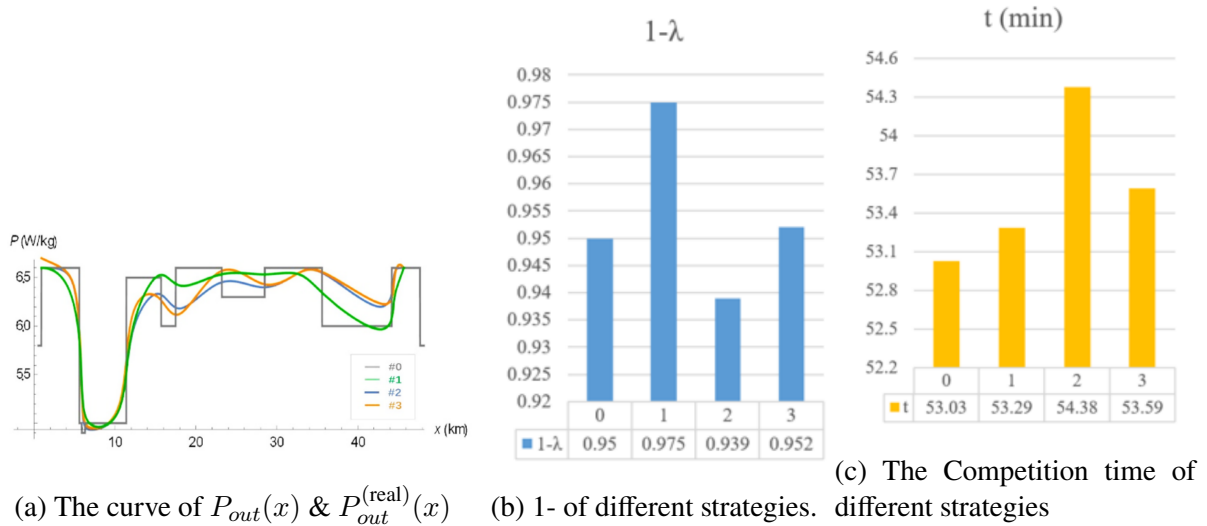


Figure 23: The results of the model.

We put the four curves into the energy constraints, and it turned out that all riders could finish the race. In terms of whether it can finish the race, the stability of the model is excellent.

The specific

results are shown in the middle of Figure 23. Next, we calculated the time it took for the rider to reach the finish line (see the right of Figure 23). Rider results are all below the ideal output curve. But the lag time is within 2.5% of the optimal time. Therefore, the sensitivity of the race performance to the actual strategy of the rider is low. We recommend that riders maintain an ideal power curve at the end of each segment, which helps reduce lag time.

Finally, we compared the calculation results of our model with the results of the actual competition winners. The results are as follows:

Table 11: The comparison between Championship results and our model's results

| Rider type               | Male cycling time trial | Female cycling time trial |
|--------------------------|-------------------------|---------------------------|
| The results of our model | 56.03 min               | 34.63 min                 |
| Championship results     | 55.08 min               | 30.22 min                 |

The model's results are slightly behind the world championship results. This may be related to the fact that the experimental data samples we use to determine the power curve are from average riders rather than top riders.

Compared with the championship, the results of our model solution are reasonable. It also shows that our model has the effect of bringing average-qualified riders close to the performance of champion riders, which illustrates the effectiveness of the model.

## 8 Further Discussion of The Team Time Trial

In the 6.1, we concluded that the crosswind have little effect on the rider, while the headwind have a big effect. We found that this feature can be applied to the optimization of team time trials. By reviewing the literature, we came to the following conclusions:

Due to the existence of drafting yields, within a certain distance ( $< 1$  m), the wind resistance of the second rider on the pace line is reduced to 60–70% of the individual rider. While the drag for the third rider dropped to about 50–63%. The drag along the convoy will gradually decrease to about 47–60%.

In addition, due to the existence of “subsonic upstream disturbance”. With multiple riders, it's not necessarily that the last rider has the least wind resistance. In fact, the last rider is the only rider on the pace line who didn't benefit from the subsonic upstream disturbance.

We will mainly analyze the formation strategy of the cycling team to deal with the headwind on the straight. We calculated the team and individual results on the 1 km straight to verify the rationality and effectiveness of the strategy.

For the 6-person cycling team, we have two formations, the snake and the pyramid. For the 4-person sprint cycling team, we designed the shield formation as shown in the left of Figure 24. The numbers in the heat map represent the ratio of the wind resistance of the individual in the team competition to that in the same state of the individual competition  $K_f$ .

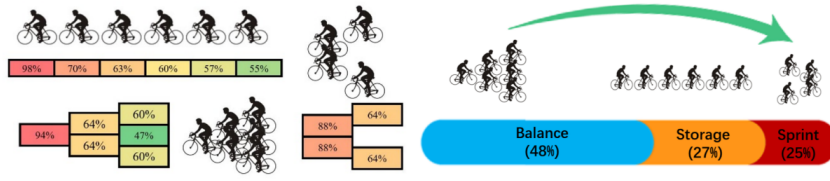


Figure 24: Left: Schematic diagram of three formations in team time trial. Right: Team strategy in the time trial.

We divide the race into three stages to calculate the team race results on the 20 km straight: Balance, Storage, and Sprint. The lengths are  $L_B$ ,  $L_S$ ,  $L_R$  and  $L_B + L_S + L_R = 20$  km.

- **Balance:** 6 riders take turns riding in 6 positions. In this way, the physical energy consumption caused by wind resistance is balanced. We choose the formation with the lowest average resistance coefficient  $\overline{K_f}$  as the optimal one. It is calculated that the snake formation  $\overline{K_f} = 67.17$  and the pyramid formation  $\overline{K_f} = 64.83$ , so we choose the pyramid formation.
- **Storage:** Since changing the formation will cause the rider to consume excess physical strength; the formation should be maintained as much as possible. Besides, the four riders who cross the line should rotate in the position with the smaller drag coefficient, while the other two riders (called windbreakers) should rotate in the place with the larger drag coefficient. Considering the balance of the sprinters in the long snake formation, we choose the long snake formation after weighing.
- **Sprint:** According to the simulation results of literature [2], we choose the shield formation with the smallest drag coefficient.

Next, take the data of male time trial specialists as an example to calculate. The result is that the Balance section accounts for 48%, the Storage section accounts for 27%, and the sprint section accounts for 25%, as shown in Figure 25. The 20 km straight individual race was 24.8 min, and the team race was 21.2 min. The team competition results are significantly better than the individual competition. Compared with the average speed of the Tour de France 2018 Stage3 champion BMC team of 56.1 km/h, the average rate of our model on the straights is 56.6 km/h, proving the model's accuracy.

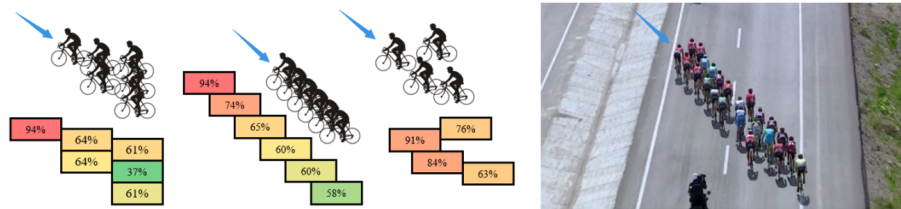


Figure 25: Left: Cycling strategy for lateral wind. Right: Slanted line array in Tour of Turkey 2016.

In addition, for the case of crosswind, we take the wind coming from the right front as an example. The formation should be adjusted to the diagonal array, as shown in Figure 25. It is beneficial to reduce drag coefficient and reduce crosswind disturbance.

## 9 Model Evaluation and Further Discussion

### 9.1 Strengths

- **Efficient solutions** We exploit the linearity or near-linearity of the function when solving the optimal policy. The solution speed and convergence speed are greatly improved when performing integration and discrete approximations.
- **Accuracy of results** We relied on data and literature for model simplification. And we have analyzed the special part of the track separately, which guarantees the accuracy. In addition, the solution results of the model are close to the championship results, which verifies the accuracy of the results.
- **Universality** The piecewise nonlinear programming model we adopted is suitable for races where track information and player information are known. In addition to cycling time trials, swimming, running and other competitions can also be applied by modifying the parameters.
- **Stability and high fault tolerance** Our model was tested for sensitivity and its stability was verified. We chose the parameters of the average rider and set the energy utilization to 95%. These steps also improve the fault tolerance of the model.

### 9.2 Weaknesses

- **Lack of adversary factor** Our model mainly analyzes unopposed time trials. The modeling process lacks consideration of offense and defense strategies among riders.
- **Difficulty in further improving accuracy** We used numerical methods and discrete methods in the model. These methods limit the accuracy of the model. So in Sections VI and VII, we discuss the model further to improve this problem. It turns out that the improved model is more accurate.

### 9.3 Conclusion

Our paper provides a detailed analysis of the relationship between riding strategy and power curve. Before introducing our model, we analyze the characteristics of various types of riders and different kinds of tracks. Then the three-stage power curve model and dynamic bicycle model are proposed.

Next, in order to use the established mathematical model to optimize the strategy of the bicycle time trial, we divide the complex track into several simple segments according to the track characteristics such as slope and turn. Then, using nonlinear programming to solve the optimal strategy, we analyzed the self-made track, the Belgian track, and the Tokyo track. Different types and genders of players have different strategies. For the Belgian track, the deviation of the model solution results from the world championship results is about 8%. The model results deviate by about 6% for the Tokyo circuit. After that, we analyzed the model's sensitivity

to weather factors and rider deviations. Among the weather factors, wind speed and direction dominate. We conclude that the model is more sensitive to headwind. This conclusion is beneficial to the formation analysis of the team time trial. We perturbed the model with random disturbance terms when studying the sensitivity to rider deviations, resulting in three power curves. The riders finish the race in this disturbance with little difference in their time, proving our model's robustness.

## References

- [1] Tom Bell. Could critical power be a better alternative to ftp for training?, July 2021. Published July 15, 2021.
- [2] Bert Blocken, Yasin Toparlar, Thijs {van Druenen}, and Thomas Andrianne. Aerodynamic drag in cycling team time trials. *Journal of Wind Engineering and Industrial Aerodynamics*, 182:128–145, November 2018.
- [3] Mark Burnley and Andrew M. Jones. Oxygen uptake kinetics as a determinant of sports performance. *European Journal of Sport Science*, 7(2):63–79, 2007.
- [4] Zhongwei Guan. Design and theoretical basis of lactic acid tolerance training for 400 m secondary athletes. *Journal of Shanghai Institute of Physical Education*, (S1):142–144, 2001.
- [5] Jianmin Ji and Dapeng Cai. Effects of temperature and humidity on the training effect of male canoeists. *Journal of Shenyang Institute of Physical Education*, 30(3):68–71, 2011.
- [6] T. Moritani, A. Nagata, H. A. deVries, and M. Muro. Critical power as a measure of physical work capacity and anaerobic threshold. *Ergonomics*, 24(5):339–350, May 1981.
- [7] R. HUGH MORTON. A 3-parameter critical power model. *Ergonomics*, 39(4):611–619, 1996. PMID: 8854981.
- [8] Rainer Pivit. Drag force formulas. *Radfahren*, (2):44–46, 1990.
- [9] Michael J Puchowicz, Jonathan Baker, and David C. Clarke. Development and field validation of an omni-domain power-duration model. *Journal of Sports Sciences*, 38:801 – 813, 2020.
- [10] Guiying Wang. A study on the main physical fitness indicators and evaluation standards of chinese men's 400-meter athletes. *Journal of Ezhou University*, 14(2):69–72, 2007.
- [11] Steve Westlake. Are you faster when it rains?, March 2016. Published March 1, 2016.
- [12] Peter G. Weyand, Jennifer E. Lin, and Matthew W. Bundle. Sprint performance-duration relationships are set by the fractional duration of external force application. *American Journal of Physiology-Regulatory, Integrative and Comparative Physiology*, 290(3):R758–R765, 2006. PMID: 16254125.