USB POWER & COMMUNICATION

VUSB MAX = 5V
HIGH = 2.31V – 3V3
V_IO = (150k/(100k + 150k)) x 5V = 3V (HIGH)

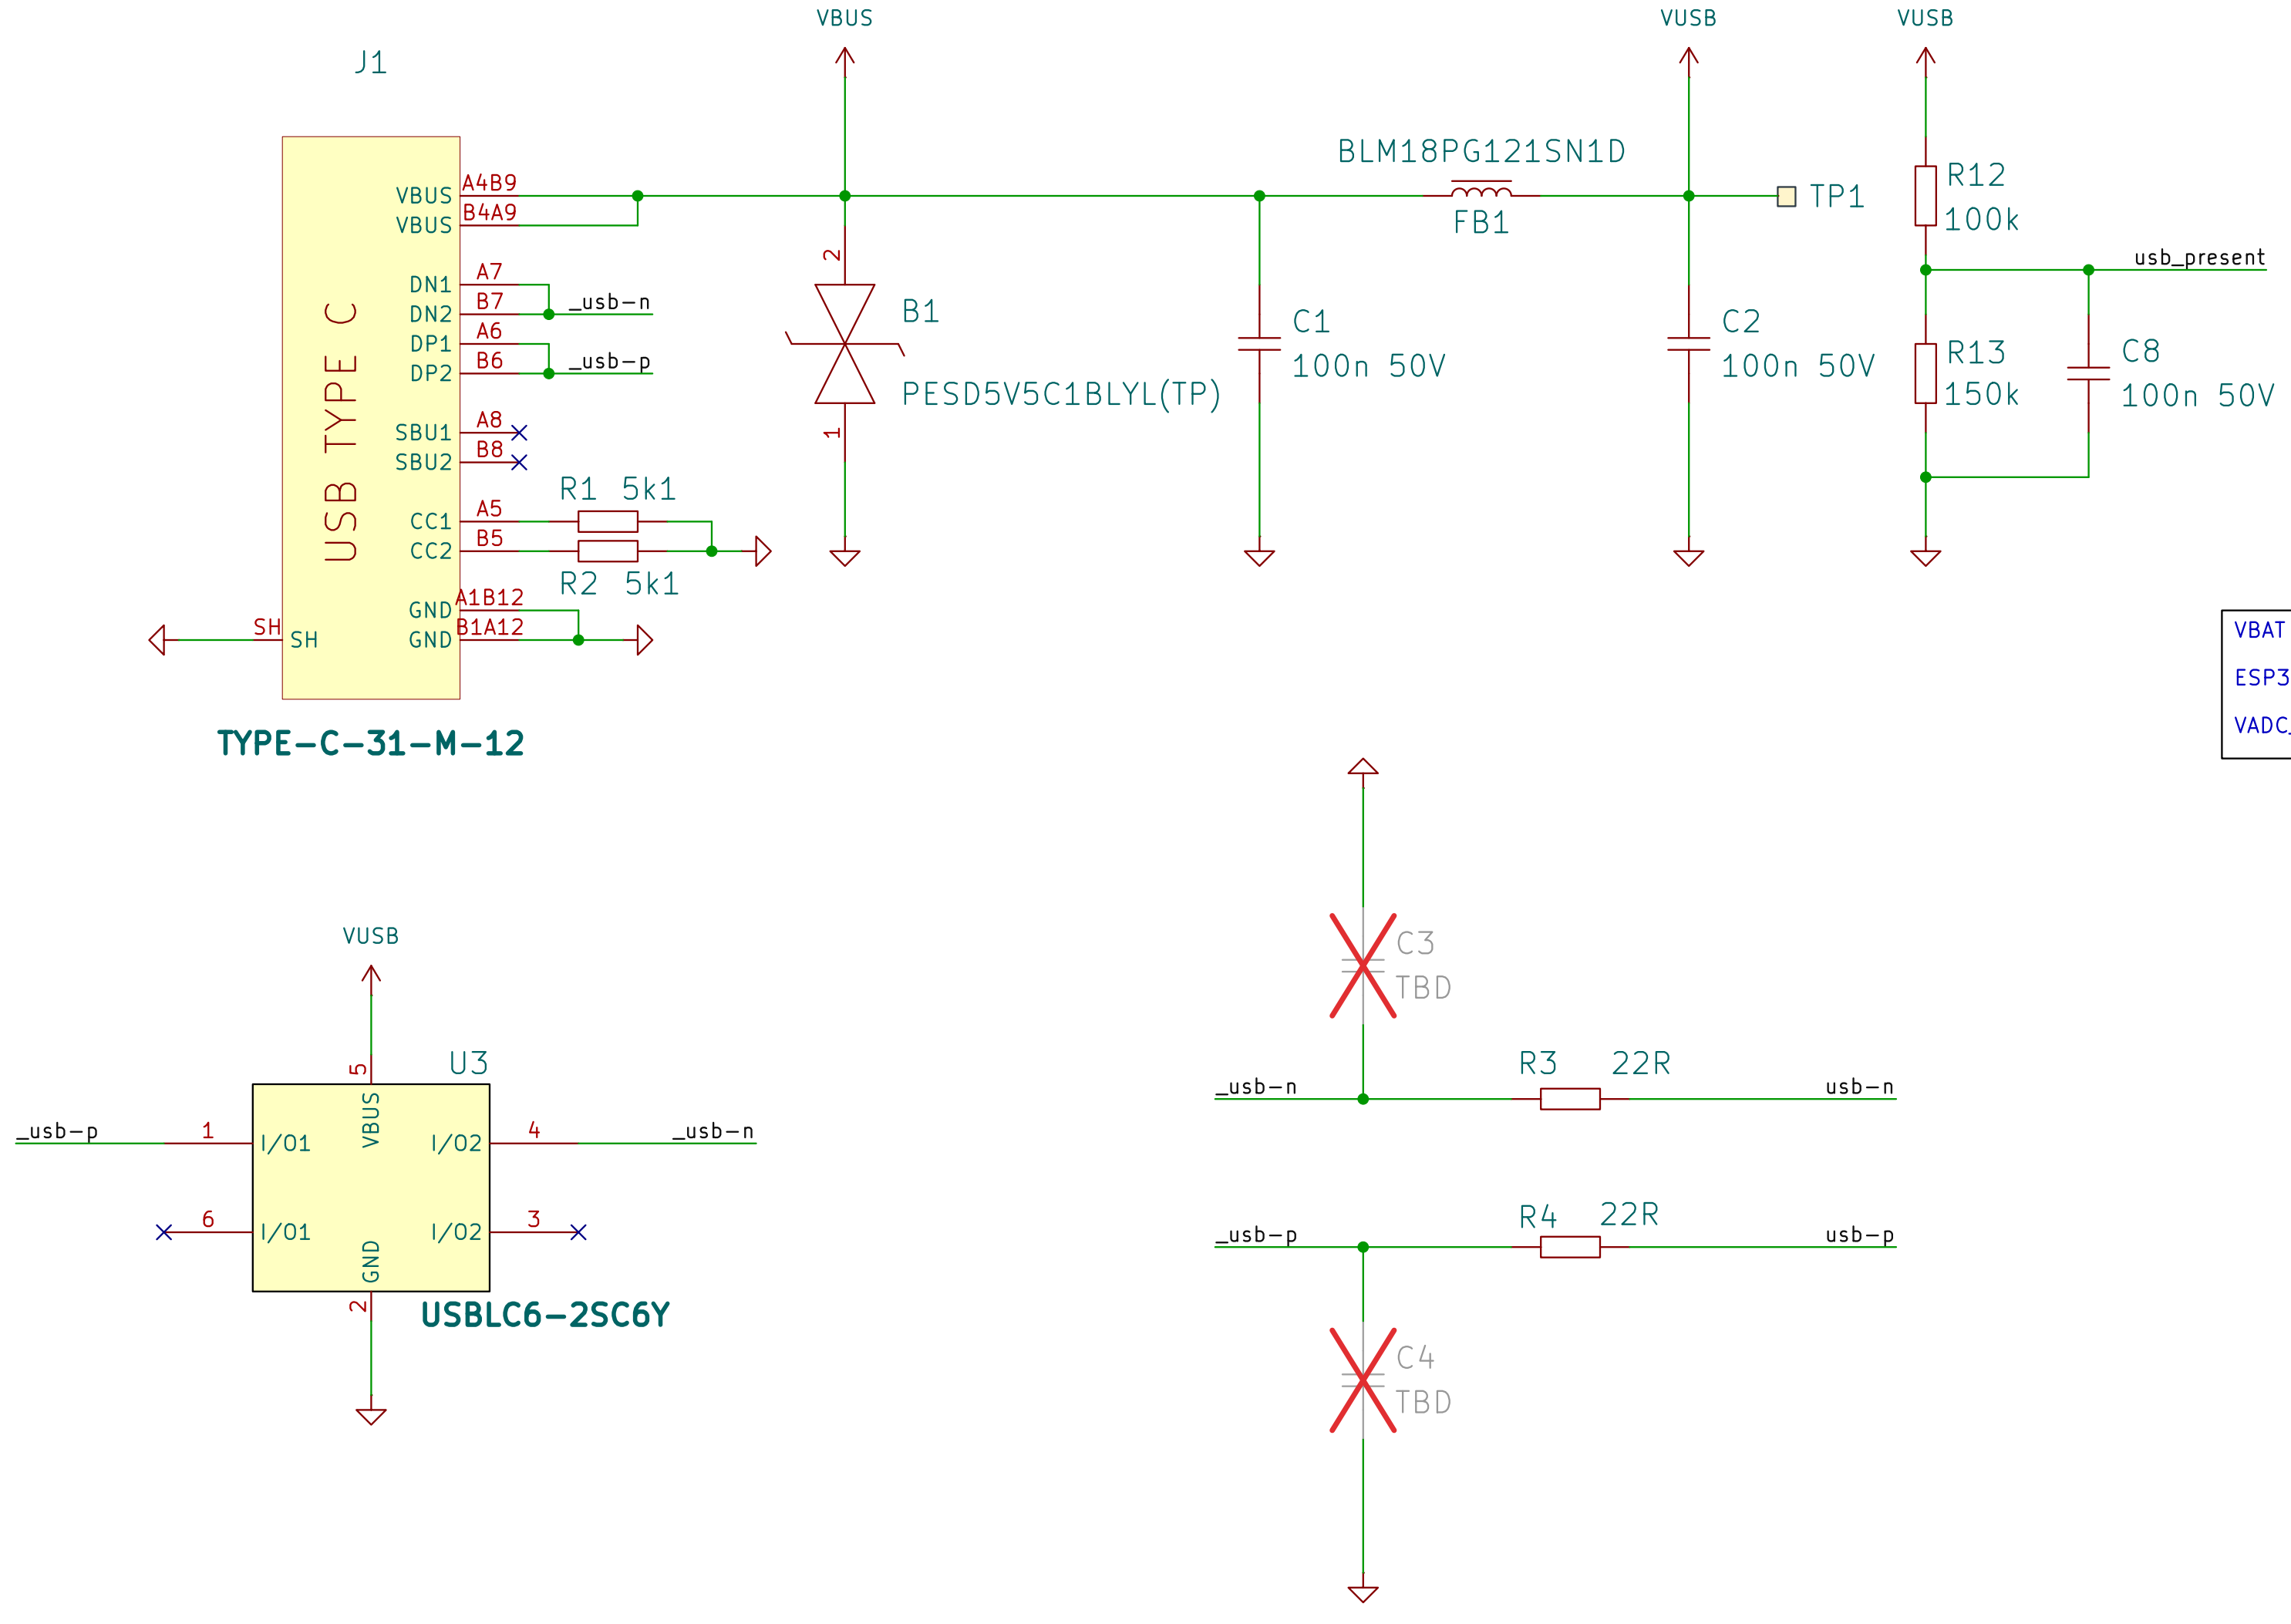

VBAT MAX = 4.2V
ESP32 VREF = 1.1V
VADC_MAX = (120k/(120k + 340k)) x 4.2V = 1.096V

BATTERY COIN CELL

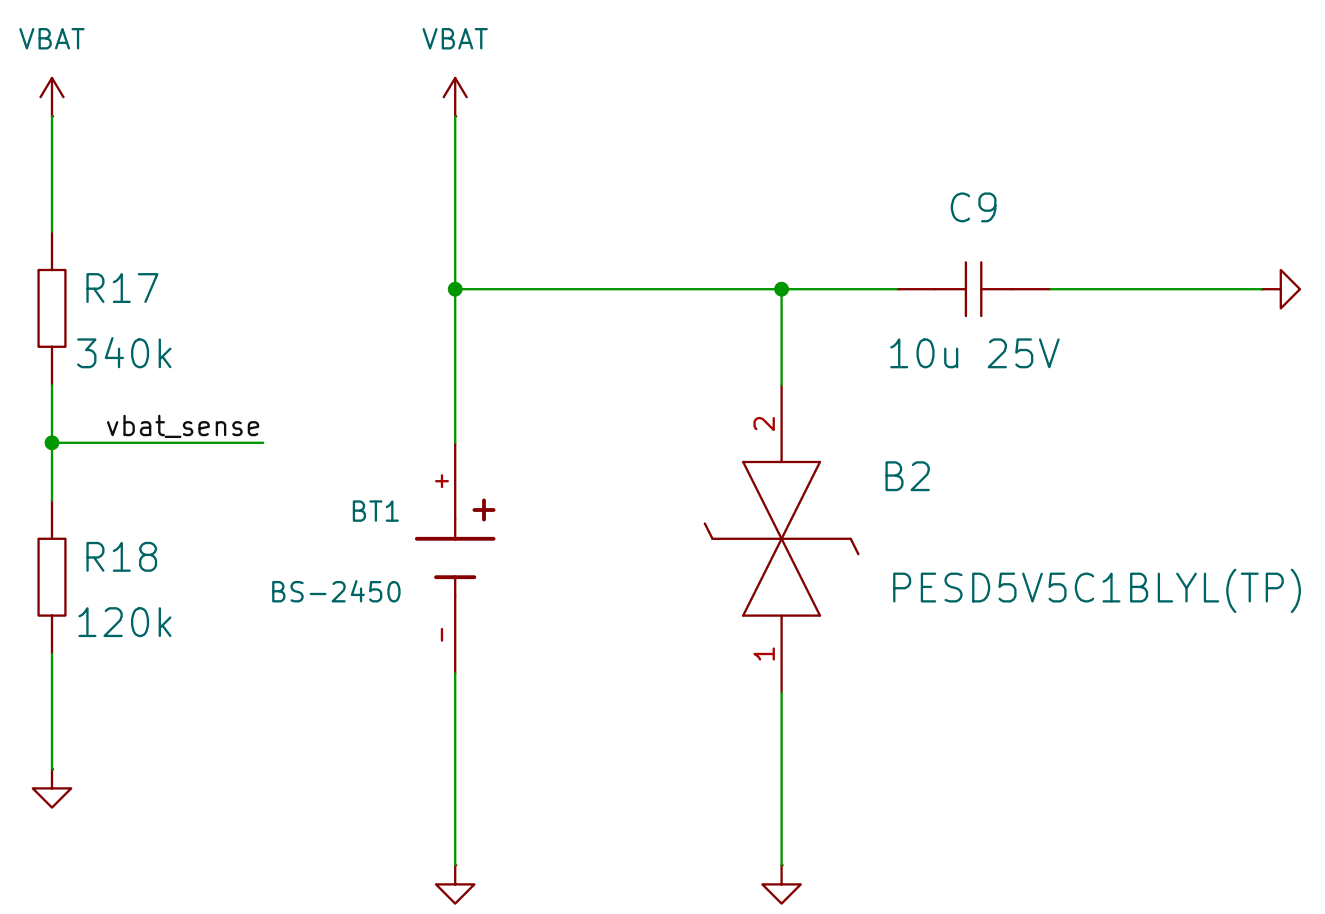

MCU

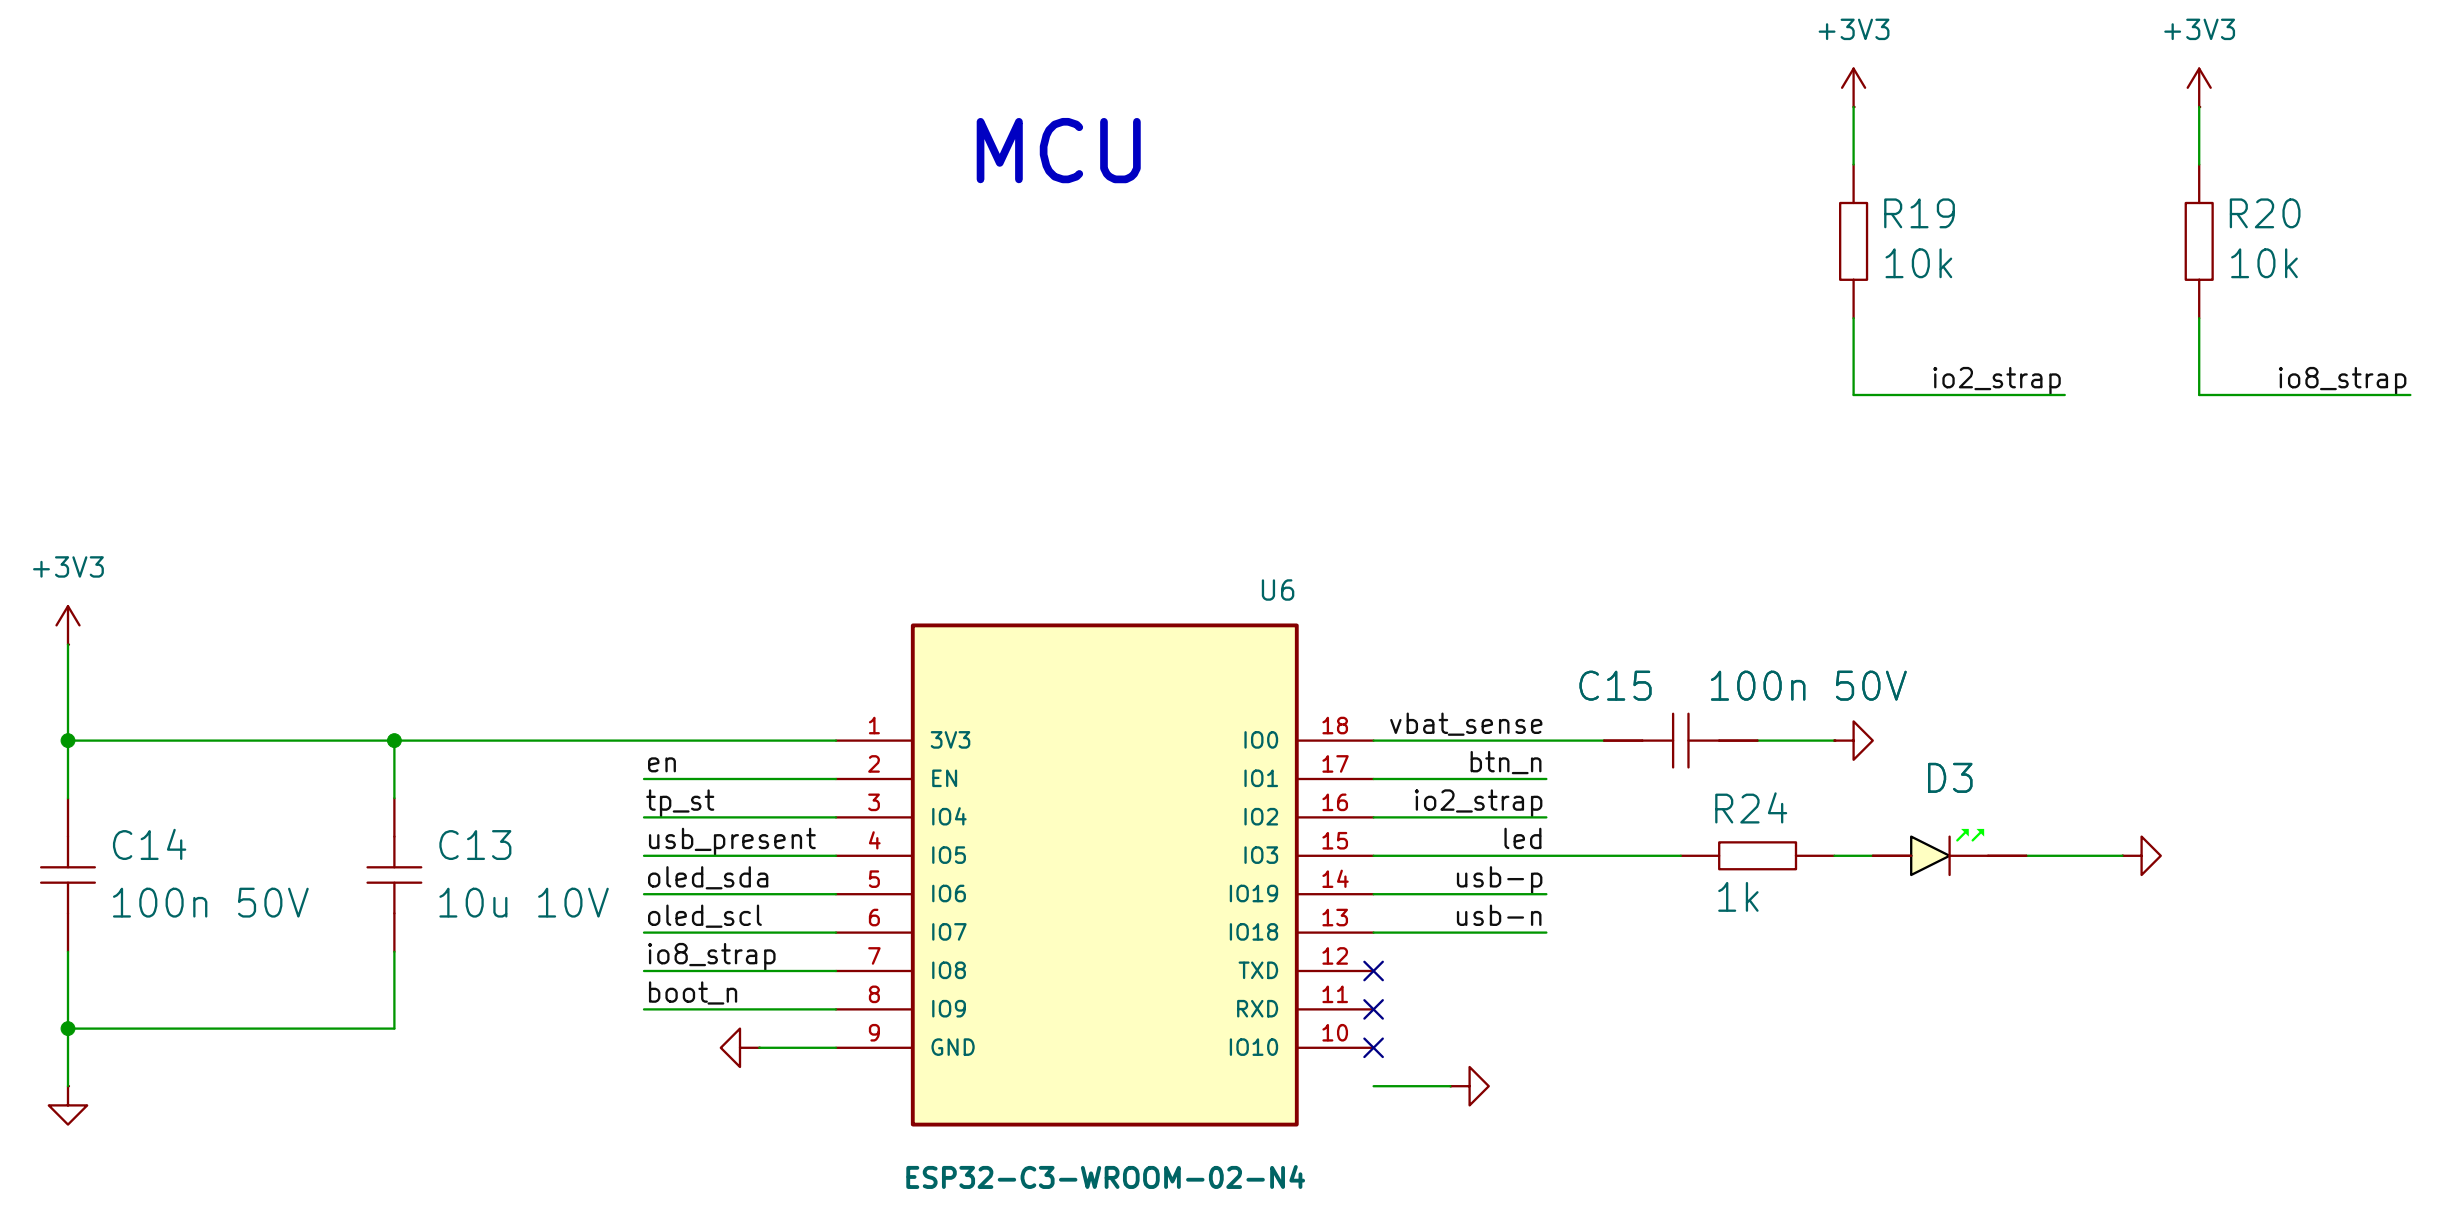

3V3 BUCK-BOOST

MODE = 1 – Minimum output ripple

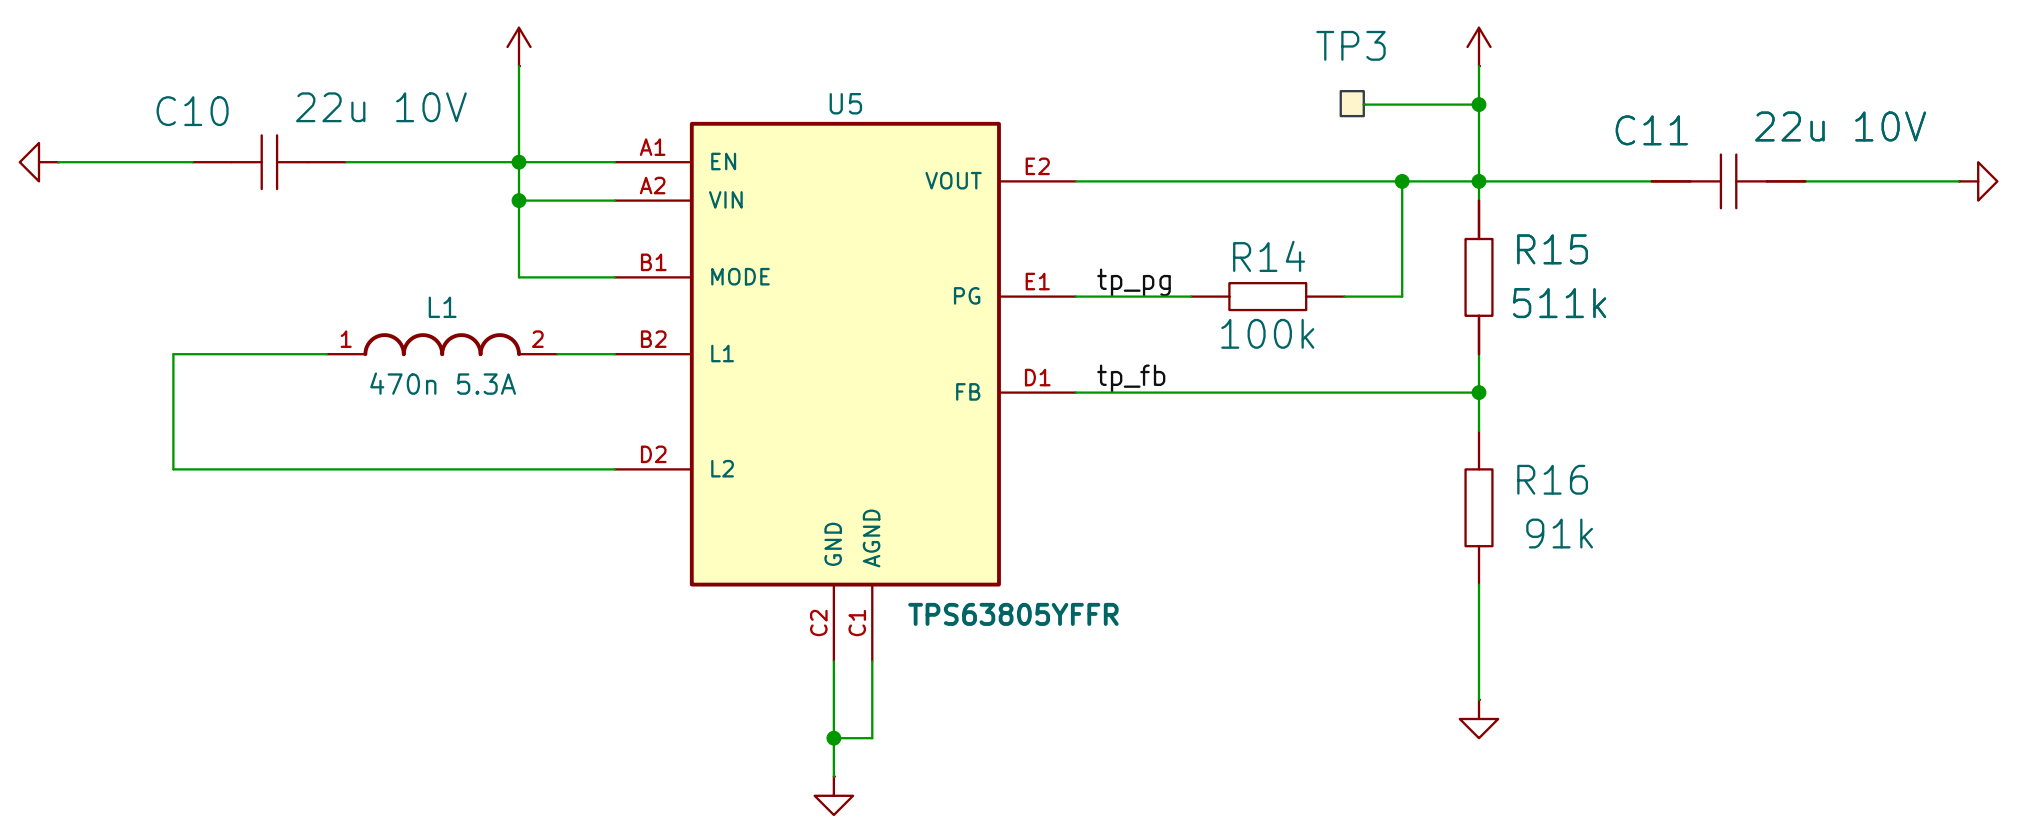

BUTTONS

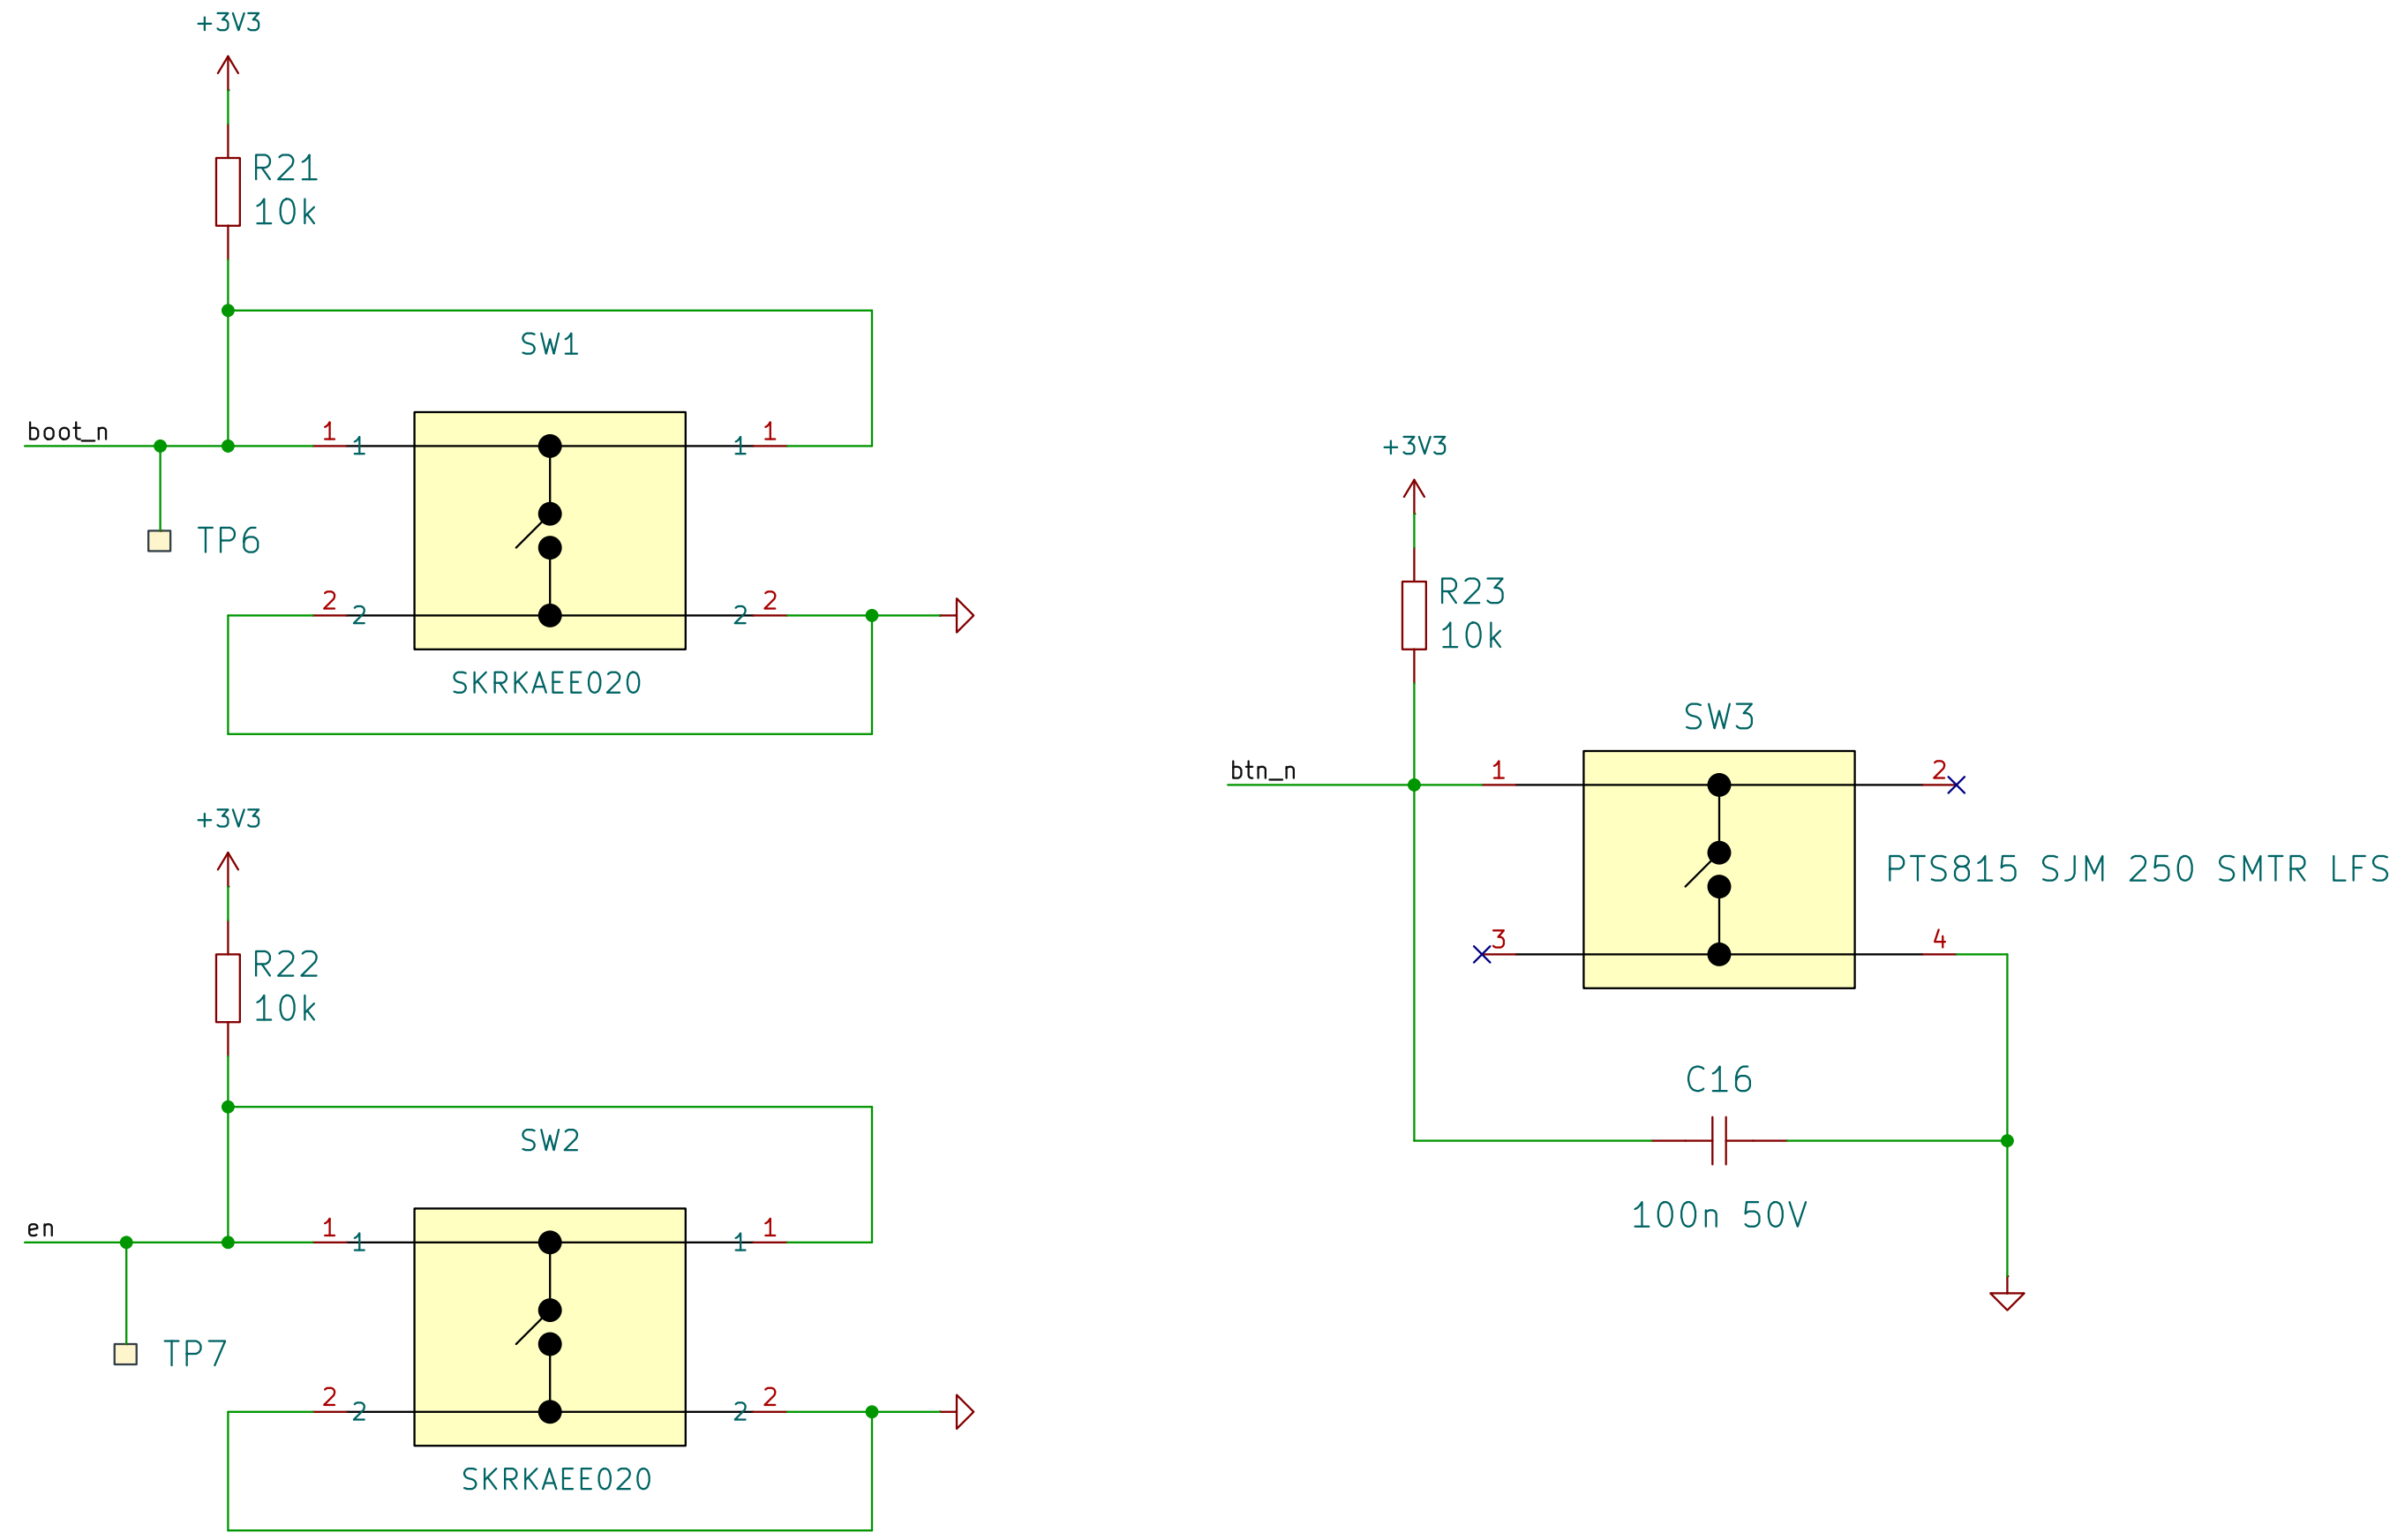

POWER MUX

MODE = VIN – Priority mode

Minimum VREF = 1V
VREF = (150k/(100k + 150k)) x 5V = 3V

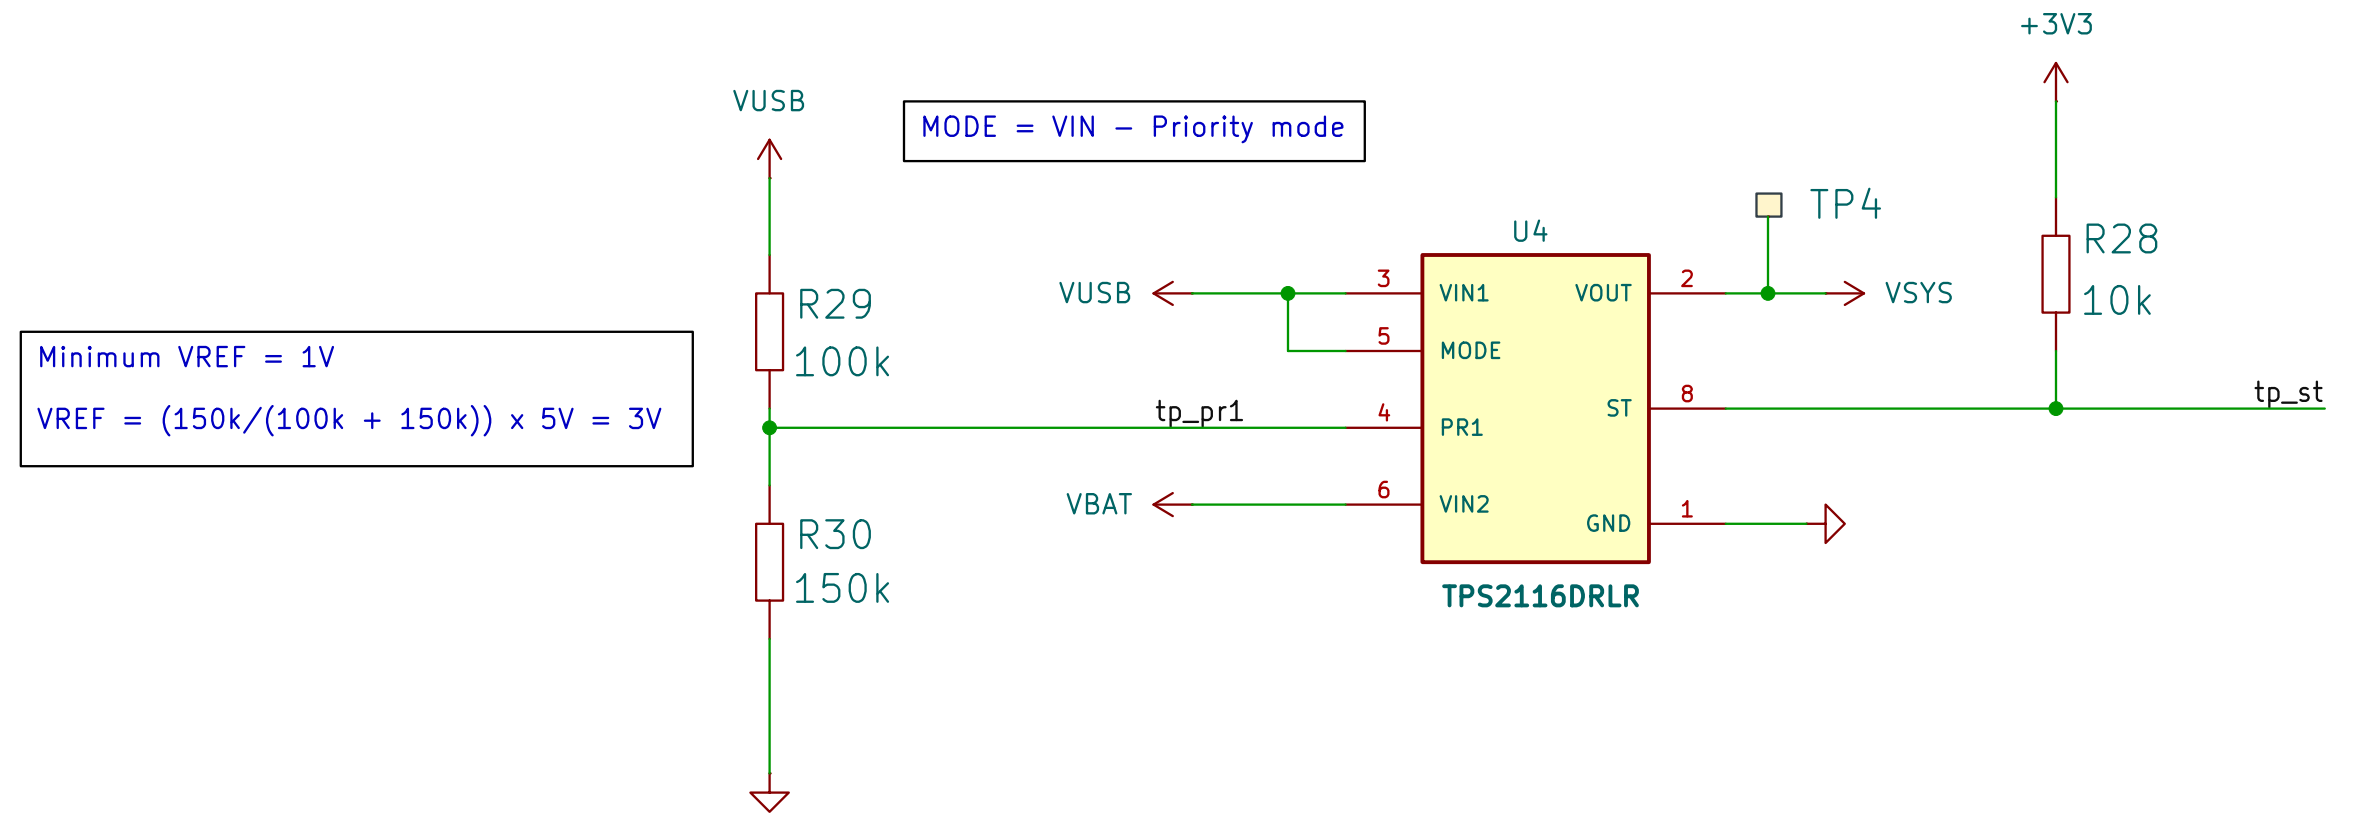

OLED

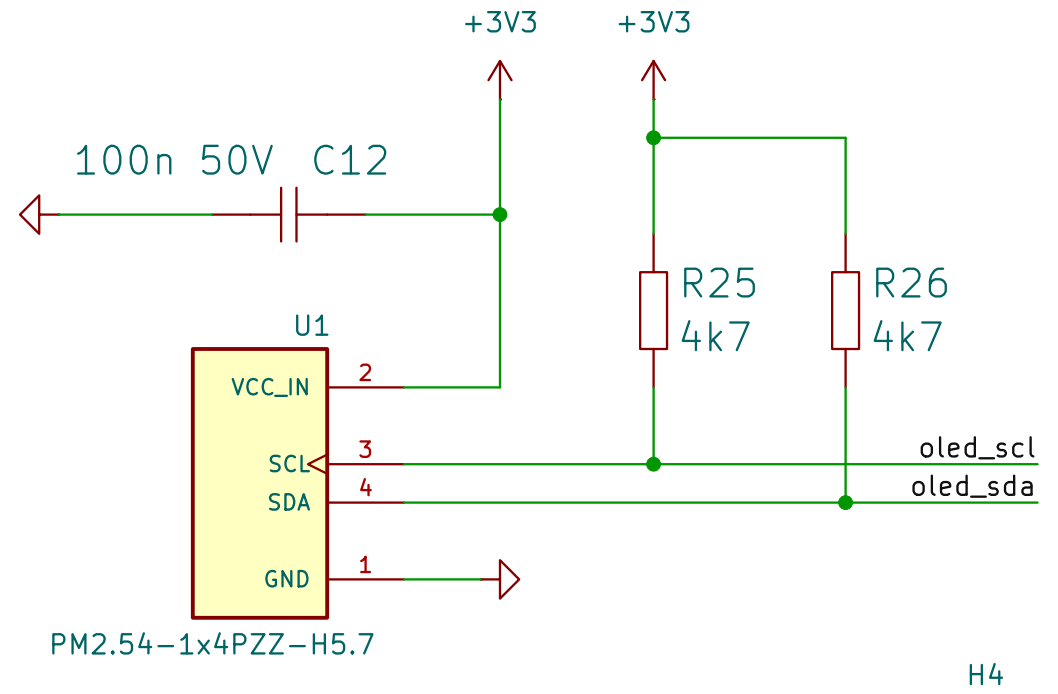

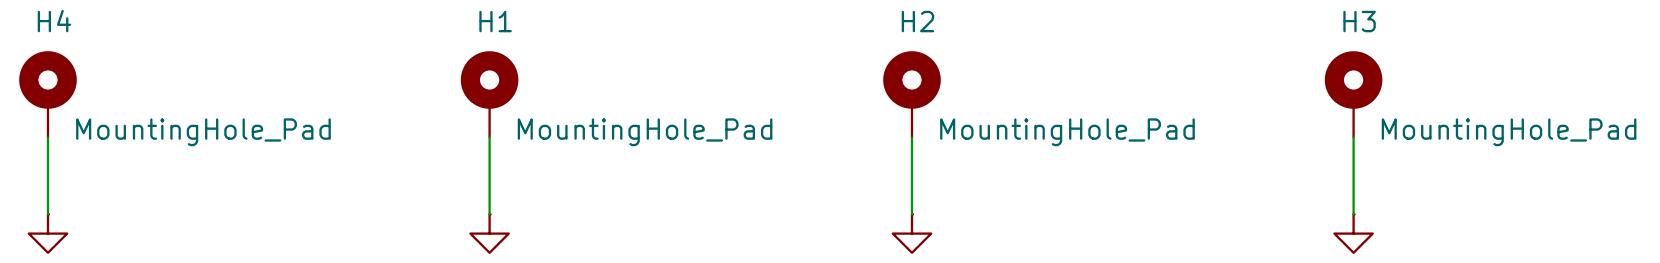

Sheet: /
File: list-tap.kicad_sch
Title: list-tap
Size: User
Date: 2026-10-19
Rev: 2nd
KiCad E.D.A. 10.0.5
Id: 1/1