



USB COMMUNICATION









BATTERY COIN CELL

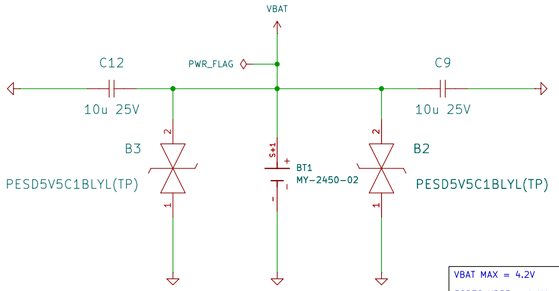





VBAT MAX = 4.2V
ESP32 VREF = 1.1V
VADC_MAX = (120k/(120k + 340k)) x 4.2V = 1.096V




MCU



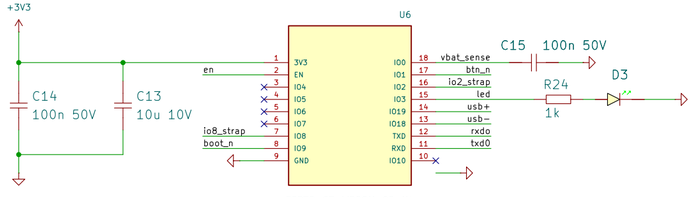



3V3 BUCK-BOOST


MODE = 0 – power saving mode

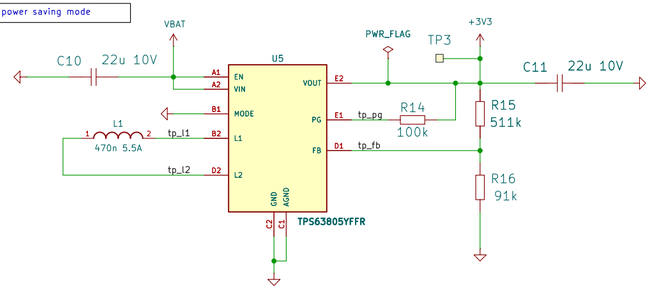


BUTTONS

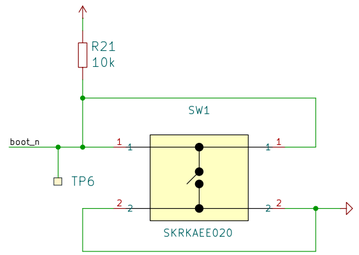

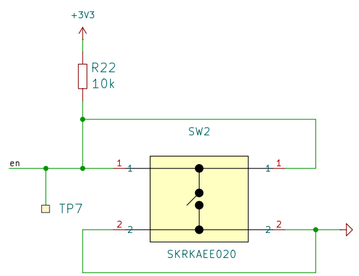

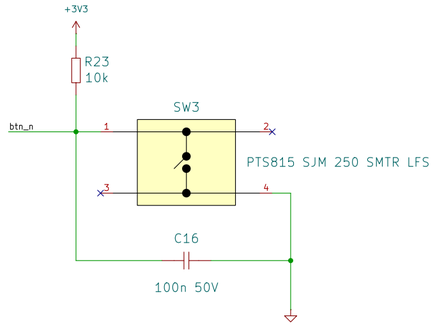



Sheet: /
File: list-tap.kicad_sch
Title: list-tap
Size: User | Date: 2026-10-19 | **Rev: 2nd**
KiCad E.D.A. 10.0.5 | Id: 1/1