


USB COMMUNICATION

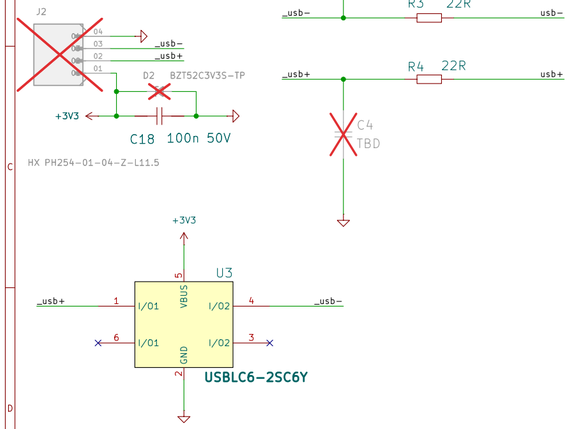

BATTERY COIN CELL

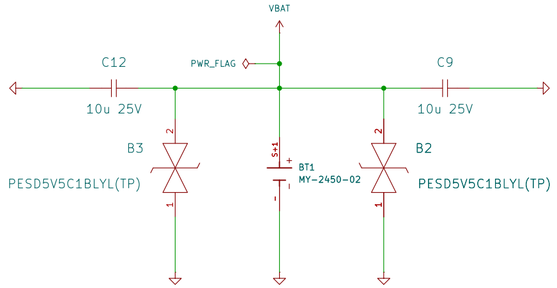





VBAT MAX = 4.2V


ESP32 VREF = 1.1V

VADC_MAX = (120k/(120k + 340k)) x 4.2V = 1.096V




MCU

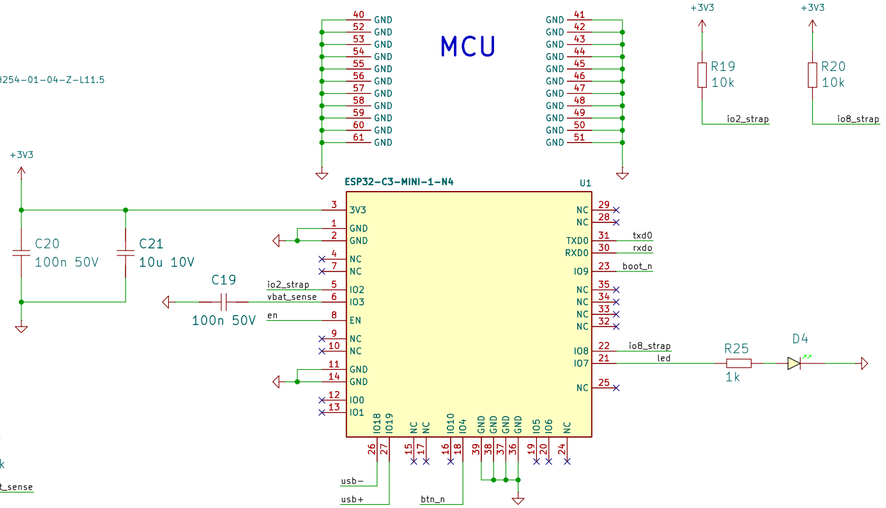





3V3 BUCK-BOOST


MODE = 0 – power saving mode

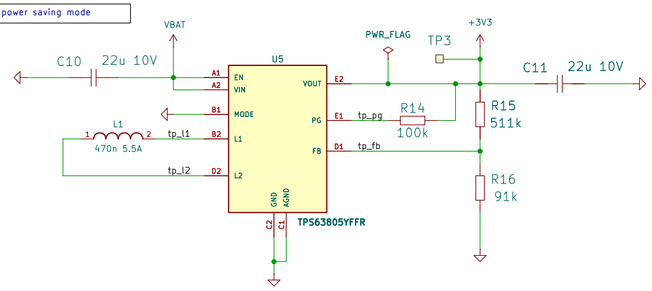

BUTTONS

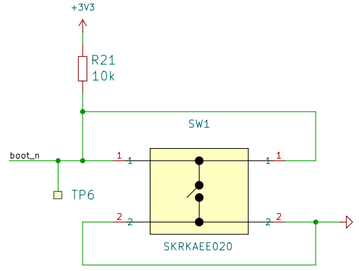

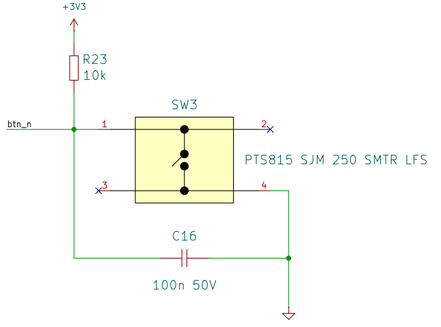



Sheet: /
File: list-tap.kicad_sch

Title: list-tap

Size: User	Date: 2026-10-19	**Rev: 2nd**
KiCad E.D.A. 10.0.5		Id: 1/1