


BLE + USB CONTROLLER




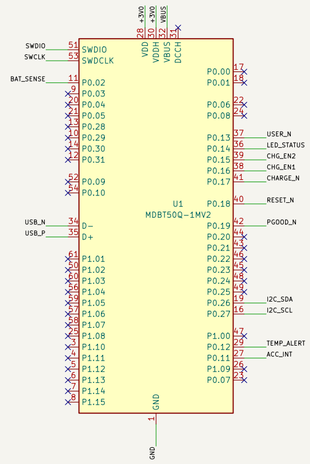

USB-C / PROGRAMMING




















CHARGER / POWER PATH

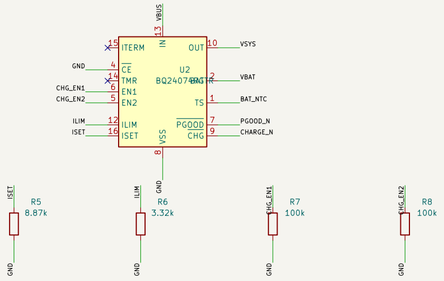

3V0 / BATTERY / POWER CONTROL

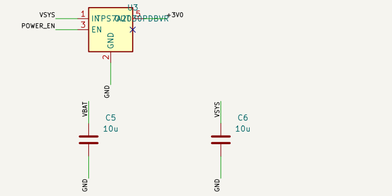

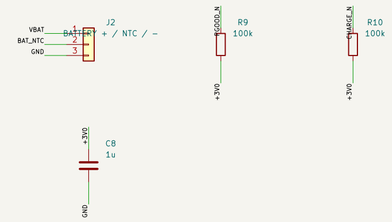











MOTION + SKIN TEMPERATURE






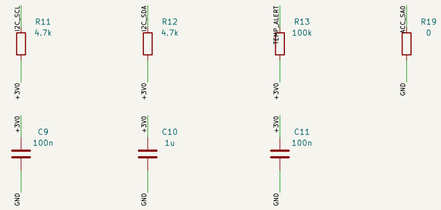



USER INTERFACE











Battery: protected 1S LiPo, >=200mAh, 10k NTC. Charge nominal 100mA; default USB input limit 100mA.

Rev A engineering prototype — not a fabrication release

USB bootloader must be installed over SWD before first USB firmware update.

Independent engineering portfolio

Sheet: /
File: Compact-Bluetooth-Wearable.kicad_sch

Title: Compact Bluetooth Wearable

Size: A2	Date: 2026-10-19	**Rev: A-draft**
KiCad E.D.A. 10.0.7		Id: 1/1