



Federal Office
for Information Security

BSI Technical Guideline TR-03121-3

Biometrics for Public Sector Applications

Part 3: Application Profiles, Function Modules and Processes

Volume 4: Alien Register Enrolment (ARE)

Version 7.0



Federal Office for Information Security
PO Box 20 03 63
53133 Bonn
E-Mail: trbiometrics@bsi.bund.de
Internet: <https://bsi.bund.de>
© Federal Office for Information Security 2025

Table of Contents

1	Volume Alien Register Enrolment	1
1.1	System Overview	1
1.2	Combination of Application Profiles	1
2	Application Profiles	3
2.1	Application Profile Registration with Biometric Identification	3
2.2	Application Profile Document Issuing with Biometric Verification	5
2.3	Application Profile Arrival Attestation Document (Single Process at Counter)	7
2.4	Application Profile Arrival Attestation Document in Special Situations	9
3	Partial Application Processes	12
3.1	PAP ACQ-FI-SV-4: Supervised Facial Image Acquisition	12
3.2	PAP DEL-FI-SV-1: Supervised Facial Image Digital Delivery	13
3.3	PAP ACQ-FP442-SV-2: Supervised Acquisition 4-4-2 for Enrolment without Fall-back Single Finger Acquisition	14
3.4	PAP ACQ-FP4141-SV-2: Supervised Acquisition 4-1-4-1 for Enrolment without Fall-back Single Finger Acquisition	16
3.5	PAP ACQ-FP10R-SV-1: Ten Finger Rolled Supervised Acquisition for Enrolment	18
4	Function Modules	21
4.1	FM Category Acquisition Hardware	21
4.2	FM Category Acquisition Software	25
4.3	FM Category Biometric Image Processing	29
4.4	FM Category Quality Assessment	30
4.5	FM Category Presentation Attack Detection	37
4.6	FM Category Compression	38
4.7	FM Category Operation	39
4.8	FM Category User Interface	40
4.9	FM Category Reference Storage	43
4.10	FM Category Biometric Comparison	43
4.11	FM Category Logging	44
4.12	FM Category Coding	47
	List of Abbreviations	49
	Bibliography	50

List of Figures

1.1. System Architecture Overview Alien Register Enrolment	1
1.2. Overview Process with Application Profiles to Combine	2
2.1. Process Overview Registration with Biometric Identification	4
2.2. Process Overview Issuing with Biometric Verification	6
2.3. Process Overview Arrival Attestation Document	8
2.4. Process Overview Arrival Attestation Document in Special Situations	10
3.1. Partial Application Process "Supervised Facial Image Acquisition"	12
3.2. Partial Application Process Task "Capture Live Facial Image"	13
3.3. Partial Application Process "Supervised Facial Image Digital Delivery"	14
3.4. Partial Application Process "Supervised Acquisition 4-4-2 for Enrolment without Fall-back Single Finger Acquisition"	14
3.5. Partial Application Process Task "Capture Slap Supervised without Fall-back Single Finger Acquisition"	16
3.6. Partial Application Process "Supervised Acquisition 4-1-4-1 for Enrolment without Fall-back Single Finger Acquisition"	16
3.7. Partial Application Process Task "Capture Slap Supervised without Fall-back Single Finger Acquisition"	18
3.8. Partial Application Process "Ten Finger Rolled Supervised Acquisition for Enrolment"	18
3.9. Partial Application Process Task "Capture Rolled Finger"	20

1 Volume Alien Register Enrolment

This document defines Application Profiles, Function Modules and Processes for the Alien Register Enrolment (ARE) of biometric data for Identity Documents of asylum seekers.

1.1 System Overview

The main components in this context consist of the Central Identity Registers (CIRs), the Biometric Evaluation Authority (BEA) and the local registration authority as depicted in ►Figure 1.1. Any request for biometric and biographic data retrieval or storage is performed via the CIRs, which connects and proxies further background systems. The BEA represents the destination for log files documenting the process in detail. The applicant appears in person at the local registration authority, where an operator controls the live enrolment equipment and guides the process.

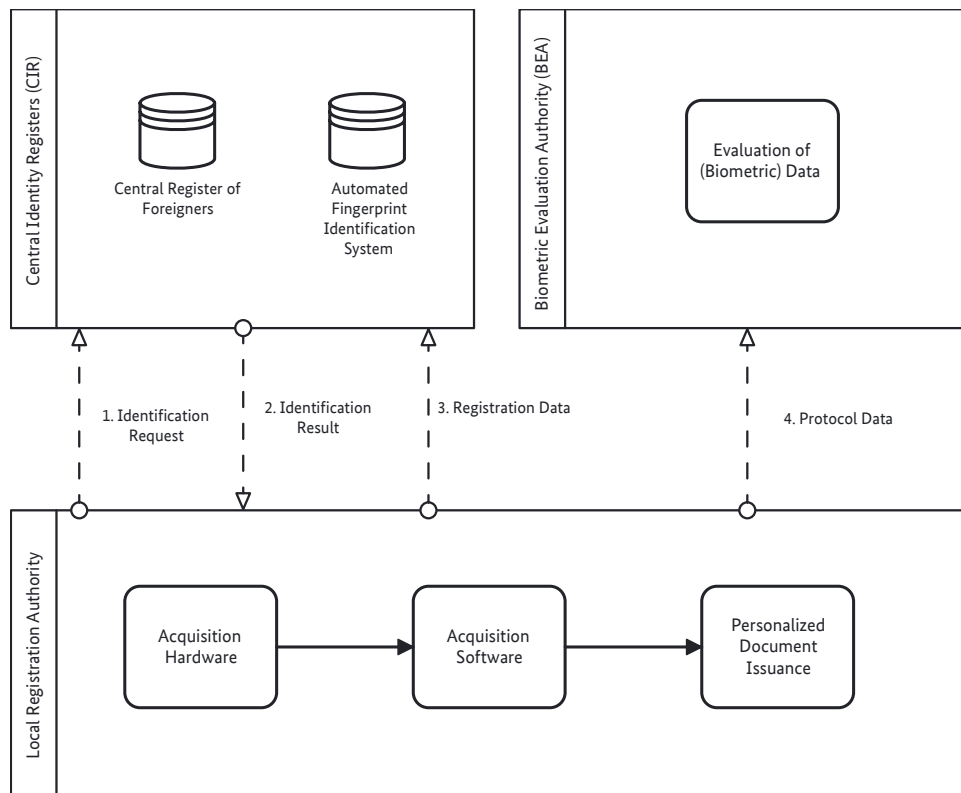


Figure 1.1. System Architecture Overview Alien Register Enrolment

In the depicted architecture, the CIRs comprises of the Central Register of Foreigners (operated by Federal Office of Administration) in conjunction with the Automated Fingerprint Identification System (AFIS) (operated by Federal Criminal Office). The BEA is also operated by the Federal Office of Administration.

1.2 Combination of Application Profiles

The volume ARE offers four Application Profiles, see ►Figure 1.2

This version of the Technical Guideline implements a new modularisation of process steps. The registration of foreigners, and the document issuing are separated into two Application Profiles to allow for splitting of the processes within the agencies.

In this case, the whole process of "alien enrolment" always requires both application profiles: ►Application Profile Registration with Biometric Identification and ►Application Profile Document Issuing with Biometric Verification.

Alternatively to this modularised approach, a full process at the counter is still possible (see ►Application Profile Arrival Attestation Document (Single Process at Counter)).

In addition, the Registration in Special Situations (see ►Application Profile Arrival Attestation Document in Special Situations can be used where the Ministry of Interior allows for it.

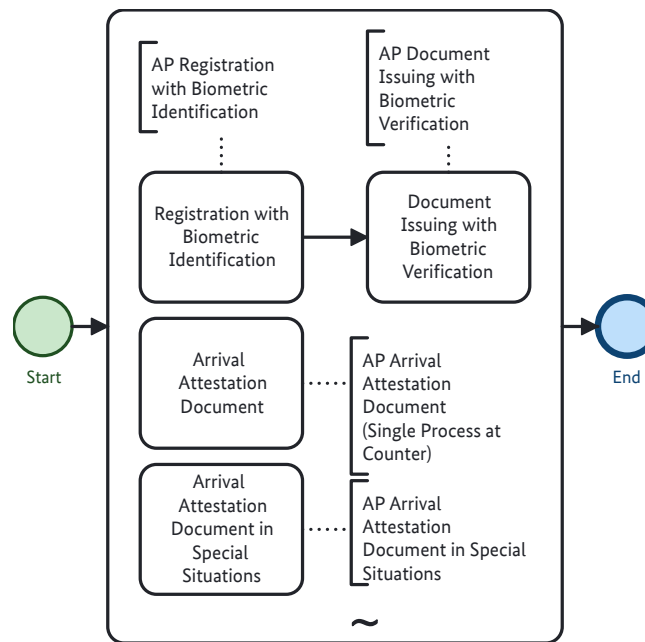


Figure 1.2. Overview Process with Application Profiles to Combine

2 Application Profiles

The following sections specify the Application Profiles of this Volume.

2.1 Application Profile Registration with Biometric Identification

The following Application Profile Registration with Biometric Identification describes the necessary registration steps with the supervised acquisition of plain fingerprints and facial image. The process is either performed at a counter or MAY also be integrated into a self-service system (SSS) where all facial and fingerprint acquisitions as well as the delivery of facial images (if present) SHALL also be supervised by an operator during these processes (see details in ▶Section 2.1.1). Note, this Application Profile can only be used with a following biometric verification according to ▶Application Profile Document Issuing with Biometric Verification.

Function Modules (FMs) may feature additional rules and requirements. The requirements for the application and issuance of an Arrival Attestation Document are determined by national law [BIB_AsyIG] §63a according to [BIB_AKNV]. By legal requirements, the enrolment of the applicant's facial image and fingerprints (only for applicants 14 years of age or older) is REQUIRED. In addition to the issued document, the recorded information must be transferred to the Central Register of Foreigners (according to [BIB_AZRG] §3 and [BIB_AZRGDV] §5).

2.1.1 Mandatory Process

The main process SHALL begin with the capture of up to ten plain fingerprints from the applicant and a subsequent identification request. Therefore, the resulting plain fingerprints are sent to the CIR in order to perform a biometric identification and check whether the applicant has already been registered upfront. The returned result is either empty or contains a set of identification results. In case the identification fails, i.e. no record is returned from the CIR, a new data record for the applicant SHALL be created and subsequently sent to the CIR for storage.

The usage of one or more facial images of the applicant from a retrieved CIR record is OPTIONAL, however these facial images SHALL be assessed in regard to quality requirements and re-usability for the issuance of the Arrival Attestation Document. If no facial image is used from the CIR, a high quality image SHALL be captured live by the operator using a facial image camera with subsequently applied Quality Assessment (QA). Note that in general this Application Profile allows for high quality digital cameras only. The use of webcams is only permitted within the context of a special situation, which is defined in a different Application Profile.

If a SSS is used, which is located within the agency and is connected directly to the agency's local network, the facial image and the plain fingerprints are acquired live at the SSS, supervised by an agency's operator directly in the area of the SSS. The respective acquisition processes SHALL only start, if the operator is present. The results SHALL be evaluated by the operator. The results SHALL not be shown to the applicant or other persons standing around at the SSS but are only stored in the local database to be used for further enrolment at the counter. The results SHALL be shown to the operator in the SSS area on a separate display/device. Also, biographic data or other information may be acquired at the SSS, however this is not in the focus of this Technical Guideline. The acquisition of rolled fingerprints, further enrolment and the issuance of the Arrival Attestation Document is performed later at the counter, described in ▶Application Profile Document Issuing with Biometric Verification.

The applicant's biographic and biometric data including process and quality information are coded and passed to the calling application, which directs the data to the back-end system for enrolment. Further steps in the application process, i.e. the acquisition of rolled fingerprints, are performed at the counter and are described in ▶Application Profile Document Issuing with Biometric Verification.

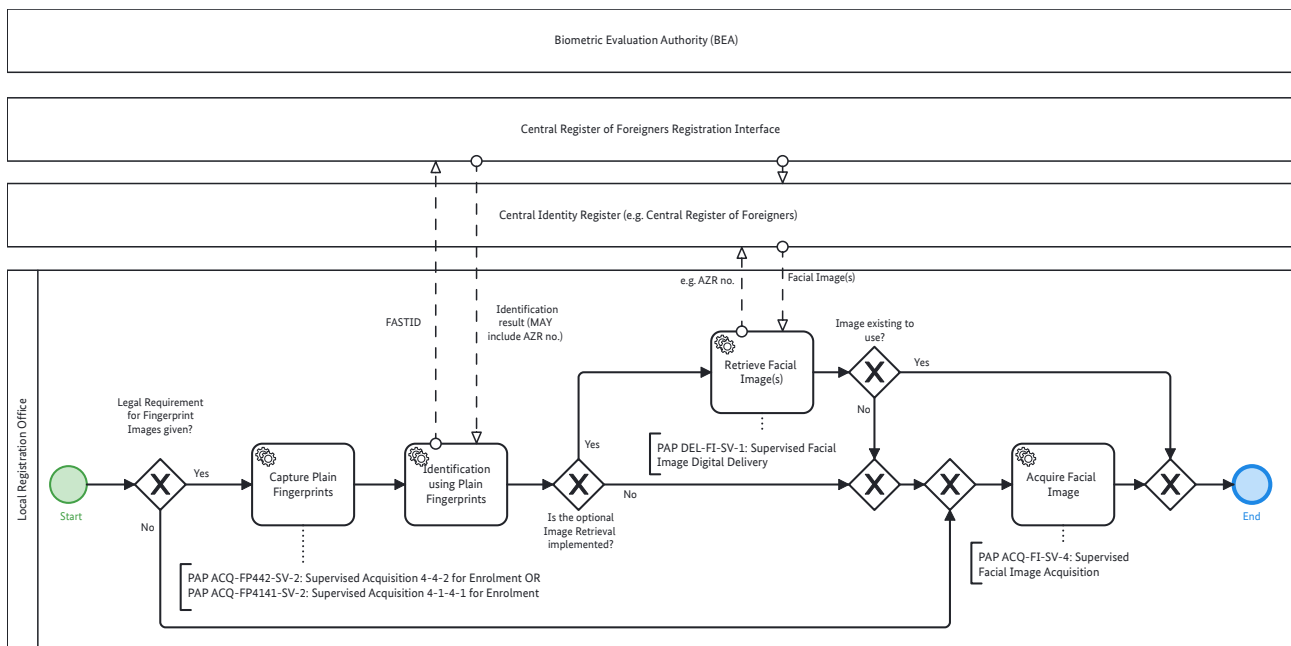


Figure 2.1. Process Overview Registration with Biometric Identification

2.1.2 Relevant Standards and Conditions

In addition to the legal requirements, further basic directives and standards are applicable.

- [BIB_GSAT3]
- [BIB_ISO_19794_FACE]
- [BIB_ISO_19794_FINGER]

2.1.3 Mandatory Function Modules

All Function Modules which SHALL be applied for this Application Profile are listed in ▶ Table 2.1. All listed Function Modules (separated by commas) are REQUIRED for this Application Profile unless specified otherwise. Function Modules separated by slash are alternatives to each other. Function Modules in brackets are RECOMMENDED.

Module Category	Required Function Modules
Acquisition Hardware	▶FM AH-FI-DC / ▶FM AH-FI-SSS2, ▶FM AH-FI-ICS2 ▶FM AH-FP-ALL / ▶FM AH-FP-OPT
Acquisition Software	▶FM AS-FI-DC / ▶FM AS-FI-ICS2, ▶FM AS-FI-ICS3 ▶FM AS-FP-MF, (▶FM AS-FP-SLP)
Biometric Image Processing	▶FM BIP-FI-DC-HQ ▶FM BIP-FP-APP
Quality Assessment	▶FM QA-FI-PG, ▶FM QA-FI-GENERIC, ▶FM QA-FI-ARE ▶FM QA-FP-APP
Presentation Attack Detection	▶FM PAD-FP-APP
Compression	▶FM COM-FI-GENERIC ▶FM COM-FI-JPG ▶FM COM-FP-WSQE
Operation	▶FM O-FI-ALL ▶FM O-FI-DC ▶FM O-FP-ALL

Module Category	Required Function Modules
User Interface	▶FM UI-FI-OP / ▶FM UI-FI-BSJ ▶FM UI-FP-OP, ▶FM UI-FP-BSJ
Reference Storage	▶FM REF-FI-ARE ▶FM REF-FP-ARE
Biometric Comparison	-
Logging	▶FM LOG-ALL-ARE ▶FM LOG-FI-GENERIC ▶FM LOG-FP-GENERIC
Coding	▶FM COD-ALL-ARE ▶FM COD-FI-GSAT3 ▶FM COD-FP-GSAT3
Evaluation	-

Table 2.1 Required Function Modules for Application Profile Arrival Attestation Document

2.1.4 Mandatory Partial Application Processes

All Partial Application Processes and Tasks which SHALL be applied for this Application Profile are listed in ▶Table 2.2. All listed Processes (separated by commas) are REQUIRED for this Application Profile unless specified otherwise. Processes separated by slash are alternatives to each other. Patial Application Processes in brackets are OPTIONAL.

No.	Required Partial Application Process
1	▶PAP ACQ-FP442-SV-2: Supervised Acquisition 4-4-2 for Enrolment without Fall-back Single Finger Acquisition / ▶PAP ACQ-FP4141-SV-2: Supervised Acquisition 4-1-4-1 for Enrolment without Fall-back Single Finger Acquisition
2	▶PAP ACQ-FI-SV-4: Supervised Facial Image Acquisition
3	(▶PAP DEL-FI-SV-1: Supervised Facial Image Digital Delivery)

Table 2.2 Required Partial Application Processes Application Profile Arrival Attention Document

2.2 Application Profile Document Issuing with Biometric Verification

The following Application Profile describes the issuing of an Arrival Attestation Document with biometric verification at the counter, i.e. the verification of rolled fingerprints with the previously acquired plain fingerprints of ▶Application Profile Registration with Biometric Identification. Agency's having this Application Profile implemented are also REQUIRED to have the previous ▶Application Profile Registration with Biometric Identification implemented.

FMs may have additional transition rules for their requirements.

2.2.1 Mandatory Process

Rolled fingerprints SHALL be captured at the counter. If during this sub-process a restart of the total fingerprint acquisition is triggered all previous fingerprint records (both plain and rolled fingerprints) are discarded and SHALL be re-acquired.

The applicant's biometric data including process and quality information are coded and passed to the calling application, which directs the data to the back-end system for enrolment. The Arrival Attestation Document is printed before the logging is performed and the resulting XML files are sent to the Biometric Evaluation Authority (BEA).

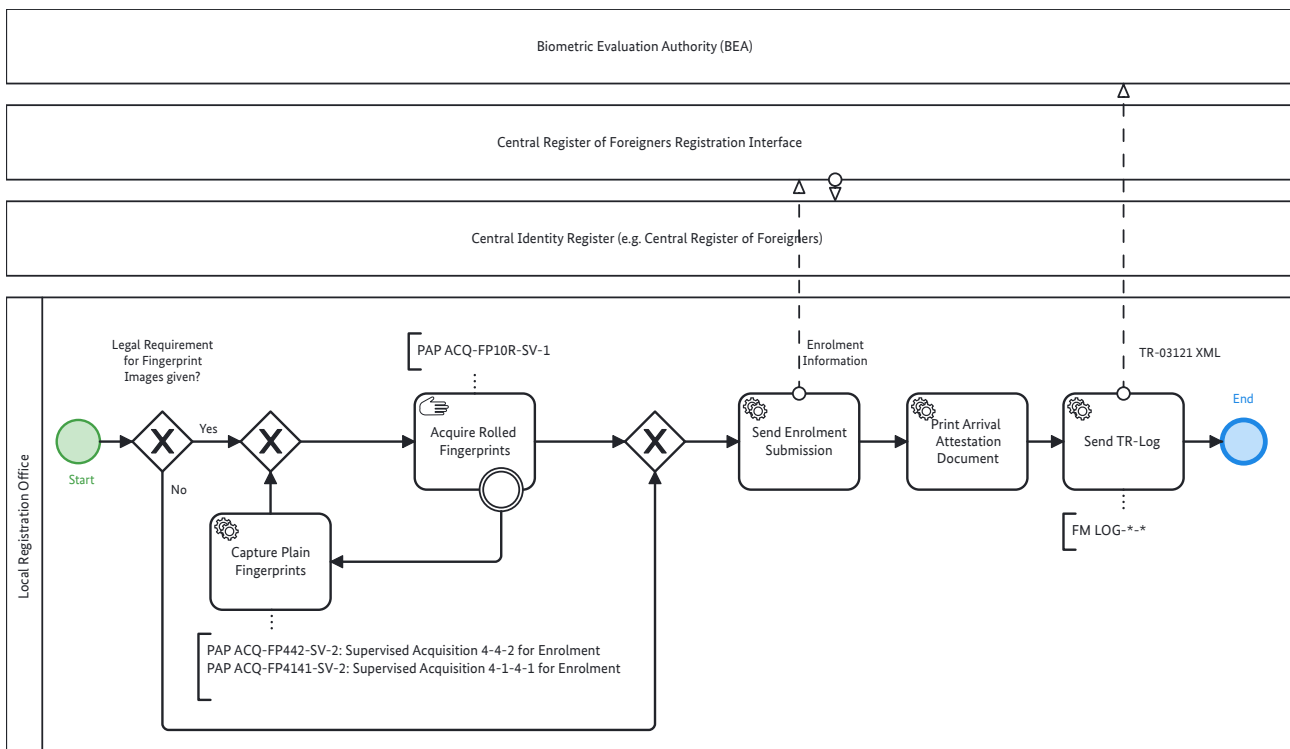


Figure 2.2. Process Overview Issuing with Biometric Verification

2.2.2 Relevant Standards and Conditions

In addition to the legal requirements, further basic directives and standards are applicable.

- [BIB_GSAT3]
- [BIB_ISO_19794_FACE]
- [BIB_ISO_19794_FINGER]

2.2.3 Mandatory Function Modules

All Function Modules which SHALL be applied for this Application Profile are listed in ▶Table 2.3. All listed Function Modules (separated by commas) are REQUIRED for this Application Profile unless specified otherwise. Function Modules separated by slash are alternatives to each other. Function Modules in brackets are RECOMMENDED.

Module Category	Required Function Modules
Acquisition	▶FM AH-FP-ALL / ▶FM AH-FP-OPT
Acquisition Software	▶FM AS-FP-ROLL ▶FM AS-FP-MF, (▶FM AS-FP-SLP)
Biometric Image Processing	▶FM BIP-FP-APP
Quality Assessment	▶FM QA-FP-APP
Presentation Attack Detection	▶FM PAD-FP-APP
Compression	▶FM COM-FP-WSQE
Operation	▶FM O-FP-ALL
User Interface	▶FM UI-FP-OP, ▶FM UI-FP-BSJ
Reference Storage	▶FM REF-FP-ARE
Biometric Comparison	▶FM CMP-FP-CV

Module Category	Required Function Modules
Logging	▶FM LOG-ALL-GENERIC, ▶FM LOG-ALL-ARE ▶FM LOG-FI-GENERIC ▶FM LOG-FP-GENERIC
Coding	▶FM COD-ALL-ARE ▶FM COD-FI-GSAT3 ▶FM COD-FP-GSAT3
Evaluation	-

Table 2.3 Required Function Modules for Application Profile Arrival Attestation Document

2.2.4 Mandatory Partial Application Processes

All Partial Application Processes and Tasks which SHALL be applied for this Application Profile are listed in ▶Table 2.4. All listed Processes (separated by commas) are REQUIRED for this Application Profile unless specified otherwise. Processes separated by slash are alternatives to each other.

No.	Required Partial Application Process
1	▶PAP ACQ-FP10R-SV-1: Ten Finger Rolled Supervised Acquisition for Enrolment
2	▶PAP ACQ-FP442-SV-2: Supervised Acquisition 4-4-2 for Enrolment without Fall-back Single Finger Acquisition / ▶PAP ACQ-FP4141-SV-2: Supervised Acquisition 4-1-4-1 for Enrolment without Fall-back Single Finger Acquisition

Table 2.4 Required Partial Application Processes Application Profile Arrival Attention Document

2.3 Application Profile Arrival Attestation Document (Single Process at Counter)

The following Application Profile describes the application process for an Arrival Attestation Document in its classic version where the entire process is located at one counter.

FMs may have additional transition rules for their requirements.

2.3.1 Mandatory Process

In any case, the main process SHALL begin with an initial identification request to the CIR. Up to ten plain fingerprints SHALL be captured from the applicant and sent to the CIR in order to perform a biometric identification and check whether the applicant has already been registered upfront. The returned result is either empty or contains a set of identification results. In case the identification fails, i.e. no record is returned from the CIR, a new data record for the applicant SHALL be created and subsequently sent to the CIR for storage.

Rolled fingerprints SHALL be captured additionally. If during this sub-process a restart of the total fingerprint acquisition is triggered all previous fingerprint records (both plain and rolled fingerprints) are discarded and SHALL be re-acquired.

The usage of one or more facial images of the applicant from a retrieved CIR record is OPTIONAL, however these facial images SHALL be assessed in regard to quality requirements and re-usability for the issuance of the Arrival Attestation Document. If no facial image is used from the CIR, a high quality image SHALL be captured live by the operator using a facial image camera with subsequently applied QA. Note that in general this Application Profile allows for high quality digital cameras only. The use of webcams is only permitted within the context of a special situation.

The applicant's biographic and biometric data including process and quality information are coded and passed to the calling application, which directs the data to the back-end system for enrolment. The Arrival Attestation Document is printed before the logging is performed and the resulting XML files are sent to the Biometric Evaluation Authority (BEA).

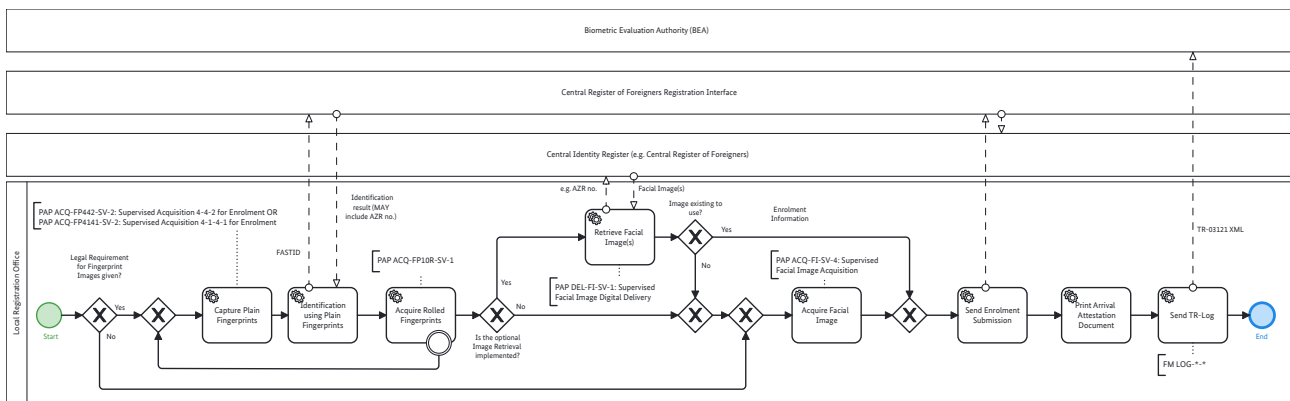


Figure 2.3. Process Overview Arrival Attestation Document

2.3.2 Relevant Standards and Conditions

In addition to the legal requirements, further basic directives and standards are applicable.

- [BIB_GSAT3]
- [BIB_ISO_19794_FACE]
- [BIB_ISO_19794_FINGER]

2.3.3 Mandatory Function Modules

All Function Modules which SHALL be applied for this Application Profile are listed in ▶Table 2.5. All listed Function Modules (separated by commas) are REQUIRED for this Application Profile unless specified otherwise. Function Modules separated by slash are alternatives to each other. Function Modules in brackets are RECOMMENDED.

Module Category	Required Function Modules
Acquisition Hardware	▶FM AH-FI-DC ▶FM AH-FP-ALL / ▶FM AH-FP-OPT
Acquisition Software	▶FM AS-FI-DC ▶FM AS-FP-MF, (▶FM AS-FP-SLP), ▶FM AS-FP-ROLL
Biometric Image Processing	▶FM BIP-FI-DC-HQ ▶FM BIP-FP-APP
Quality Assessment	▶FM QA-FI-PG, ▶FM QA-FI-GENERIC, ▶FM QA-FI-ARE ▶FM QA-FP-APP
Presentation Attack Detection	▶FM PAD-FP-APP
Compression	▶FM COM-FI-GENERIC ▶FM COM-FI-JPG ▶FM COM-FP-WSQE
Operation	▶FM O-FI-ALL ▶FM O-FI-DC ▶FM O-FP-ALL
User Interface	▶FM UI-FI-OP ▶FM UI-FP-OP, ▶FM UI-FP-BSJ
Reference Storage	▶FM REF-FI-ARE ▶FM REF-FP-ARE
Biometric Comparison	▶FM CMP-FP-CV

Module Category	Required Function Modules
Logging	▶FM LOG-ALL-GENERIC, ▶FM LOG-ALL-ARE ▶FM LOG-FI-GENERIC ▶FM LOG-FP-GENERIC
Coding	▶FM COD-ALL-ARE ▶FM COD-FI-GSAT3 ▶FM COD-FP-GSAT3
Evaluation	-

Table 2.5 Required Function Modules for Application Profile Arrival Attestation Document

2.3.4 Mandatory Partial Application Processes

All Partial Application Processes and Tasks which SHALL be applied for this Application Profile are listed in ▶Table 2.6. All listed Processes (separated by commas) are REQUIRED for this Application Profile unless specified otherwise. Processes separated by slash are alternatives to each other. Patial Application Processes in brackets are OPTIONAL.

No.	Required Partial Application Process
1	▶PAP ACQ-FP10R-SV-1: Ten Finger Rolled Supervised Acquisition for Enrolment
2	▶PAP ACQ-FP442-SV-2: Supervised Acquisition 4-4-2 for Enrolment without Fall-back Single Finger Acquisition / ▶PAP ACQ-FP4141-SV-2: Supervised Acquisition 4-1-4-1 for Enrolment without Fall-back Single Finger Acquisition
3	▶PAP ACQ-FI-SV-4: Supervised Facial Image Acquisition
4	(▶PAP DEL-FI-SV-1: Supervised Facial Image Digital Delivery)

Table 2.6 Required Partial Application Processes Application Profile Arrival Attestation Document

2.4 Application Profile Arrival Attestation Document in Special Situations

The following Application Profile describes the whole application process in its previous version for an Arrival Attestation Document in special situations. A special situation is in place, e.g. when the number of applicants for an Arrival Attestation Document is significantly higher than usual due to external events. Note that applications under this profile can only be used at particular (temporary) agencies in charge that are specifically approved for this special situation by the German Federal Ministry of the Interior.

Instead of the usual process (described in ▶Section 2.3), the capture of rolled fingerprints is neglected in favour of the capture of plain fingerprints, as described in ▶Section 3.3 or ▶Section 3.4.

FMs may have additional transition rules for their requirements.

2.4.1 Mandatory Process

In any case, the main process SHALL begin with an initial identification request to the CIR. Up to ten plain fingerprints SHALL be captured from the applicant and sent to the CIR in order to perform a biometric identification and check whether the applicant has already been registered upfront. The returned result is either empty or contains a set of identification results. In case the identification fails, i.e. no record is returned from the CIR, a new data record for the applicant SHALL be created and subsequently sent to the CIR for storage.

The usage of one or more facial images of the applicant from a retrieved CIR record is OPTIONAL, however these facial images SHALL be assessed in regard to quality requirements and re-usability for the issuance of the Arrival Attestation Document. If no facial image is used from the CIR, a facial image SHALL be captured live by the operator using a webcam, which is only permitted within the context of a special situation.

The applicant's biographic and biometric data including process and quality information are coded and passed to the calling application, which directs the data to the back-end system for enrolment. The Arrival Attestation Document is printed before the logging is performed and the resulting XML files are sent to the Biometric Evaluation Authority (BEA).

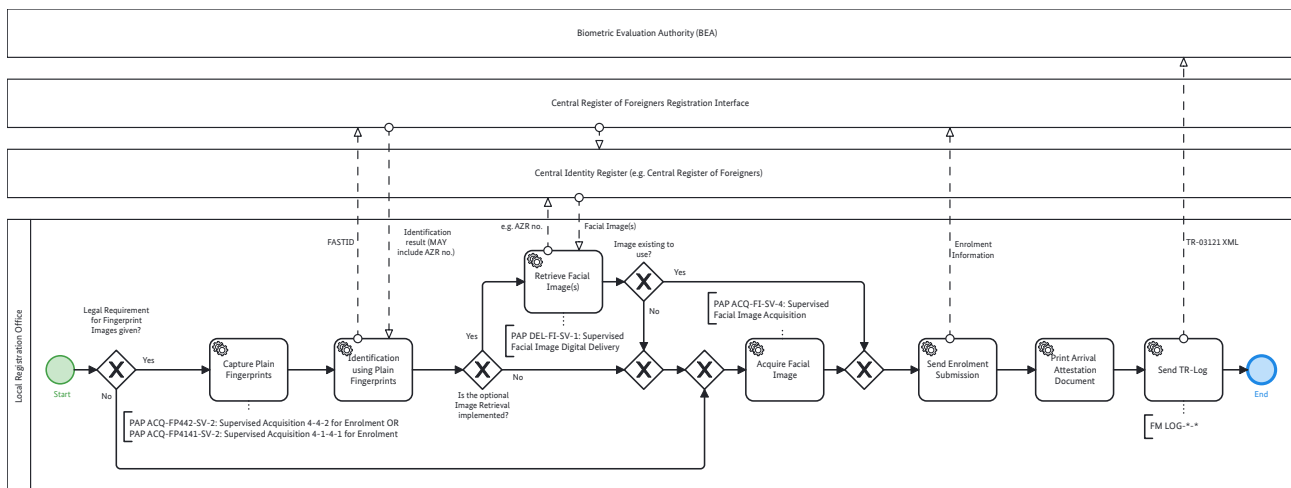


Figure 2.4. Process Overview Arrival Attestation Document in Special Situations

2.4.2 Relevant Standards and Conditions

In addition to the legal requirements, further basic directives and standards are applicable.

- [BIB_GSAT3]
- [BIB_ISO_19794_FACE]
- [BIB_ISO_19794_FINGER]

2.4.3 Mandatory Function Modules

All Function Modules which SHALL be applied for this Application Profile are listed in ▶Table 2.7. All listed Function Modules (separated by commas) are REQUIRED for this Application Profile unless specified otherwise. Function Modules separated by slash are alternatives to each other. Function Modules in brackets are RECOMMENDED.

Module Category	Required Function Modules
Acquisition Hardware	▶FM AH-FI-DC ▶FM AH-FP-ALL / ▶FM AH-FP-OPT
Acquisition Software	▶FM AS-FI-DC ▶FM AS-FP-MF, (▶FM AS-FP-SLP)
Biometric Image Processing	▶FM BIP-FI-DC-HQ ▶FM BIP-FP-APP
Quality Assessment	▶FM QA-FI-PG, ▶FM QA-FI-GENERIC, ▶FM QA-FI-ARE ▶FM QA-FP-APP
Presentation Attack Detection	(▶FM PAD-FP-APP)
Compression	▶FM COM-FI-GENERIC ▶FM COM-FI-JPG ▶FM COM-FP-WSQE
Operation	▶FM O-FI-ALL ▶FM O-FI-DC ▶FM O-FP-ALL
User Interface	▶FM UI-FI-OP ▶FM UI-FP-OP, ▶FM UI-FP-BSJ

Module Category	Required Function Modules
Reference Storage	▶FM REF-FI-ARE ▶FM REF-FP-ARE
Biometric Comparison	▶FM CMP-FP-CV
Logging	▶FM LOG-ALL-GENERIC, ▶FM LOG-ALL-ARE ▶FM LOG-FI-GENERIC ▶FM LOG-FP-GENERIC
Coding	▶FM COD-ALL-ARE ▶FM COD-FI-GSAT3 ▶FM COD-FP-GSAT3
Evaluation	-

Table 2.7 Required Function Modules for Application Profile Arrival Attestation Document

2.4.4 Mandatory Partial Application Processes

All Partial Application Processes and Tasks which SHALL be applied for this Application Profile are listed in ▶Table 2.8. All listed Processes (separated by commas) are REQUIRED for this Application Profile unless specified otherwise. Processes separated by slash are alternatives to each other. Patial Application Processes in brackets are OPTIONAL.

No.	Required Partial Application Process
1	▶PAP ACQ-FP442-SV-2: Supervised Acquisition 4-4-2 for Enrolment without Fall-back Single Finger Acquisition / ▶PAP ACQ-FP4141-SV-2: Supervised Acquisition 4-1-4-1 for Enrolment without Fall-back Single Finger Acquisition
2	▶PAP ACQ-FI-SV-4: Supervised Facial Image Acquisition
3	(▶PAP DEL-FI-SV-1: Supervised Facial Image Digital Delivery)

Table 2.8 Required Partial Application Processes Application Profile Arrival Attention Document

3 Partial Application Processes

The Partial Application Processes (PAPs) specified by the following sections provide process specifications of basic biometric processes, e.g. the acquisition, identification or verification of biometrics or the evaluation processes for verification and identification. The PAPs are referenced by the relevant Application Profiles and are part of the overall processes specified therein.

A PAP MAY also be a task. A task is a process which functions as a generic reusable building block which is used by another PAP and is not referenced by an Application Profile directly.

The specific Function Modules that SHALL be implemented in the processes of this chapter are specified by the relevant Application Profiles.

3.1 PAP ACQ-FI-SV-4: Supervised Facial Image Acquisition

3.1.1 Process

The facial image acquisition process, refer to ▶Figure 3.1, described by this section requires a supervised situation. Note, that the ▶PAP Task ACQ-FI-1: Capture Live Facial Image is used here. The biometric subject's facial image is captured using live enrolment equipment (including a digital camera within a photo studio setup) operated by an operator¹.

In case the acquisition system detects a face, the facial image capture SHALL be performed automatically. An alternative automatic mode is the automatic facial image capture after a fixed time interval. However, the operator SHALL also have the option to perform the capture manually. For that the automatic capture, which is performed when a face is detected or after a fixed time interval, is disabled. An immediately performed cropping and de-rotation of the face and software quality assessment for the captured facial image ensures its biometric usability. If the quality assessment succeeds positively, the image SHALL be shown to the operator. If the quality is assessed as insufficient and the timeout has not exceeded yet, the system SHALL recapture. If the operator has captured manually, the image SHALL be shown to the operator in any case. In case the timeout has exceeded, the system SHALL identify the best captured facial image and show this image to the operator. The operator SHALL have the option to correct the cropping and de-rotation on the shown image manually. The operator SHALL also have the option to accept the captured facial image. The image is then release to the calling application. This is also the case, if the quality has been assessed as insufficient by the system. In the negative case, the facial image SHALL be discarded, the timeout is reset and a recapture is performed.

If the timeout exceeds and no facial image has been captured (neither with sufficient nor with insufficient quality), the process terminates without releasing an image. It is the operator's decision to restart the acquisition process or to perform other actions.

The process SHALL be supervised by an operator.

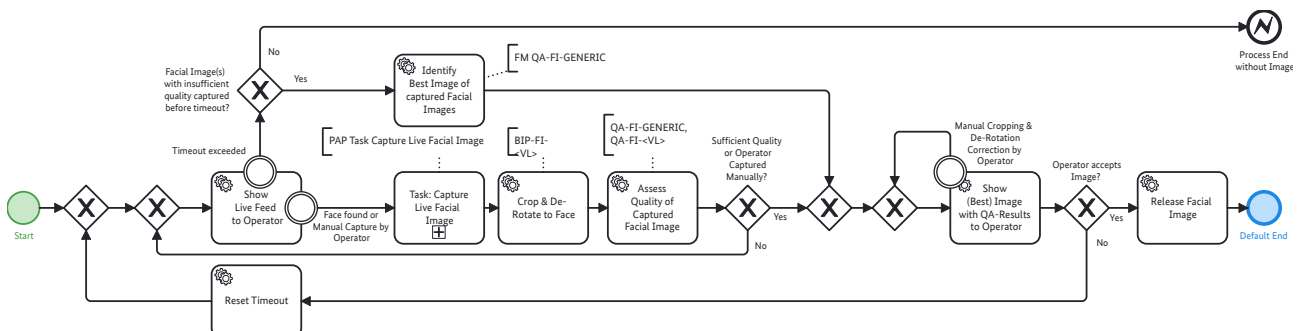


Figure 3.1. Partial Application Process "Supervised Facial Image Acquisition"

3.1.1.1 Interface Requirements

If High Level Biometric Services (HLBS) is used by the system, the "Service Definition Basic Facial Image Acquisition System" of Part 2, Volume 2 of this Technical Guideline SHALL be implemented.

¹ See ISO/IEC 19794-5, Annex B for "Best practices for Face Images"

3.1.2 PAP Task ACQ-FI-1: Capture Live Facial Image

►Figure 3.2 depicts the basic process of a live facial image capture. If the image acquisition is not supervised Presentation Attack Detection (PAD) SHALL be performed². In case of supervised image acquisition PAD is OPTIONAL.

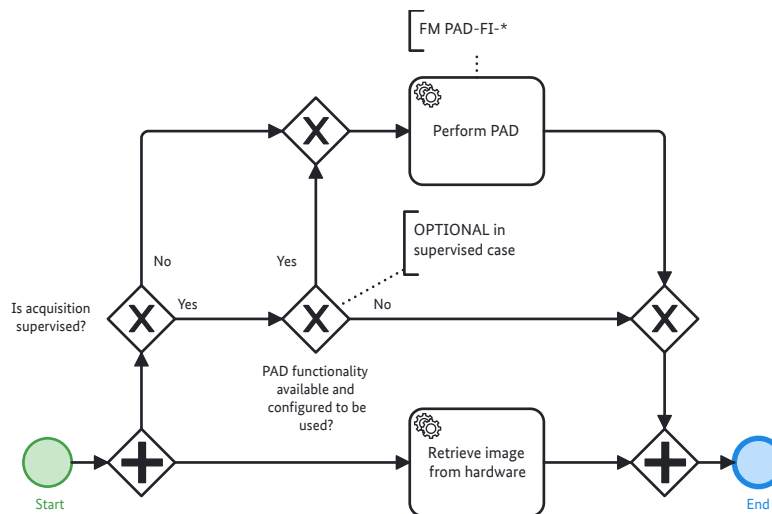


Figure 3.2. Partial Application Process Task "Capture Live Facial Image"

3.2 PAP DEL-FI-SV-1: Supervised Facial Image Digital Delivery

3.2.1 Process

The facial image delivery process, refer to ►Figure 3.3, described by this section requires a supervised situation performed by an operator³.

After loading the captured facial image(s) into the operators application, an immediately performed cropping and de-rotation of the face and software quality assessment for the captured facial image(s) ensures its biometric usability. Following a quality assessment the image(s) SHALL be shown to the operator. The system MAY identify the best captured facial image, show this image to the operator and preselect it. The operator SHALL have the option to correct the cropping and de-rotation on the shown image(s) manually. The operator SHALL also have the option to accept one of the captured facial image(s). The image is then released to the calling application. This is also the case, if the quality has been assessed as insufficient by the system.

In the case that the operator rejects the image(s) the process terminates without releasing an image. This is also the case, if the quality has been assessed as sufficient by the system.

Note, the facial image(s) captured SHALL be handled, transported and loaded into the operators application by the operators only. The biometric subject MUST NOT gain access to the facial image(s) at any time during this process.

² Note that the requirement for PAD in supervised settings might be subject to transitional arrangements. The final obligation is regulated through the selection of mandatory Function Modules within the respective Application Profiles.

³ See ISO/IEC 19794-5, Annex B for "Best practices for Face Images"

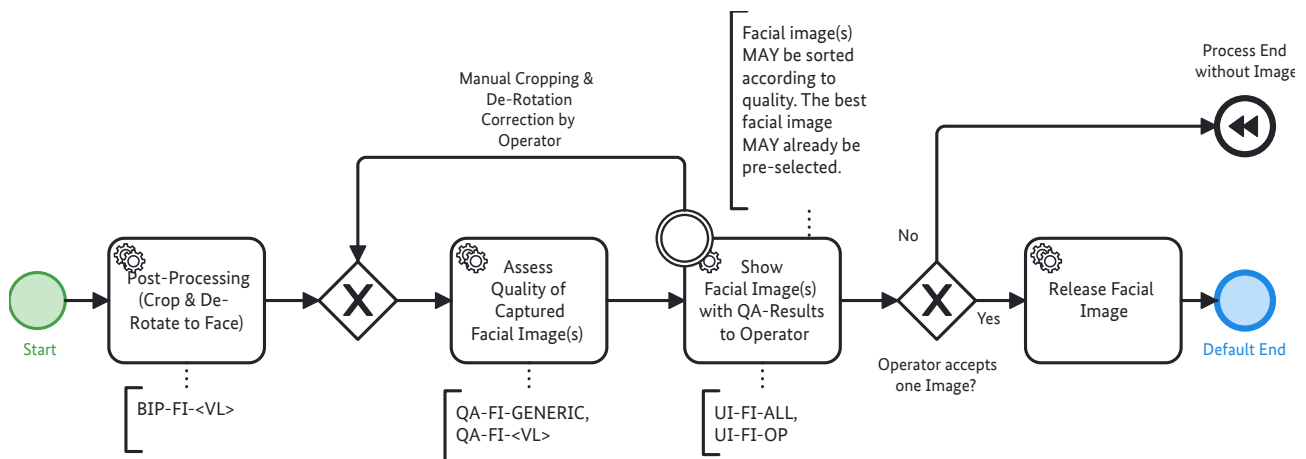


Figure 3.3. Partial Application Process "Supervised Facial Image Digital Delivery"

3.2.1.1 Interface Requirements

If HLBS is used by the system, the "Service Definition Facial Image Delivery System" of Part 2, Volume 2 of this Technical Guideline SHALL be implemented.

3.3 PAP ACQ-FP442-SV-2: Supervised Acquisition 4-4-2 for Enrolment without Fall-back Single Finger Acquisition

The capture process for the 4-4-2 enrolment scenario is shown in ►Figure 3.4. Single finger acquisition as fall-back is not allowed in this process. Note, that the ►PAP Task ACQ-FPS-SV-2: Capture Slap Supervised without Fall-back Single Finger Acquisition is used here. The 4-4-2 sequences are described in detail subsequently:

1. acquire right slap: index finger, middle finger, ring finger, little finger
2. acquire left slap: index finger, middle finger, ring finger, little finger
3. thumbs of both hands (simultaneously)

The process SHALL be supervised by an operator.

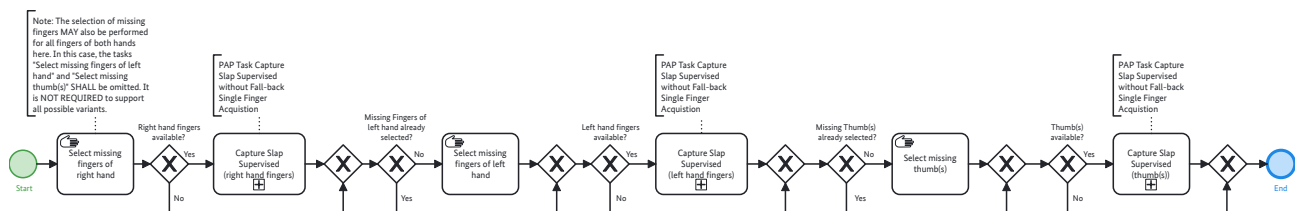


Figure 3.4. Partial Application Process "Supervised Acquisition 4-4-2 for Enrolment without Fall-back Single Finger Acquisition"

3.3.1 Interface Requirements

If HLBS is used by the system, the "Service Definition Fingerprint Acquisition System" of Part 2, Volume 2 of this Technical Guideline SHALL be implemented.

3.3.2 PAP Task ACQ-FPS-SV-2: Capture Slap Supervised without Fall-back Single Finger Acquisition

►Figure 3.5 depicts the basic process for a plain supervised slap capture. A plain slap capture can be part of more complex acquisition processes, e.g. a ten finger acquisition by the 4-1-4-1 capture sequence. The plain slap capture is subsequently described in detail. The QA is conducted according to the requirements of the applicable ►FM Category Quality Assessment.

1. The counter variable for the number of attempts for capturing the current slap SHALL be initialized as $i = 1$.

2. The slap image SHALL be retrieved from hardware. While the image is retrieved from hardware, PAD SHALL be performed. Note: The operator SHALL have the option to manually conduct the capture of slap(s).
3. The fingerprints SHALL be segmented and each SHALL be quality assessed.
 - a. In case the quality of the fingerprints meets the quality requirements defined in the corresponding QA FM, the captured slap and the set of segmented fingerprints and parameter data (e.g. quality values) SHALL be temporarily stored.
 - b. In case the quality requirements for one or more fingerprints of the slap are not met, the capture SHALL be repeated up to two times (i.e. the acquisition of a single slap consists of a maximum of three capture attempts). The counter SHALL be set to $i = i + 1$.
4. A uniqueness check SHALL be conducted for the captured slap image to detect the capture of wrong fingers, e.g. due to interchanged hands or multiple acquisition of the same hand or finger. Note, that it is RECOMMENDED to conduct the uniqueness check as early as possible after a fingerprint image is available.
 - a. In case
 - the comparison of any fingerprint of the current slap with any previously accepted fingerprint of a previous slap or
 - the comparison of a fingerprint of the current slap with another finger print of the current slap is successful, the uniqueness check SHALL show a warning.
 - b. In case the comparisons of all fingers of the current slap with all fingers of previous slaps are not successful, the uniqueness check SHALL report no error.
5. Generally, a slap classifier SHALL⁴ be used for the captured slap image to detect the capture of the wrong slap. It SHALL be configurable to switch the classifier off or in evaluation mode (logging of the result without showing the result/error to the operator). Note, that the slap classifier is only required for 4 finger slaps. Other acquisitions currently do not require the corresponding FM.
 - a. If the result of the classification concludes that the acquired slap mismatches the expected slap, an error SHALL be reported.
 - b. If the result of the classification concludes that the acquired slap matches the expected slap, no error SHALL be reported.

If the quality check of the third capture attempt fails (counter i is set to 3), the best of the captured slaps SHALL be identified according to the corresponding QA Function Module and temporarily stored along with corresponding information.

The process SHALL be supervised by an operator.

At the end of the process the operator decides on one of the three options:

1. Use the acquired slap.
2. Recapture the current slap. The counter will be reset to $i = 1$.
3. Restart the total slap acquisition workflow.

⁴ For Volume ARE, this is only RECOMMENDED.

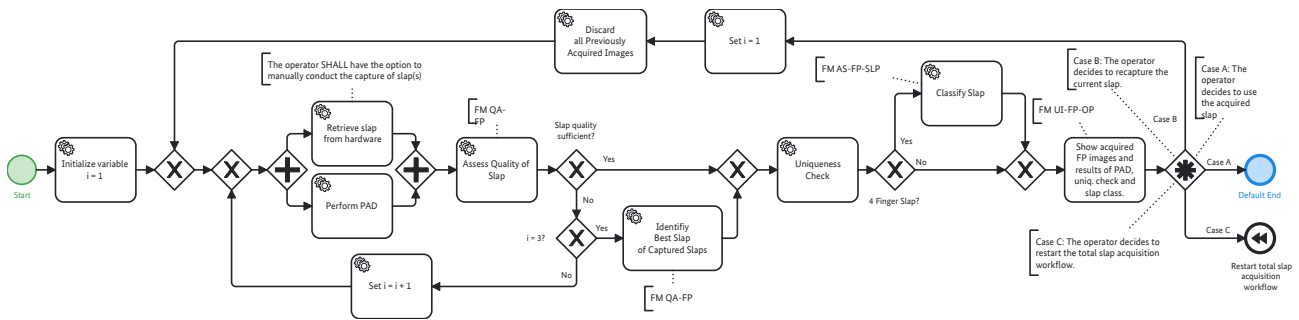


Figure 3.5. Partial Application Process Task "Capture Slap Supervised without Fall-back Single Finger Acquisition"

3.4 PAP ACQ-FP4141-SV-2: Supervised Acquisition 4-1-4-1 for Enrolment without Fall-back Single Finger Acquisition

►Figure 3.6 depicts the acquisition process for 4-1-4-1 the enrolment scenarios. Note, that the ►PAP Task ACQ-FPS-SV-2: Capture Slap Supervised without Fall-back Single Finger Acquisition is used here. The 4-1-4-1 sequence is described in detail subsequently:

1. capture right hand: index finger, middle finger, ring finger, little finger
2. capture right hand: thumb
3. capture left hand: index finger, middle finger, ring finger, little finger
4. capture left hand: thumb

The process SHALL be supervised by an operator.

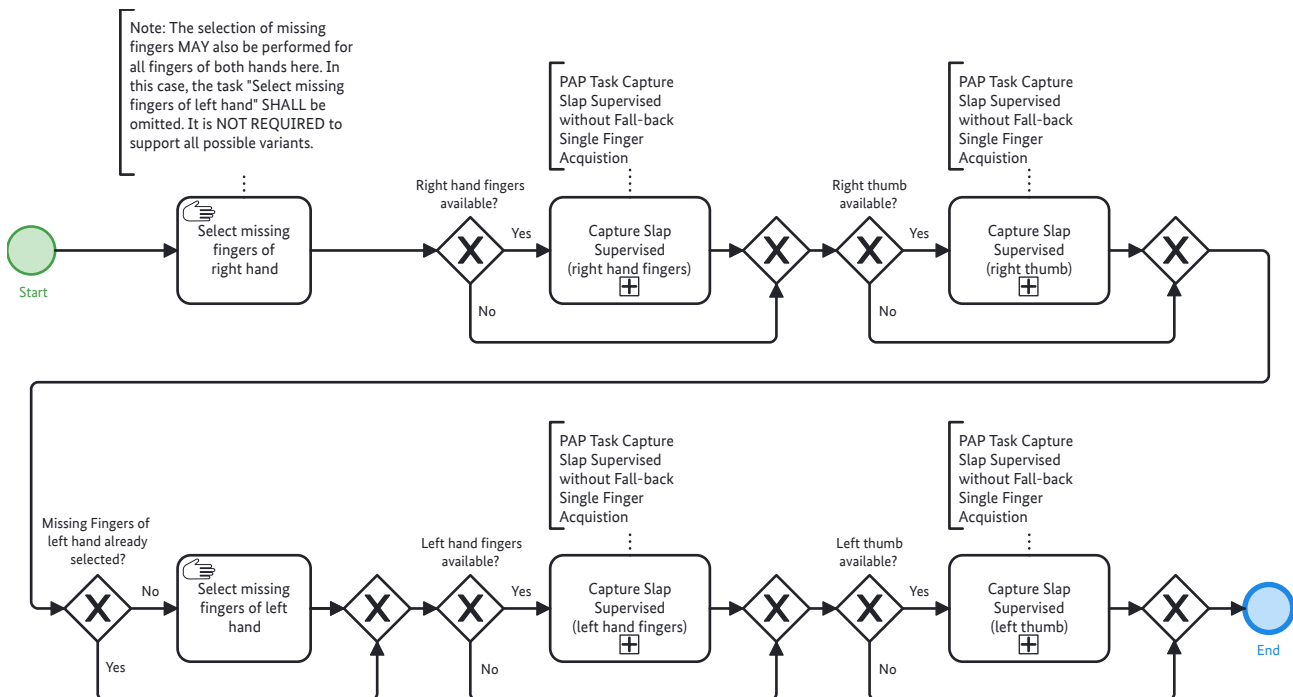


Figure 3.6. Partial Application Process "Supervised Acquisition 4-1-4-1 for Enrolment without Fall-back Single Finger Acquisition"

3.4.1 Interface Requirements

If HLBS is used by the system, the "Service Definition Fingerprint Acquisition System" of Part 2, Volume 2 of this Technical Guideline SHALL be implemented.

3.4.2 PAP Task ACQ-FPS-SV-2: Capture Slap Supervised without Fall-back Single Finger Acquisition

►Figure 3.7 depicts the basic process for a plain supervised slap capture. A plain slap capture can be part of more complex acquisition processes, e.g. a ten finger acquisition by the 4-1-4-1 capture sequence. The plain slap capture is subsequently described in detail. The QA is conducted according to the requirements of the applicable ►FM Category Quality Assessment.

1. The counter variable for the number of attempts for capturing the current slap SHALL be initialized as $i = 1$.
2. The slap image SHALL be retrieved from hardware. While the image is retrieved from hardware, PAD SHALL be performed. Note: The operator SHALL have the option to manually conduct the capture of slap(s).
3. The fingerprints SHALL be segmented and each SHALL be quality assessed.
 - a. In case the quality of the fingerprints meets the quality requirements defined in the corresponding QA FM, the captured slap and the set of segmented fingerprints and parameter data (e.g. quality values) SHALL be temporarily stored.
 - b. In case the quality requirements for one or more fingerprints of the slap are not met, the capture SHALL be repeated up to two times (i.e. the acquisition of a single slap consists of a maximum of three capture attempts). The counter SHALL be set to $i = i + 1$.
4. A uniqueness check SHALL be conducted for the captured slap image to detect the capture of wrong fingers, e.g. due to interchanged hands or multiple acquisition of the same hand or finger. Note, that it is RECOMMENDED to conduct the uniqueness check as early as possible after a fingerprint image is available.
 - a. In case
 - the comparison of any fingerprint of the current slap with any previously accepted fingerprint of a previous slap or
 - the comparison of a fingerprint of the current slap with another finger print of the current slap
 is successful, the uniqueness check SHALL show a warning.
 - b. In case the comparisons of all fingers of the current slap with all fingers of previous slaps are not successful, the uniqueness check SHALL report no error.
5. Generally, a slap classifier SHALL⁵ be used for the captured slap image to detect the capture of the wrong slap. It SHALL be configurable to switch the classifier off or in evaluation mode (logging of the result without showing the result/error to the operator). Note, that the slap classifier is only required for 4 finger slaps. Other acquisitions currently do not require the corresponding FM.
 - a. If the result of the classification concludes that the acquired slap mismatches the expected slap, an error SHALL be reported.
 - b. If the result of the classification concludes that the acquired slap matches the expected slap, no error SHALL be reported.

If the quality check of the third capture attempt fails (counter i is set to 3), the best of the captured slaps SHALL be identified according to the corresponding QA Function Module and temporarily stored along with corresponding information.

The process SHALL be supervised by an operator.

At the end of the process the operator decides on one of the three options:

1. Use the acquired slap.
2. Recapture the current slap. The counter will be reset to $i = 1$.
3. Restart the total slap acquisition workflow.

⁵ For Volume ARE, this is only RECOMMENDED.

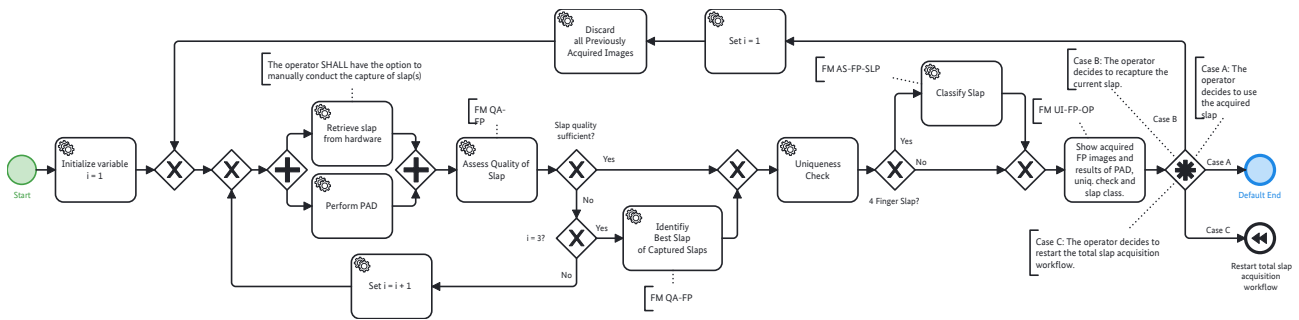


Figure 3.7. Partial Application Process Task "Capture Slap Supervised without Fall-back Single Finger Acquisition"

3.5 PAP ACQ-FP10R-SV-1: Ten Finger Rolled Supervised Acquisition for Enrolment

►Figure 3.8 depicts the acquisition process for ten rolled fingers. Note, that the ►PAP Task ACQ-FPR-1: Capture Rolled Fingerprint is used here. The sequence is described in detail subsequently:

1. The permanently and temporarily missing fingers are selected.
2. Each available finger is captured according to "Capture Rolled Fingerprint" process. In case the finger to be captured is permanently or temporarily missing (e.g. due to injury) or unable to be captured, the current capture is skipped.
3. If a total restart of fingerprint acquisition workflow is requested during "Capture Rolled Fingerprint" the current acquisition process terminates without any records to use.

When all available fingers have been captured, the process finishes.

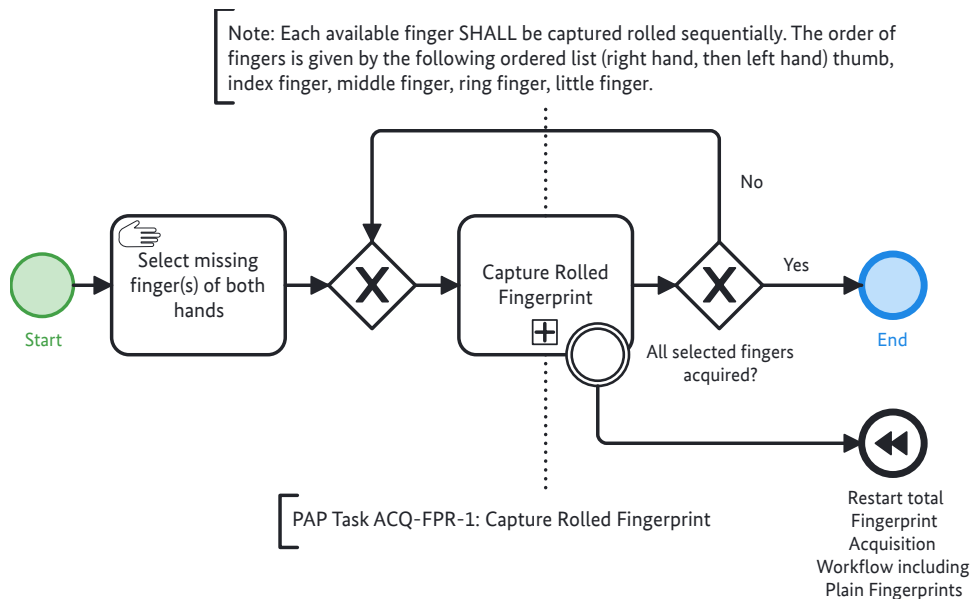


Figure 3.8. Partial Application Process "Ten Finger Rolled Supervised Acquisition for Enrolment"

3.5.1 Interface Requirements

If HLBS is used by the system, the "Service Definition Rolled Fingerprint Acquisition System" of Part 2, Volume 2 of this Technical Guideline SHALL be implemented.

3.5.2 PAP Task ACQ-FPR-1: Capture Rolled Fingerprint

►Figure 3.9 defines the basic sequence for a rolled fingerprint capture. The basic sequence for a rolled fingerprint capture can be part of more complex acquisition processes, e.g. a ten finger rolled acquisition. The basic sequence for a rolled fingerprint capture is described in detail subsequently. The QA is conducted according to the requirements of the applicable ►Section 4.4.

1. The counter variable for the number of attempts for capturing is initialized as $i = 1$.
2. The finger SHALL be placed on the fingerprint sensor with the guidance of the operator.
3. The rolled fingerprint images is retrieved from the acquisition hardware.
4. If the hardware reports an issue of the rolling process, the capture SHALL be repeated if $i < 3$. i is increased by 1.
5. If no hardware reported issue was found, QA SHALL ensure proper quality of the captured fingerprint. Note, that the quality value of each capture attempt SHALL be logged according to ▶Section 4.11.4.
 - a. In case the quality of the fingerprint meets the quality requirements defined in the corresponding QA Function Module, the captured fingerprint and parameter data (e.g. quality values) are temporarily stored and the capture of the current finger finishes.
 - b. In case the quality requirements of the rolled fingerprint is not met, the capture SHALL be repeated if $i < 3$. i is increased by 1.
6. A uniqueness check SHALL be conducted for the captured fingerprint image to detect the capture of wrong fingers, e.g. due to interchanged hands or multiple acquisition of the same hand or finger. Note: It is RECOMMENDED to conduct the uniqueness check as early as possible after a fingerprint image is available.
 - a. In case the comparison of the current fingerprint with any previously captured fingerprint is successful, the uniqueness check SHALL report an alert.
 - b. In case the comparison of the current fingerprint with any previously captured fingerprint is not successful, the uniqueness check SHALL NOT report an alert.
7. A control verification SHALL be conducted for each captured rolled image. Therefore, plain control slaps have to be captured in a workflow upfront. Note, it is RECOMMENDED to conduct the control verification as early as possible after a fingerprint image is available.
 - a. In case the comparison of the rolled finger and its corresponding plain finger is successful, the control verification is considered successful.
 - b. In case the comparison of the rolled finger and its plain finger is not successful and the rolled finger is successfully compared with any other plain finger, the control verification is considered not successful.
 - c. In case no successful comparison of the rolled finger and any plain finger occurs, the control verification is considered undetermined.
8. If the capture was successful (no hardware reported issues, sufficient quality, successful uniqueness check and control verification) the operator SHALL have the option to accept the capture attempt or to reject the capture attempt (veto NOK). If the capture was not successful the capture SHALL be repeated up to two times. If there is still no successful capture attempt after three tries the best capture attempt SHALL be identified. The best capture attempt SHALL then be presented to the operator. The operator SHALL have the option to accept this capture attempt (veto OK) or to reject the capture. If the operator rejects a capture attempt the operator SHALL have the option to only re-capture the current rolled fingerprint (discard all previous captured rolled fingerprints of the current finger and reset the counter $i = 1$) or to restart the total fingerprint acquisition including the plain fingerprints.

If the quality check of the third capture attempt fails or the hardware reported an issue of the rolling process, the best of the previously captured images is identified according to the corresponding QA Function Module and temporarily stored along with corresponding information. Note, that the quality value of each capture attempt SHALL be logged according to ▶Section 4.11.4.

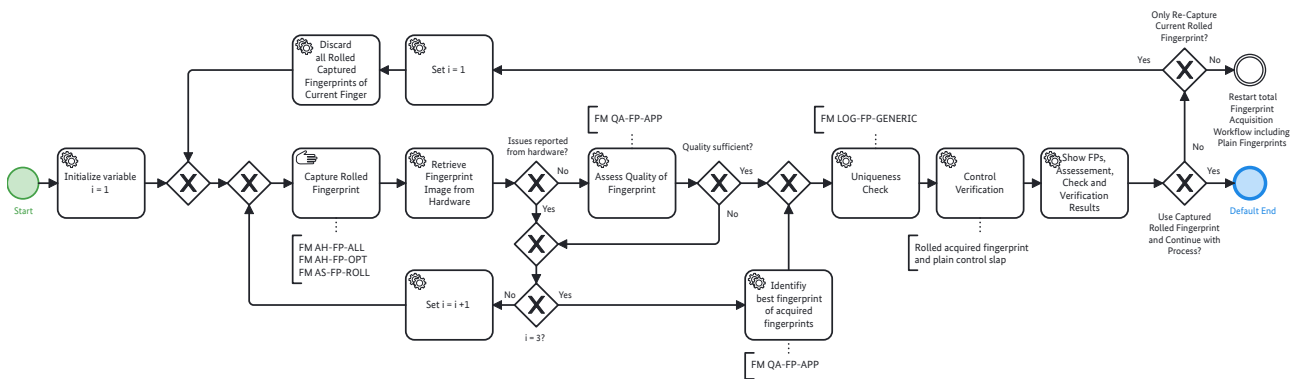


Figure 3.9. Partial Application Process Task "Capture Rolled Finger"

4 Function Modules

This chapter lists all Function Modules for the defined Application Profiles.

4.1 FM Category Acquisition Hardware

Devices that are used for digitising physical, representable biometric characteristics are called Acquisition Hardware (AH). Digital cameras to capture images of the face, fingerprint sensors, or signature tablets can be named as examples.

4.1.1 FM AH-FI-DC

This Function Module describes the requirements for facial image cameras and physical setups that are used to obtain facial images.

4.1.1.1 Requirements

- The camera SHALL be able to capture a full frontal facial image of the person if the person is looking straight to the camera. The minimum physical resolution of the camera SHALL allow a cropping of the captured facial image to 1200 x 1600 pixels without any upscaling. Note, this requirement is OPTIONAL for scenarios where only a facial verification is performed.
- Adequate image quality to meet the requirements of [BIB_ISO_19794_FACE]¹ SHALL be provided.
- The physical and environmental conditions for capturing facial images, such as the positioning of the camera, proper lighting of the face and a uniform background as described in [BIB_ISO_19794_FACE] and [BIB_ICAO_TR_Portrait_Quality] SHALL be complied with. It is RECOMMENDED to use a uniform background in grey (i.e. R=G=B) between #A1A1A1 and #E1E1E1.
- The camera system SHALL be able to capture images in colour (24 bit sRGB). Note, this requirement is OPTIONAL for scenarios where only a facial verification is performed.
- The requirements for focal length (depending on the size of the camera sensor) as described in [BIB_ICAO_TR_Portrait_Quality] (chapters 5.2.1 and 5.2.2) SHALL be complied with. Wide-angle settings MUST NOT be used.

4.1.2 FM AH-FI-SSS2

This Function Module describes the requirements for self-service systems scenarios where a digitised facial image is obtained. Note, the distance between camera system and biometric subject is defined as the geometrical optical-path length between the forehead of the biometric subject and the active camera system's optic. The optical-path MAY, for example, follow a straight line from forehead to optic, or be rerouted by using mirrors so that the biometric subject can stand closer to the device.

4.1.2.1 Requirements

- The system MAY measure the distance between the biometric subject and the camera system by hardware means.
- The system SHALL allow to capture facial images of biometric subjects either in standing position or in sitting position. A change of position SHALL NOT be required.
- The camera system SHALL NOT require the biometric subject to rotate its standing or sitting position while interacting with the graphical user interface in order to look straight to the camera system.
- The camera system SHALL at least allow to acquire facial images compliant to this Technical Guideline of biometric subjects which have a body height in the range of 140 cm to 200 cm.
- The camera system SHALL at least capture sharp full frontal images of the biometric subject which stand or sit upright in a range from at least 70 cm up to 100 cm in front of the camera system and look frontal

¹ The ISO/IEC 39794 series might be relevant here.

whereas the following conditions SHALL be met. In case the manufacturer can provide a greater range than 100 cm, this SHALL be documented. However, distances below 70 cm SHALL be avoided.

- The minimum physical resolution of the camera SHALL allow a cropping of the facial image to 1244 x 1600 pixels without any upscaling.
- The camera system SHALL be able to capture images in colour (24 bit sRGB).
- The camera installation SHALL be able to capture an image according to the definition of "full frontal" (see [BIB_ISO_19794_FACE]) on a hardware level. Especially an image capturing at "Frankfurt Horizon" SHALL be possible for all biometric subjects within the defined range of body height. The "Frankfurt Horizon" is a plane which is uniquely defined for each biometric subject by the following three points: the inferior margin of the left orbit and the superior margin of each ear canal.

4.1.3 FM AH-FI-ICS2

This Function Module describes the requirements for integrated camera systems that are used to obtain digitised facial images.

4.1.3.1 Requirements

- The camera SHALL be able to capture a frontal image of the person if the biometric subject is standing or sitting upright in front of the camera system and is looking straight into the camera.
- The camera system SHALL at least allow to acquire facial images compliant to this Technical Guideline of biometric subjects which have a body height in the range of 140 cm to 200 cm.
- The camera system SHALL use diffuse lighting which SHALL adapt to the environmental light conditions for a uniform illumination of the biometric subject's face to ensure the capture of a well-exposed facial image; mirroring effects of glasses SHALL be avoided.
- The camera system MAY provide a feedback screen for displaying the live camera image (digital mirror). If the camera system provides a feedback screen, the following requirements SHALL be taken into account:
 - If the biometric subject is looking straight to the feedback screen the viewing direction of the person SHALL be frontal.
 - The feedback SHALL include guidance to help the biometric subject for correct positioning in front of the camera.
- The system SHALL allow high quality acquisitions independently from the environmental light situation, provided that the system is set up in an environment that can usually be found in agencies and that offers normal lighting conditions (no direct light from windows etc.).
- The requirements for focal length (depending on the size of the camera sensor) as described in [BIB_I-CAO_TR_Portrait_Quality] (chapters 5.2.1 and 5.2.2) SHALL be complied with. Wide-angle settings MUST NOT be used.
- The camera system SHALL guarantee the sharpness of the captured image within the designated capture area.
- The camera system SHALL minimise the distortion of the captured face within the whole capture area.
- The minimum physical resolution of the camera SHALL allow a cropping of the facial image to 1244 x 1600 pixels without any upscaling.
- The camera system SHALL be able to capture images in colour (24 bit sRGB).
- Regarding background for capturing facial images exactly one out of two options SHALL be selected:
 - A uniform background for capturing facial images as described in [BIB_ISO_19794_FACE] and [BIB_I-CAO_TR_Portrait_Quality] SHALL be selected. It is RECOMMENDED to use a uniform background in grey (i.e. R=G=B) between #A1A1A1 and #E1E1E1.
 - Otherwise, when a physical uniform background is not in use, the background of the captured facial image SHALL be replaced in accordance with ▶Section 4.2.2.

4.1.4 FM AH-FP-ALL

This Function Module describes requirements for high quality fingerprint scanners (single finger and multi finger). In this set of requirements, one of the following certification SHALL be used:

- FBI/CJIS Image Quality Specifications from Electronic Biometric Transmission Specification (EBTS) Appendix F [BIB_EBTS/F]
- FBI/CJIS Biometric Specifications, Personal Identity Verification (PIV) Image Quality Specification for Single Finger Capture Devices [BIB_PIV]

Note, that the FBI certification allows for multiple types of fingerprint scanners e.g. capacitive and optical fingerprint scanners. However, contactless fingerprint scanners SHALL NOT be used.

4.1.4.1 Requirements

For the acquisition of the fingerprints, only devices are permitted which meet the following requirements (in analogy to [BIB_EBTS/F] and [BIB_PIV]).

- Multi fingerprint scanners SHALL be certified according to [BIB_EBTS/F] and the respective certificate SHALL be at hand.
- Single fingerprint scanners SHALL be certified according to [BIB_EBTS/F] or [BIB_PIV] and the respective certificate SHALL be at hand.
- For single fingerprint scanners, a capturing area of at minimum 16 mm width and 20 mm height is REQUIRED (deviating from table F 1 in [BIB_EBTS/F]).
- The certificate according to [BIB_EBTS/F] or [BIB_PIV] SHOULD NOT be older than 5 years in order to ensure proper actuality. The certificate SHALL NOT be older than a maximum of 10 years.

4.1.5 FM AH-FP-OPT

This Function Module describes the requirements for optical high quality fingerprint scanners (single finger and multi finger).

4.1.5.1 Requirements

- For the acquisition of the fingerprints, optical sensors using the principal of frustrated total reflection or direct contact (the imaging system is the sensor surface, typically separated by a transparent protection layer) according to the certification requirements of [BIB_ISO_19794_FINGER]² (especially this means a resolution of 500 ppi or 1000 ppi) SHALL be used exclusively.
- For the acquisition of the fingerprints, only devices are permitted which meet the following requirements (in analogy to [BIB_EBTS/F]). Notwithstanding, a capturing area of at minimum 16 mm width and 20 mm height is REQUIRED (deviating from table F 1 in [BIB_EBTS/F]) for single finger scanners.

4.1.5.1.1 Grey Scale Linearity

When measuring a stepped series of uniform target reflectance patches ("step tablet") that substantially covers the scanner's grey range, the average value of each patch SHALL be within 7.65 grey levels of a linear, least squares regression line fitted between target reflectance patch values (independent variable) and scanner output grey levels of 8 bit resolution (dependent variable).

4.1.5.1.2 Resolution and Geometrical Accuracy

Resolution: The scanner's final output fingerprint image SHALL have a resolution, in both sensor detector row and column directions, in the range: $(R - 0.01R)$ to $(R + 0.01R)$. The magnitude of R is either 500 ppi or 1000 ppi; a scanner MAY be certified at either one or both of these resolution levels. The scanner's true optical resolution SHALL be greater than or equal to R .

Across-Bar geometric accuracy: When scanning a 1.0 cy/mm, multiple parallel bar target, in both vertical bar and horizontal bar orientations, the absolute value of the difference (D) between the actual distance across parallel target bars (X), and the corresponding distance measured in the image (Y) SHALL NOT exceed the

² The ISO/IEC 39794 series might be relevant here.

following values for at least 99 % of the tested cases in each print block measurement area and in each of the two directions:

- for 500 ppi scanners:

$$D \leq 0.0007, \text{ for } 0.00 < X \leq 0.07 \text{ and}$$

$$D \leq 0.01X, \text{ for } 0.07 \leq X \leq 1.50$$

- for 1000 ppi scanners:

$$D \leq 0.0005, \text{ for } 0.00 < X \leq 0.07 \text{ and}$$

$$D \leq 0.0071X, \text{ for } 0.07 \leq X \leq 1.50$$

where $D = |Y - X|$, X = actual target distance, Y = measured image distance (D , X , Y are in inches).

Along-Bar geometric accuracy: When scanning a 1.0 cy/mm, multiple parallel bar target, in both vertical bar and horizontal bar orientations, the maximum difference in the horizontal or vertical direction, respectively, between the locations of any two points within a 1.5 inch segment of a given bar image, SHALL be less than 0.016 inches for at least 99 % of the tested cases in each print block measurement area and in each of the two orthogonal directions.

4.1.5.1.3 Contrast Transfer Function

The spatial frequency response SHALL be measured using a binary grid target (Ronchi-Grating), denoted as contrast transfer function (CTF) measurement. When measuring the bar CTF, it SHALL meet or exceed the minimum modulation values defined by equation ▶Equation 4.1 or equation ▶Equation 4.2, in both the detector's row and detector's column directions, and over any region of the scanner's field of view. CTF values computed from equations ▶Equation 4.1 and ▶Equation 4.2 for nominal test frequencies are given in the following table. None of the CTF modulation values measured at specification spatial frequencies SHALL exceed 1.05. The output bar target image SHALL NOT exhibit any significant amount of aliasing. It is NOT REQUIRED that the bar target contains the exact frequencies listed in ▶Table 4.1, however, the target does need to cover the listed frequency range and contain bar patterns close to each of the listed frequencies.

The following equations are used to obtain the minimum acceptable CTF modulation values when using bar targets that contain frequencies not listed in ▶Table 4.1:

- 500 ppi scanner, for $f = 1.0$ to 10.0 cy/mm:

$$CTF = 3.04105 \cdot 10^{-4} \cdot f^2 - 7.99095 \cdot 10^{-2} \cdot f + 1.02774 \quad (4.1)$$

- 1000 ppi scanner, for $f = 1.0$ to 20.0 cy/mm:

$$CTF = -1.85487 \cdot 10^{-5} \cdot f^3 + 1.41666 \cdot 10^{-3} \cdot f^2 - 5.73701 \cdot 10^{-2} \cdot f + 1.01341 \quad (4.2)$$

For a given bar target, the specification frequencies include all of the bar frequencies which that target has in the range 1 to 10 cy/mm (500 ppi scanner) or 1 to 20 cy/mm (1000 ppi scanner).

Frequency [cy/mm]	Minimum Modulation for 500 ppi scanners	Minimum Modulation for 1000 ppi scanners	Maximum Modulation
1.0	0.948	0.957	1.05
2.0	0.869	0.904	1.05
3.0	0.791	0.854	1.05
4.0	0.713	0.805	1.05
5.0	0.636	0.760	1.05
6.0	0.559	0.716	1.05
7.0	0.483	0.675	1.05
8.0	0.408	0.636	1.05
9.0	0.333	0.598	1.05
10.0	0.259	0.563	1.05

Frequency [cy/mm]	Minimum Modulation for 500 ppi scanners	Minimum Modulation for 1000 ppi scanners	Maximum Modulation
12.0	---	0.497	1.05
14.0	---	0.437	1.05
16.0	---	0.382	1.05
18.0	---	0.332	1.05
20.0	---	0.284	1.05

Table 4.1 Minimum and Maximum Modulation

4.1.5.1.4 Signal-to-Noise Ratio and the Grey-Level Uniformity

The white signal-to-noise ratio (SNR) and black SNR SHALL each be greater than or equal to 125.0, in at least 97 % of respective cases, within each measurement area.

The grey level uniformity is defined for the three following cases:

- Adjacent row, column uniformity: At least 99 % of the average grey levels between every two adjacent quarter-inch long rows and 99 % between every two adjacent quarter-inch long columns, within each imaged area, SHALL NOT differ by more than 1.0 grey levels when scanning a uniform low reflectance target, and SHALL NOT differ by more than 2.0 grey levels when scanning a uniform high reflectance target.
- Pixel to pixel uniformity: For at least 99.9 % of all pixels within every independent 0.25 inch by 0.25 inch area located within each imaged area, individual pixel's grey level SHALL NOT vary from the average by more than 22.0 grey levels, when scanning a uniform high reflectance target, and SHALL NOT vary from the average by more than 8.0 grey levels, when scanning a uniform low reflectance target.
- Small area uniformity: For every two independent 0.25 inch by 0.25 inch areas located within each imaged area, the average grey levels of the two areas SHALL NOT differ by more than 12.0 grey levels when scanning a uniform high reflectance target, and SHALL NOT differ by more than 3.0 grey levels when scanning a uniform low reflectance target.

4.1.5.1.5 Grey Scale Range of Fingerprint Images

A fingerprint scanner operating at 500 ppi or 1000 ppi, SHALL perform the following sets of live scans:

- For a standard roll and plain finger live scanner: capture a complete set of fingerprints from each of 10 subjects; i.e. 10 rolls (all 5 fingers from each hand), 2 plain thumb impressions, and 2 plain 4-finger impressions.
- For a palm scanner component of a live scan system: capture left and right palms from each of 10 subjects.
- For an identification flat live scanner: capture left and right 4-finger plain impressions and dual thumb plain impressions from each of 10 subjects.

Within the histogram of each image all grey values with at least 5 Pixels in this image are counted. The histogram SHALL show no break and no other artefact. At least 80 % of the captured individual fingerprint images SHALL have a grey scale dynamic range of at least 200 grey levels, and at least 99% SHALL have a dynamic range of at least 128 grey levels.

4.2 FM Category Acquisition Software

The Function Module category Acquisition Software (AS) contains all functionality regarding image processing for biometric purposes. Therefore, these Function Modules usually contains device driver software for the acquisition hardware or, in general, software that is very close to the physical hardware such as firmware. Furthermore, colour management and image enhancement mechanisms are part of this software layer.

4.2.1 FM AS-FI-DC

This Function Module describes the requirements and interfaces for acquisition software used for facial image cameras in order to obtain digitised images.

4.2.1.1 Requirements

- In regard to the application scenario an adequate resolution of the camera SHALL be chosen to acquire a facial image of at least 1200 x 1600 pixels with an inter eye distance of at least 120 pixels.
- The images SHALL be captured and stored in colour (24 bit sRGB). Note, this requirement is OPTIONAL for scenarios where only a facial verification is performed.
- In normal mode of operation, no compression artefacts SHALL be detectable in the image.

4.2.1.2 Recommendations

- The image data SHOULD be provided without any compression or with lossless compression. If the acquisition device does not support a lossless mode, the image MAY alternatively be provided with the minimal level of compression possible.
- Acquisition software that supports calibration procedures for the respective digital camera SHOULD be used (in particular colour management).

4.2.2 FM AS-FI-ICS2

This Function Module describes the requirements and interfaces for acquisition software used for integrated camera systems in order to obtain digitised facial images.

4.2.2.1 Requirements

- The acquisition software of the camera system SHALL provide uncompressed image data for further processing.
- The selected resolution within the camera settings (e.g. configurable via camera firmware) SHALL be at least 1244 x 1600 pixels. Note, this requirement is OPTIONAL for scenarios where only a facial verification is performed.
- The capture of images in colour (24 bit sRGB) SHALL be selected.
- In normal mode of operation, no compression artefacts SHALL be detectable in the image.
- Regarding background for capturing facial images exactly one out of two options SHALL be selected:
 - A uniform background for capturing facial images as described in [BIB_ISO_19794_FACE] and [BIB_I-CAO_TR_Portrait_Quality] SHALL be selected. It is RECOMMENDED to use a uniform background in grey (i.e. R=G=B) between #A1A1A1 and #E1E1E1.
 - Otherwise, when a physical uniform background is not in use, the background of the captured facial image SHALL be replaced by a background according to the following parameters:
 - The colour of the uniform background SHALL be a grey (i.e. R=G=B) between #A1A1A1 and #E1E1E1.
 - The image noise SHALL be medium noise, but not more than 0.5 / FF.

4.2.2.2 Recommendations

- The image data SHOULD be provided without any compression or with lossless compression. If the acquisition device does not support a lossless mode, the image MAY alternatively be provided with the minimal level of compression possible.
- Acquisition software that supports calibration procedures for the respective digital camera SHOULD be used (in particular colour management).

4.2.3 FM AS-FI-ICS3

This Function Module describes the requirements and interfaces for acquisition software used for integrated camera systems in order to obtain digitised facial images.

4.2.3.1 Requirements

- The acquisition software of the camera system SHALL detect whether multiple faces are presented to the camera system simultaneously in the capture area.
- The acquisition software of the camera system SHALL detect whether a face which is presented to the camera system completely leaves the capture area. The process SHALL then terminate after a configurable timeout.

4.2.4 FM AS-FP-MF

This Function Module describes the requirements and interfaces for acquisition software for multi finger scanners.

4.2.4.1 Requirements

- The image provided by acquisition software SHALL meet the criteria of fingerprints as described in [BIB_ISO_19794_FINGER]³. The requirements according to the certification requirements of [BIB_ISO_19794_FINGER] SHALL be met. In particular the resolution of the fingerprint scanner SHALL fulfill the requirements for acquisition setting levels 31 and 41 of [BIB_ISO_19794_FINGER].
- For the acquisition process, a pre-qualification of the fingerprints to prefer high quality SHALL be used. The activation of the acquisition SHALL occur automatically. The capture SHOULD prefer the highest quality image of a sequence.
- This functionality MAY be part of the hardware firmware and MAY NOT be available as separate software component.
- The thresholds of the pre-qualification for performing a capture SHALL be documented by the vendor.
- If the acquisition software allows multiple thresholds for pre-qualification, it SHALL be configurable by the system administrator.
- In case further requirements demand for an export of the uncompressed fingerprint image data BMP SHALL be used as image format.

4.2.4.2 Recommendations

In order to prevent unwanted duplicate acquisitions of the same fingers or slaps, the software SHOULD start the acquisition process not before the fingers from a previous acquisition have been removed from the sensor surface.

4.2.5 FM AS-FP-SLP

This Function Module describes the requirements and interfaces for acquisition software for four finger slap scanners running in slap acquisition mode.

4.2.5.1 Requirements

- It SHALL be classified by software whether the left or right hand slap has been acquired. Thumb slap classification is NOT REQUIRED. This MAY be achieved by using the acquired fingerprint images or with the help of further sensors or images (e.g. surveillance) if available. Direct hardware-based detection MAY also be used, as long as the results are logged.
- The classification SHALL have a performance of at least 99% i.e. 99% of all left hand slaps SHALL be correctly classified as left hand slaps and 99% of all right hand slaps SHALL be correctly classified as right hand slaps.
- In case the classification can return more than two possible results, e.g. "left", "right", or "unknown", a classification threshold SHALL be configurable.
- It SHALL be configurable to switch the classification off or to only use the classification result information for evaluation purposes.

³ The ISO/IEC 39794 series might be relevant here.

4.2.6 FM AS-FP-ROLL

This Function Module describes the requirements and interfaces for Acquisition Software for scanners supporting rolled fingerprint capture.

4.2.6.1 Requirements

The acquisition software SHALL support the acquisition of rolled fingerprints. Therefore, the following requirements apply:

1. The captured fingerprint image SHALL depict the fingerprint from nail to nail.
2. The captured fingerprint image SHALL depict a faithful reproduction of the fingerprint, especially in the areas where the rolled fingerprint overlaps with the corresponding plain print.
3. Uniform Depiction
 - a. The captured fingerprint image SHALL NOT depict visible distortion or interruptions.
 - b. The captured fingerprint image SHALL NOT depict puzzle effects such that parts of the fingerprint image are displaced from their actual position.
4. Clear Depiction
 - a. The captured fingerprint image SHALL clearly depict friction ridges and ridge pattern.
 - b. The captured fingerprint image SHALL NOT depict blurring and smearing. Blurring and also smearing SHALL be detected by the acquisition software. If any blurring or smearing is detected, a warning SHALL be shown to the operator. The acquisition software SHALL NOT perform any correction concerning the blurring and smearing.
 - c. If features exists for the given fingerprint:
 - i. The captured fingerprint image SHALL clearly depict features.
 - ii. If loop features exists for the given fingerprint: The captured fingerprint image SHALL clearly depict loop features (core and delta).
 - d. The captured fingerprint image SHALL clearly depict existing features at the border zone of the image.
5. Complete Fingerprint
 - a. The captured fingerprint image SHALL depict the fingerprint's upper part.
 - b. The captured fingerprint image SHALL depict the fingerprint's core area with ridge lines.
 - c. If delta features exists for the given fingerprint: The captured fingerprint image SHALL depict the fingerprints delta features.
 - d. The captured fingerprint image SHALL depict the fingerprint's baseline (bottom area).
6. The captured fingerprint image SHALL be unrotated. Thus, the vertical axis of the fingerprint depicted in the captured image SHALL be in parallel with the fingerprint image's vertical axis.
7. The captured fingerprint image provided by Acquisition Software SHALL meet the criteria of fingerprints as described in [BIB_ISO_19794_FINGER]. The requirements according to ▶Table 4.2 are mandatory.
8. The acquisition software SHALL detect and provide information about issues while rolling a finger which affect the quality of the captured fingerprint. Those information SHALL be considered as hardware reported issues in the capture process, see relevant PAP.

Setting Level	Scan Resolution Pixels/Centimeter (ppcm)	Scan Resolution Pixels/Inch (ppi)	Pixel Depth (bits)	Dynamic Range (Grey Levels)	Certification
31	197	500	8	200	EFTS/F
41	394	1000	8	200	EFTS/F

Table 4.2 Image Acquisition Settings Levels

4.3 FM Category Biometric Image Processing

The Function Module Biometric Image Processing (BIP) provides the extraction of all relevant biometric information from the data which is provided by the acquisition hardware or the acquisition software layer. Thus, a proprietary data block is transformed to a digital image of a biometric characteristic. In general, specific image processing for biometric characteristics is addressed here.

4.3.1 FM BIP-FI-DC-HQ

This Function Module describes requirements and interfaces for Biometric Image Processing with respect to the output of digital cameras to obtain a high quality facial image that fulfils the ISO requirements.

4.3.1.1 General Requirements

As a result of the image processing of this module, a facial image SHALL be compliant to the requirements of full frontal images specified in [BIB_ISO_19794_FACE]. Note, that padding SHALL NOT be used here. The minimum distance between both eyes for capture positions of the applicant in the preferred area of the camera range SHALL be at least 120 pixel.

The image processing SHALL enclose cropping the facial image, resulting in images with a height/width ratio of 4:3. The general requirements for the image cropping in ▶Table 4.3 SHALL apply to all images if no dedicated requirements are defined for a given use case in this Function Module. If the image is smaller than described in ▶Table 4.3 it SHALL NOT be rescaled.

Depending on the requirements of the modules of ▶Section 4.12, multiple differently cropped versions of the image might be created at this step of image processing.

Component	Value	Unit
Image height	1600	Pixel
Image width	1200	Pixel

Table 4.3 Requirements for the Size of Facial Images

4.3.1.2 Requirements GSAT Transactions

Requirements in ▶Table 4.3 SHALL NOT apply for German Standard for AFIS Transactions Version 3 (GSAT3) transactions. The requirements in ▶Table 4.4 SHALL apply to images used in GSAT3 transactions. If the image is smaller than described in ▶Table 4.4 it SHALL NOT be rescaled.

Note, the requirements regarding the image resolution for GSAT3 transactions of ▶Table 4.4 MAY be outdated. If the current version of [BIB_GSAT3] requires a different resolution the image resolution of [BIB_GSAT3] SHALL be applied instead.

Component	Value	Unit
Image height	800	Pixel
Image width	600	Pixel

Table 4.4 Requirements for the Size of Facial Images in GSAT Transactions

4.3.1.3 Requirements on Printing

If the image is also used for printing to the target size of 45mm x 35mm, it SHALL be cropped equidistantly from the original 4:3 aspect ratio.

Note that for the purpose of biometric processing, the 45:35 image SHALL NOT be considered any further.

4.3.2 FM BIP-FP-APP

This Function Module describes requirements and interfaces for the biometric image processing to provide up to four single finger images for the subsequent reference storage or biometric comparison.

4.3.2.1 Requirements

- The resolution of the fingerprint image has to be 500 ppi or 1000 ppi corresponding to the certification requirements of [BIB_ISO_19794_FINGER]⁴ and, therefore, MAY differ from the scan resolution.
- Depending on the call, as many individual fingerprints as requested SHALL be extracted from the input image and provided as single fingerprints.

Note: Segmentation for single finger scanners is OPTIONAL.

For this segmentation process, the following requirements SHALL be fulfilled:

- ability to accept fingerprints which are rotated in the same direction up to 45 degrees
- in the same direction rotated fingerprints have to be corrected to be vertical
- segment the first part over the finger (fingertip)
- segmentation has to occur on uncompressed data
- Fingerprint images SHALL NOT be upscaled. If the targeted system or database requires fingerprint images of higher size than captured the fingerprint image SHALL be evenly surrounded with white pixels to reach the desired size.

4.4 FM Category Quality Assessment

The Function Module Quality Assessment contains all kinds of mechanisms and procedures to check the quality of the biometric data or to select the best quality data out of multiple instances.

4.4.1 FM QA-FI-GENERIC

This Function Module describes requirements and interfaces for software that is used for quality assessment of digital images to ensure compliance with [BIB_ISO_19794_FACE]⁵.

4.4.1.1 Requirements

4.4.1.1.1 General Requirements

The QA module is used for the software-based automatic check of the conformance of the picture to [BIB_ISO_19794_FACE] after the digitisation. Thereby, the geometric properties of the picture as well as the digital parameters of the image are analysed and rated.

The standard which is relevant for the quality of facial images [BIB_ISO_19794_FACE] hierarchically describes requirements for the facial images. In the following, full frontal images are expected.

The QA module SHALL analyse and evaluate all of the quality components listed in ▶Table 4.5. For the components marked with "M", the quality values SHALL be provided while quality values for the components marked with "O" MAY be provided in the defined format according to the respective components.

A component is fulfilled if its calculated value is in the given threshold boundaries.

Based on the results of all provided quality components the QA module SHALL reject or approve the picture. The total result is true if every single quality component is fulfilled.

The QA module SHALL provide an interface for conformance testing where a single image can be processed and the calculated values and configuration data are returned. The image type to process depends on the image type requirements of the application profile to implement.

The QA module SHOULD operate on cropped images retrieved from the image processing according to ▶FM Category Biometric Image Processing.

⁴ The ISO/IEC 39794 series might be relevant here.

⁵ The ISO/IEC 39794 series might be relevant here.

ID	Component	ISO-Ref., compare [BIB_ISO_19794_FACE]	Mandatory / Optional	Unit/Range
Pose of the head				
1.1	Yaw, neck axis	7.2.2	O	Degrees
1.2	Pitch, ear axis	7.2.2	O	Degrees
1.3	Roll, nose axis	7.2.2	M	Degrees
Facial expression				
2.1	Neutral expression	7.2.3	O	Arbitrary units
2.2	Mouth closed	7.2.3	M	Arbitrary units
2.3	No raised eyebrows	7.2.3	O	Arbitrary units
Eyes				
3.1	Eyes open	7.2.3	O	Arbitrary units
3.2	No occlusion (glasses, hair, eye patch)	7.2.11 7.2.12	O	Arbitrary units
3.3	Eyes looking to the camera	7.2.3	O	Arbitrary units
Background				
4.1	Uniformity (plainness, no textures, colour)	7.2.6 A.2.4.3	O	Arbitrary units
4.2	No shadows	7.2.6 A.2.4.2	O	Arbitrary units
4.3	No further people / objects	7.2.4 A.2.3	O	Arbitrary units
Geometry				
5.1	Image height	8.3.5 A.3.1.1 A.3.2.1	M	In pixel
5.2	Image width	8.3.4 A.3.1.1 A.3.2.1	M	In pixel
5.3	Ratio: Head width / image width	8.3.4	M	As ratio between 0 and 1
5.4	Ratio: Head height / image height	8.3.5	M	As ratio between 0 and 1
5.5	Vertical position of the face	8.3.3	M	As ratio between 0 and 1
5.6	Horizontally centred face	8.3.2	M	As ratio between 0 and 1
5.7	Eye distance	8.4.1 A.3.1.1	M	In pixel
Subject lighting				
6.1	Equally distributed lighting	7.2.7	O	Arbitrary units
6.2	No shadows over the face nor in the eye-sockets	7.2.8 7.2.9	O	Arbitrary units
6.3	No hot spots on skin	7.2.10	O	Arbitrary units
6.4	No effects on glasses	7.2.11	O	Arbitrary units
Photographic requirements				
7.1	Proper exposure	7.3.2	M	Arbitrary units
7.2	Focus and depth of field	7.3.3	M	Arbitrary units
7.3	No unnatural colours	7.3.4	O	Arbitrary units

ID	Component	ISO-Ref., compare [BIB_ISO_19794_FACE]	Mandatory / Optional	Unit/Range
7.4	No red eyes	7.3.4	O	Arbitrary units
7.5	Colour space	7.4.2.3	M	According to [BIB_ISO_19794_FACE] using Decimal notation (e.g. "1" for RGB-24bit, "2" for YUV422 or "3" for 8bit-grey scale and "0" for <i>unknown</i> or errors)
7.6	Grey scale density and colour saturation	7.4.2.1 7.4.2.2	M	Counted numbers of intensity values existing within the image

Table 4.5 Mapping of Relevant Quality Components

4.4.1.1.2 Identification of the Best Capture

When multiple facial images and their corresponding set of quality metrics are present, the best capture of the list SHALL be identified in an automated manner as described in the following⁶:

1. If exactly one facial image conforms to more mandatory components than all other images, this image is chosen.
2. If more than one facial image is conform to more mandatory components than all other facial images, the facial image fulfilling the most optional components SHALL be chosen.
3. If more than one facial image is conform to more mandatory and optional components than all other facial images, the most recent facial image within this selection SHALL be chosen. If no timestamp is available, a random selection MAY be applied among the facial images fulfilling the most components.

4.4.2 FM QA-FI-ARE

This Function Module describes requirements and interfaces for software that is used for quality assessment of digital images within the context of alien register enrolment to ensure compliance with [BIB_ISO_19794_FACE].

4.4.2.1 Requirements

The threshold requirements of ▶Table 4.6 SHALL be in place within the context of alien register enrolment. These thresholds relate to the generic quality components of ▶FM QA-FI-GENERIC.

ID	Component	Minimum	Maximum	Unit/Range
Image ratio 4:3 (Image height / image width)				
1.1	Yaw, neck axis	-5	5	Degrees
1.2	Pitch, ear axis	-5	5	Degrees
1.3	Roll, nose axis	-8	8	Degrees
5.1	Image height	800	1600	In pixel
5.2	Image width	600	1200	In pixel
5.3	Ratio: Head width / image width	0,5	0,75	As ratio between 0 and 1
5.4	Ratio: Head height / image height	0,6	0,9	As ratio between 0 and 1
5.5	Vertical position of the face	0,3	0,5	As ratio between 0 and 1
5.6	Horizontally centred face	0,45	0,55	As ratio between 0 and 1
5.7	Eye distance	120	-	In pixel

⁶ Note that this is a description of the automated selection of the best capture among a list of facial images. Operators may always decide otherwise during the process (veto).

ID	Component	Minimum	Maximum	Unit/Range
7.5	Colour space	-	-	According to [BIB_ISO_19794_FACE] using Decimal notation (e.g. "1" for RGB-24bit, "2" for YUV422 or "3" for 8bit-grey scale and "0" for unknown or errors)

Table 4.6 Quality Threshold Requirements for Facial Images for Alien Register Enrolment

Please note, that for component 7.5 (Colour space) there still might be facial images from CIR that are greyscale images.

4.4.3 FM QA-FI-PG

This Function Module describes requirements for a photo guideline that is used for Quality Assessment.

4.4.3.1 Recommendations

If the QA is to be performed by a person, visual tools like a photo guideline MAY be used for support.

If the visual check is conducted with the photo guideline, it always SHALL be done even if the checks with the photo template and/or the QA software will be performed afterwards. A recent picture is required according to [BIB_ISO_19794_FACE].

If these basic components are not met, the image SHALL be rejected without any further checks by the software or the photo template.

In the case of the photo guideline, the following components SHALL be described, preferably using sample images for compliant and non compliant images (compare [BIB_ISO_19794_FACE]):

- frontal pose
- neutral expression
- mouth closed
- eyes open
- no occlusion (glasses, hair, eye patch)
- eyes looking to the camera
- background uniformity (plainness, no textures, colour)
- no shadows
- no head coverings
- no further people / objects
- equally distributed lighting
- no shadows over the face
- no shadows in the eye sockets
- no hot spots on skin
- no effects from glasses
- correct exposure
- correct contrast
- focus and depth of field
- no unnatural colours
- no red eyes

4.4.4 FM QA-FP-APP

This Function Module describes requirements for the quality assessment of plain or rolled fingerprints including quality assessment of single fingerprint, respectively slap and selection of the best quality image out of multiple instances.

4.4.4.1 Requirements

4.4.4.1.1 Quality Algorithm

As quality algorithm, the latest version of NIST Fingerprint Image Quality 2.2 (NFIQ2.2) [BIB_NFIQ2.2] SHALL be used, and therefore, images with 1000 ppi SHALL be resampled to 500 ppi before application of NFIQ2.2. Note, that the resampled image SHALL be used for NFIQ2.2 only. As resulting quality value, the output value of NFIQ2.2 in the integer range of [0,100] SHALL be used. In the case of failure, the returned error code 255 indicates that a computation was not successful and the resulting quality value SHALL be returned as the result, as described in ▶Section 4.11.1.

4.4.4.1.2 Quality Evaluation Process for a Slap or Single Fingerprint

In case a single captured fingerprint, respectively slap is passed, the QA SHALL be performed as described in the following. Beforehand, the fingerprints of the passed capture SHALL be segmented (considering missing fingers). Note, that in verification applications, a QA is not conducted. Thus, every slap capture is considered sufficient and no thresholds are specified here. Skipping the QA is expected to accelerate the overall process. OPTIONALLY, a QA can be performed.

1. For each segmented fingerprint $F_{A,j}$ of a passed capture A , a quality value $Q_{A,j}$ is calculated with $j \in 1, \dots, 10$ (up to 4 fingers in one slap) representing the specific finger code according to [BIB_ISO_19794_FINGER]⁷.
2. The resulting quality value is compared with the defined threshold TH_j for this finger. The application specific thresholds as defined in the following section apply.
3. In case all of the fingerprint qualities reach the specified threshold (i.e. $\forall j, Q_{A,j} \geq TH_j$), the Boolean information $b = 1$ indicates a successful capture.
4. In case one or more fingerprints do not reach the threshold (i.e. $\exists j, Q_{A,j} < TH_j$), the Boolean information $b = 0$ indicates insufficient quality of the capture.
5. For the segmented fingerprint $F_{A,j}$ the corresponding parameter set $P_{A,j}$ is compiled and returned.
6. As a result of the QA process, the following values are returned to the calling process:
 - a. the Boolean information b
 - b. the parameter set $P_A = Q_{A,j}, \dots, Q_{A,l}$ with $j, l \in 1, \dots, 10$ representing the specific finger code

4.4.4.1.3 Identification of the Best Capture out of Multiple Captures

When multiple captures $A_i, i \in 1, \dots, n$ and their corresponding set of segmented fingerprints $F_{A_i,j}$ with $j \in 1, \dots, 10$ representing the specific finger code according to [BIB_ISO_19794_FINGER]⁸ are passed, the best of the captures SHALL be identified as described in the following section:

1. For each segmented fingerprint $F_{A_i,j}$ of a passed capture A_i , the quality value $Q_{A_i,j}$ is calculated with representing the specific finger code according to [BIB_ISO_19794_FINGER].
2. The captures are ranked according to the quality values of the fingerprints according to the following (lexicographical) order. The highest ranked capture is considered as the capture yielding the best quality.
 - a. for left/right four-finger slaps, the order is as follows:
 - i. index finger (highest priority)
 - ii. middle finger

⁷ The ISO/IEC 39794 series might be relevant here.

⁸ The ISO/IEC 39794 series might be relevant here.

- iii. ring finger
- iv. little finger (lowest priority)

Example 1: Two Slaps of a right hand. Middle finger, ring finger and little finger of the first slap have a better quality than the middle finger, ring finger and little finger of the second slap, but the quality of the index finger is better in the second slap. Consequently, the second slap SHALL be taken.

Example 2: Three Slaps of a left hand. The quality of the index finger and the middle finger is the same in all three slaps, but the quality of the ring finger is better in the first slap. So the first slap SHALL be taken, no matter how high or low the quality of the little finger is in any slap.

- b. for thumb slaps, the order is as follows:
 - i. right thumb (highest priority)
 - ii. left thumb (lowest priority)
 - c. for index finger slaps:
 - i. In contrast to the other two slap types, the best capture of index finger slaps is a set of the best captures of each index finger as indicated by the following two options.
 If each index finger yields sufficient quality in at least one of the already conducted captures, the index fingers of sufficient quality are accepted and the total index finger slap capture is considered as of sufficient quality.
 If not both index fingers yield at least once sufficient quality in a capture, the best image for each index finger is returned as the best capture and the slap captured is considered as of insufficient quality.
 - ii. If for a single slap both index fingers yield to sufficient quality, those two index fingers SHALL be selected even if an index finger of another slap yield to better quality.
 - d. for rolled single finger captures:
 - i. Of the set of captured images obtained in the process beforehand, which are not annotated by a hardware reported issue, the capture with the highest quality value is considered as the best image.
 - ii. If the set of captured images obtained in the process beforehand on does only contain images which are annotated by hardware reported issues, the capture with the highest quality value of the entire set is considered as the best image.
 - iii. In case several captures yield to the same highest quality value, the last (temporal) of highest quality captures is considered as the best image.
3. As a result of the QA process, the following values are returned:
- a. the identifier i representing the capture yielding the best quality
 - b. the parameter set $P_A = Q_{A_{i,j}}, Q_{A_{i,l}}$ with $j, l \in 1, \dots, 10$.

4.4.4.1.4 Thresholds for Plain Fingerprints for Enrolment Purposes

The following thresholds as indicated in ▶Table 4.7 apply when fingerprints are captured plain for enrolment purposes. Note, the thresholds in ▶Table 4.7 do not apply to plain captured fingerprint in enrolment scenarios where the plain fingerprints are captured for control purpose of rolled fingerprints. In that case, thresholds as indicated in ▶Table 4.8 apply for the plain fingerprints.

Finger Position	Finger Code	NFIQ2.2 Threshold
Right thumb	1	30
Right index finger	2	30
Right middle finger	3	20
Right ring finger	4	10
Right little finger	5	10

Finger Position	Finger Code	NFIQ2.2 Threshold
Left thumb	6	30
Left index finger	7	30
Left middle finger	8	20
Left ring finger	9	10
Left little finger	10	10

Table 4.7 Thresholds for Plain Fingerprints for Enrolment Purposes

4.4.4.1.5 Thresholds for Plain Control Fingerprints and Fingerprints used for Identification Searches

The following thresholds as indicated in ►Table 4.8 apply when fingerprints are captured plain for the purpose of control slaps (used for comparison with rolled prints) or for use in identification searches. Note, the thresholds in ►Table 4.8 do apply to plain captured fingerprint in enrolment scenarios where the plain fingerprints are captured for control purpose of rolled fingerprints.

Finger Position	Finger Code	NFIQ2.2 Threshold
Right thumb	1	20
Right index finger	2	20
Right middle finger	3	20
Right ring finger	4	10
Right little finger	5	10
Left thumb	6	20
Left index finger	7	20
Left middle finger	8	20
Left ring finger	9	10
Left little finger	10	10

Table 4.8 Thresholds for Plain Control /Identification Fingerprints

4.4.4.1.6 Thresholds for Rolled Fingerprints

The following thresholds as indicated in ►Table 4.9 apply when fingerprints are captured rolled for enrolment purposes.

Finger Position	Finger Code	NFIQ2.2 Threshold
Right thumb	1	20
Right index finger	2	15
Right middle finger	3	15
Right ring finger	4	10
Right little finger	5	5
Left thumb	6	20
Left index finger	7	15
Left middle finger	8	15
Left ring finger	9	10
Left little finger	10	5

Table 4.9 Thresholds for Rolled Fingerprints

4.5 FM Category Presentation Attack Detection

The objective of the Function Module Presentation Attack Detection is to avoid presentations with the goal to subvert an enrolment, verification of identification process.

4.5.1 FM PAD-FP-APP

This Function Module describes requirements for PAD in the context of the acquisition of biometric characteristics of fingerprints.

4.5.1.1 Requirements

4.5.1.1.1 General Requirements

The capture system SHALL contain a PAD subsystem according to [BIB_ISO_PAD_1] detecting spoofing attempts using artefacts by which an attacker is trying to establish a different biometric characteristic as probe in the verification or identification process.

The PAD subsystem MAY consist of hardware and software (e.g. the used fingerprint scanner MAY have additional sensors designed for this purpose).

According to the used fingerprint scanner, PAD subsystem SHALL be able to detect artefact classes listed in the following:

- Fingertips, created in different thicknesses
- Single fingers (massive)

The PAD subsystem SHALL be able to detect all typical artefact material types listed in the following:

- Artefacts created from different kinds of silicon
- Artefacts created from different kinds of latex
- Artefacts created from different kinds of gelatine
- Artefacts created from different kinds of wood glue
- Artefacts created from different kinds of window painting
- Artefacts created from different kinds of paper

each in different colourings.

Under optimal testing conditions, the PAD subsystem SHALL feature a false-alarm-rate of 2% maximum when tested with bona fide biometric subjects with generally good quality fingerprints. This rate is monitored via logfiles analysis within the operational environment. If this rate is significantly exceeded, any certification that may have been issued might be re-evaluated (depending on application context)⁹.

Also, the detection subsystem SHALL be adequate to the usage setting in correspondence with the security requirements in question. The performance MAY be described by a risk analysis for every considered attack type. The current version of [BIB_ISO_PAD_3] SHALL be taken into account.

The PAD SHALL be conducted both in supervised acquisition scenarios, e.g. in a counter scenario, and in unsupervised acquisition scenarios, e.g. in SSS scenarios. Thereby, the PAD SHALL be conducted for all acquisition purposes, e.g. enrolment, identification and verification.

4.5.1.1.2 Integration Requirements

The PAD subsystem SHALL be independent of the regular capture subsystem.

It SHALL signal its detection results in the form of a PAD score for each finger individually. Additionally, an overall result SHALL be returned to the calling application.

The score for each finger SHALL be a normalized as double in the range [0,1] using at least ten uniformly distributed interim values, where 0 indicates bona fide and 1 presentation attack. A binary score SHALL NOT

⁹ Note that during certification a relaxed false-alarm-rate is tested. The requirement of the rate specified in this Function Module is tested on operational collected data only.

be used (e.g. True or False, 1 or 0). The PAD subsystem SHALL additionally provide detailed information about the scores of the PAD.

The overall result SHALL be a Boolean value (e.g. True or False). The value SHALL be true, if any of the fingers individual result triggers a PAD alarm.

Even if the Function Module is used within a comparison scenario, the detection result SHALL be signalled in any case, independent from any biometric comparison score. Also, the omission of the detection result SHALL be signalled in any case.

The PAD result SHALL correspond to the respective finger capture attempt.

Note, that an image of the fingerprint or slap in question SHALL be acquired independently of a possible PAD alarm.

4.5.1.1.3 Maintenance Requirements

As new technologies and new attack mechanisms are developed over time, the PAD subsystem SHALL be updated and checked whenever necessary, so it stays capable against old and new attacks and attack types.

4.5.1.1.4 Certification Requirements

To ensure comparable performance of presentation attack detection subsystems, the system SHALL be certified either under the Common Criteria Agreement according to one of following Protection Profiles:

- BSI-CC-PP-0063-2010: Fingerprint Spoof Detection Protection Profile (FSDPP)
- BSI-CC-PP-0062-2010: Fingerprint Spoof Detection Protection Profile based on Organisational Security Policies (FSDPP_OSP)
- BSI-CC-PP-0118-2022: Common Criteria Protection Profile - Biometric Mechanisms Protection Profile (BMPP), Version 2.0, base PP and at least the functional package PAD

or according to BSI TR-03122: Conformance Test Specification for Technical Guideline TR-03121 - Biometrics for Public Sector Applications, respectively this technical guideline. Note that the PAD certification according to BSI TR-03122 is preliminary and still subject to amendments. Anticipating certification under this Function Modul MAY only be realised with the permission of the Federal Ministry of the Interior and Community and upon consultation with the Federal Office for Information Security.

4.6 FM Category Compression

The objective of the Function Module Compression (COM) is to keep the biometric data within a feasible size without losing too much quality for a biometric verification or identification.

4.6.1 FM COM-FI-GENERIC

The following requirements are generic and apply to all FMs regarding compression of facial images.

4.6.1.1 Requirements

Multiple lossy compressions of the facial image data SHALL NOT take place with the exception of the initial capture by a digital camera whenever that camera does not support uncompressed image capture.

4.6.2 FM COM-FI-JPG

This Function Module describes requirements and interfaces for the compression of images using the JPEG format for reference storage.

4.6.2.1 Requirements

The compression method for facial images SHALL be JPEG (compare [BIB_ISO_10918-1]). The compression algorithm SHALL be parametrized in such a way that the application specific requirements as listed in ►Table 4.10 are met by the resulting compressed image. Multiple lossy compressions SHALL NOT take place.

Minimum File Size	Recommended Compression Ratio	Maximum Compression Ratio
Small size image (600x800 / 622x800 pixel)		
35 KiB	5:1	15:1
Standard size image (1200x1600 / 1244x1600 pixel)		
100 KiB	5:1	15:1

Table 4.10 Requirements to Compression Using JPEG Format

For conformance the implementation encapsulating the compression has to provide an interface that accepts predefined test data instead of performing the regular process.

4.6.3 FM COM-FP-WSQE

This Function Module describes requirements and interfaces for the compression of fingerprint images by Wavelet Scalar Quantisation (WSQ) method.

4.6.3.1 Requirements

WSQ SHALL be used as compression method for fingerprint images. A bit rate of 0.75 SHALL be used as compression parameter. This is equivalent to a compression factor of approximately 15:1¹⁰ (according to [BIB_ISO_19794_FINGER]¹¹). The implementation of the used WSQ algorithm SHALL be certified by the FBI and SHALL be referenced by the respective certificate number (coded in the WSQ header). The certified WSQ implementation SHALL be version 3.1 and SHALL base on NBIS Version 5.0. Multiple lossy compressions SHALL NOT take place.

If the resulting effective compression rate C does not fulfil the requirement of ▶Equation 4.3 for this particular case only a stronger or weaker compression C SHALL be used.

$$10 : 1 \leq C \leq 20 : 1 \quad (4.3)$$

Therefore, an iterative process SHALL be applied, which results in an image file with an effective compression rate within the defined range, refer to ▶Equation 4.3.

The effective compression rate SHALL be calculated by ▶Equation 4.4 where S_{wsq} is the size in bytes of the resulting WSQ file and S_{raw} is the size in bytes of the raw fingerprint image.

$$C = \frac{S_{raw}}{S_{wsq}} \quad (4.4)$$

4.7 FM Category Operation

Within the Function Module Operation (O), the working process is specified for the respective operator. All steps that have to be executed are described sequentially and in more detail. This also includes descriptions of how to proceed in error cases.

4.7.1 FM O-FI-ALL

This Function Module describes requirements to be observed by the operator who handles the facial image acquisition process. This includes the full working process.

4.7.1.1 Requirements

The operator SHALL be responsible for an adequate cleanliness of all capture hardware components.

4.7.1.2 Recommendations

OPTIONALLY, the operator can use the photo guideline.

¹⁰ For estimation of compression factor it is allowed to crop to the minimum size containing the fingerprint defined if a sensor is used with a larger capturing area than this minimum.

¹¹ The ISO/IEC 39794 series might be relevant here.

4.7.2 FM O-FI-DC

This Function Module describes requirements to be observed by the operator who handles the facial image acquisition process with a digital camera.

4.7.2.1 Requirements

- The operator SHALL ensure that different environmental lighting conditions caused by direct or indirect sunlight and different seasons of the year SHALL NOT influence the proper and uniform lighting of the captured facial image.
- Direct and cross irradiation of lighting SHALL be avoided by the operator.

4.7.3 FM O-FP-ALL

This Function Module describes requirements to be observed by the operator who handles the acquisition process of fingerprint images.

4.7.3.1 Requirements

4.7.3.1.1 Operation of Devices

- The operator SHALL be responsible for an adequate cleanliness of all capture hardware components. Fingerprint scanners SHALL be cleaned regularly to provide good probe images.
- The fingerprint scanner SHALL be regularly calibrated (e.g. once a day), if the used fingerprint scanner technology requires such a calibration. The operator SHALL ensure that the sensor platen is clean before calibration to reduce the risk of ghost images.

4.7.3.1.2 Environmental Requirements

- The operator SHALL ensure that different environmental lighting conditions caused by direct or indirect sunlight and different seasons of the year SHALL NOT influence the scanner capture process.
- Direct and cross irradiation of lighting on the sensor platen SHALL be avoided completely.

4.8 FM Category User Interface

It is the task of the User Interface (UI) to display and visualise the respective information that is obtained from the underlying Function Modules.

4.8.1 FM UI-FI-OP

This Function Module describes requirements for the user interface of the software displaying the result of the quality assessment and verification (if performed) of facial images to the operator.

4.8.1.1 Requirements

- The current evaluated picture SHALL be displayed to the operator for the enrolment.
- All components evaluated with the current value and threshold as well as their relation: OK/NOK for every component SHALL be displayed to the operator for the enrolment.
- The summarised result OK/NOK for the current picture SHALL be displayed to the operator for the enrolment.
- The provision of the veto power for the operator SHALL be shown to the operator for the enrolment:
 - enforcement of OK for obvious reasons (e.g. disability)
 - enforcement of OK without obvious reasons
 - enforcement of NOK to overrule software based quality assessment
- If PAD has been performed and a presentation attack alarm has been raised, a warning with the overall result SHALL be displayed to the operator. All facial images within an acquisition where at least one facial image caused a PAD alarm SHALL be displayed to the operator. Those facial images for which a PAD alarm

is present SHALL be highlighted (e.g. by a red frame). In cases where the execution of PAD is MANDATORY and no PAD result is available, the operator SHALL be informed of the missing PAD result.

If verifications are performed¹²:

- Visual feedback of the verification process SHALL be provided for the operator. At least both images (live and reference) and the (Boolean) result of the verification SHALL be displayed to the operator.
- If the verification fails, then the operator SHALL get access to at least one complete and coherent set of biometric samples and verification results corresponding to a single verification attempt. For instance, in case of verification of a live-captured facial image against a facial image from chip (Data Group 2) and CIR, such a complete set would consist of the live-captured facial image, the facial image extracted from chip, the facial image stored in the CIR, and both corresponding verification results of the live-captured facial image against the facial image from chip and the CIR image.

4.8.2 FM UI-FI-BSJ

This Function Module describes requirements for the user interface of facial image acquisition shown to the biometric subject.

4.8.2.1 Requirements

If PAD was conducted: Neither the PAD result nor PAD score SHALL be displayed to the person whose facial image is acquired. In a supervised acquisition scenario the process operator MAY be responsible for screen positioning, so that the PAD result or the PAD score is not displayed to the person whose facial image is acquired.

If the acquisition system is required to have a feedback screen for the facial image acquisition within a specific application context, or if the vendor decided to implement a feedback screen although it is OPTIONAL in the respective application context, the following requirements SHALL be fulfilled:

- The acquisition system SHALL show a digital mirror or physical mirror image to the biometric subject to guide it for the correct positioning in front of the camera.
- The acquisition system SHALL show user guidance information to help the biometric subject with the correct positioning in front of the camera when one of the following conditions is met:
 - The biometric subject is too close to or too far away from the camera.
 - The biometric subject is too far left or right to the camera.
 - The biometric subject is too high or low and the camera is not able to compensate this with a vertical adjustment.
 - The biometric subject is in too much movement.
 - The biometric subject is not facing frontally to the camera.
 - The eyes of the biometric subject are closed.
 - The mouth of the biometric subject is opened.
 - Multiple faces are detected in front of the camera.

4.8.2.2 Recommendations

- An indicator showing the capture status SHOULD be displayed to the biometric subject.
- Graphics (e.g. buttons or pictograms) SHOULD use a uniform colour palette without utilizing clashing colours.

4.8.3 FM UI-FP-BSJ

This Function Module describes requirements for the user interface of the biometric subject for fingerprint acquisitions. The user interface MAY be e.g. monitors, buttons, pictograms or status lights.

¹² This is only the case if the application profile defines verification processes explicitly.

4.8.3.1 Requirements

The following requirements SHALL be met for the user interface:

- An indicator showing the capture status and an indication when the capture process has finished SHALL be displayed to the biometric subject. The capture status SHALL include: Where to place the fingers, an indication of the scanning process and the feedback in case of mispositioning of fingers.
- In an unsupervised scenario a visualisation which fingerprint or hand to place on the sensor SHALL be given, whereby in the case of a supervised scenario the visualisation MAY be given.

If PAD was conducted: Neither the PAD result nor PAD score SHALL be displayed to the person whose fingerprints are acquired. In a supervised acquisition scenario the process operator MAY be responsible for screen positioning, so that the PAD result or the PAD score is not displayed to the person whose fingerprints are acquired.

4.8.3.2 Recommendations

The following recommendations SHOULD be met for the user interface:

- Graphics (e.g. buttons or pictograms) SHOULD use a uniform colour palette without utilizing clashing colours.
- The acquisition process SHOULD be displayed as real time feedback to the biometric subject (e.g. with the help of a feedback monitor).

4.8.4 FM UI-FP-OP

This Function Module describes requirements for the user interface of the software displaying the live feedback and results of the fingerprint acquisition, QA and control verification of fingerprint images to the operator.

4.8.4.1 Requirements

- The user interface SHALL signal which fingerprints are expected for the current slap or fingerprint acquisition such that the operator can guide the biometric subject to place the correct fingers on the fingerprint scanner.
- Visual feedback of the fingerprint acquisition at least displaying of the final images SHALL be provided to the operator.
- If a uniqueness check error occurs, the fingers involved in the unexpected successful comparisons SHALL be pictorially displayed to the operator and in case of a slap image, only the affected finger(s) SHALL be marked in the displayed image. In case a control verification was attempted and no successful comparison occurred during the control verification, a warning SHALL be displayed to the operator that the control verification was not successful.
- The segmented single fingerprints SHALL be visualised to the operator to identify potential failures in segmentation. This can be realised by displaying the result containing up to ten segmented single fingerprints. In case the amount of captured fingerprints mismatches with the amount of expected fingers a warning SHALL be displayed to the operator.
- If a slap acquisition is in place and a slap classifier is in use (and activated not only for evaluation purpose), a warning SHALL be displayed to the operator when the classification result mismatches with the expected slap of the current acquisition.
- If PAD has been performed and a presentation attack alarm has been raised, a warning SHALL be displayed to the operator and displayed for each finger individually. An overall result SHALL also be displayed additionally. In cases where the execution of PAD is MANDATORY and no PAD result is available, the operator SHALL be informed of the missing PAD result.
- The indication of the quality level SHALL be displayed to the operator.
- The provision of the veto power for the operator SHALL be shown to the operator for the enrolment:
 - enforcement of OK for obvious reasons (e.g. disability)

- enforcement of OK without obvious reasons
- enforcement of NOK to overrule software based quality assessment

4.8.4.2 Recommendations

A live view from the fingerprint scanner **SHOULD** be displayed to the operator during the fingerprint acquisition. This also includes live information, e.g. about the correct positioning of fingers on the fingerprint scanner or about the current quality level, that supports the operator guiding the biometric subject.

The user interface **SHOULD** show a graphical representation of the fingerprints that are expected for the current slap or fingerprint acquisition.

4.9 FM Category Reference Storage

The objective of the Function Module Reference Storage (REF) is to store biometric data in a way that it can be used for reference purposes later on.

4.9.1 FM REF-FI-ARE

This Function Module describes requirements how facial images are stored as reference data in the context of the Application Arrival Document.

4.9.1.1 Requirements

The facial image of an applicant **SHALL** be stored in the CIR and made available immediately for further identification requests.

4.9.2 FM REF-FP-ARE

This Function Module describes requirements how fingerprint images are stored as reference data within the context of the Application Arrival Document.

4.9.2.1 Requirements

The captured fingerprints of an applicant **SHALL** be stored in the CIR and made available immediately for further identification requests.

4.10 FM Category Biometric Comparison

The Function Module Biometric Comparison (CMP) encloses the mechanisms and algorithms to verify or identify an identity based on a 1:1 or 1: n biometric comparison between reference data and a current biometric probe (usually a live presented image) regardless of where the reference is stored (e.g. passport, identity card, Automated Biometric Identification System (ABIS), database, ...).

It is **RECOMMENDED** that the verifications conducted during uniqueness checks comply with this FM.

4.10.1 FM CMP-FP-CV

This Function Module contains requirements for the control-verification of plain and rolled captured fingerprints.

4.10.1.1 Requirements

A fingerprint verification algorithm **SHALL** be used for control-verification of the plain and rolled captured fingerprints intended for enrolment.

The used verification algorithm **SHALL** be configured at a security level (threshold) guaranteeing a maximum false-match-rate (FMR) of at least 0,1 % (1/1000) at a false-non-match-rate (FNMR) below 2 %. It **SHALL** be allowed to configure a threshold which allows stronger settings (lower FMR and/or FNMR).

Furthermore, the overall system **SHALL** be calibrated for the security level set within this specific scenario of verification. The vendor of the verification algorithm **SHALL** provide calibration data based on the actual system performance.

Input data of the verification are the segmented plain and rolled captured fingerprints from the applicant. Output of the algorithm SHALL be a comparison score for both prints of each captured finger and the result of the verification depending on the configured threshold of the algorithm.

4.11 FM Category Logging

The Function Module Logging (LOG) contains logging requirements. The requirements of this chapter and the requirements of the schema of information to log apply both.

4.11.1 FM LOG-ALL-GENERIC

The Function Module Logging contains requirements as to which data has to be logged for a specific application.

4.11.1.1 Requirements

- A transaction SHALL cover all information concerning one single biometric subject. Created IDs SHALL be unique globally. During the biometric process all data SHALL be gathered or created by the application.
- Each transaction SHALL contain the generic process information about the system that are defined in `type.transaction`. The exact semantic for the location of station is profile-dependent. See the specific profile for a refined definition. If the transaction is dependent or derived from another transaction the ID of the reference SHALL be set.
- In case of abnormal termination of the transaction or any of its sub-processes, the error code SHALL be logged. The vendor SHALL provide a detailed list of all error codes used with complete semantic descriptions.
- During the transaction performed enrolment processes SHALL be logged as `Enrolment`. In cases where the central system replies directly with enrolment status information the submit time SHALL be recorded. If any control verification is performed during enrolment the result SHALL be contained.
- For identification processes the data defined in `Identification` SHALL be recorded. The list of candidates SHALL be contained if detailed scoring information is provided by the central system.
- A verification processes SHALL be recorded based on the `Verification` element. Per verification all performed comparisons SHALL be included. For each comparison the vendor specific score as well as the threshold SHALL be contained.

4.11.2 FM LOG-ALL-ARE

This Function Module describes additional requirements and interfaces for the logging of process information for the application Arrival Attestation Document.

4.11.2.1 Requirements

If the optional image delivery is implemented: All information about any existing facial images of the applicant in the CIR SHALL be logged. This includes the number of images, whether an acceptable image is available and whether any of the acceptable images was used (information gathered within the `FaceDelivery` element). For each during the enrolment performed control verification the results SHALL be logged.

The location SHALL be logged by the name of the city or village where the biometric process takes place.

In order to allocate alien register enrolment logs to their respective application profile the element `ApplicationProfile` SHALL be filled as described in ▶ Table 4.11.

Application Profile within TR	ApplicationProfile-Element
▶ Application Profile Registration with Biometric Identification	<code>ARE_RegistrationWithBiometricIdentification</code>
▶ Application Profile Document Issuing with Biometric Verification	<code>ARE_IssuingWithBiometricVerification</code>
▶ Application Profile Arrival Attestation Document (Single Process at Counter)	<code>ARE_ArrivalAttestationDocument</code>

Application Profile within TR	ApplicationProfile-Element
►Application Profile Arrival Attestation Document in Special Situations	ARE_ArrivalAttestationDocumentInSpecialSituations

Table 4.11 Mapping Logs to Application Profiles

Logging for ►Application Profile Registration with Biometric Identification SHALL be done with the `MultiModalProcess` element as root containing only the following sub-elements (besides the already required elements and attributes by the XML-schema itself):

- `FingerAcquisition` (for plain fingerprints)
- `FaceDelivery` (if implemented)
- `FaceAcquisition` (if image delivery is not implemented or the delivered image(s) are of insufficient quality)
- `Identification` (using the acquired plain fingerprints)

Logging for ►Application Profile Document Issuing with Biometric Verification SHALL be done with the `are-log` element as root containing only the following sub-elements (besides the already required elements and attributes by the XML-schema itself):

- `MultiModalProcess` (taken over from previous registration of ►Application Profile Registration with Biometric Identification)
- `FingerAcquisition` (for rolled fingerprints)
- `Verification` (for control verification of previously acquired plain fingerprints against the acquired rolled fingerprints)
- `Records` (for the created GSAT-XML using the records of the acquisitions and/or delivery)
- `Enrolment`

Logging for ►Application Profile Arrival Attestation Document (Single Process at Counter) and ►Application Profile Arrival Attestation Document in Special Situations SHALL be done with the `are-log` element as root element containing only the following sub-elements (besides the already required elements and attributes by the XML-schema itself):

- `FingerAcquisition` (for plain fingerprints)
- `FingerAcquisition` (only for ►Application Profile Arrival Attestation Document (Single Process at Counter): for rolled fingerprints)
- `Identification` (using the acquired plain fingerprints)
- `Verification` (only for ►Application Profile Arrival Attestation Document (Single Process at Counter): for control verification of previously acquired plain fingerprints against the acquired rolled fingerprints)
- `FaceDelivery` (if implemented)
- `FaceAcquisition` (if image delivery is not implemented or the delivered image(s) are of insufficient quality)
- `Records` (for the created GSAT-XML using the records of the acquisitions and/or delivery)
- `Enrolment`

4.11.3 FM LOG-FI-GENERIC

This Function Module describes requirements and interfaces for the logging of information regarding facial images for all profiles.

4.11.3.1 Requirements

- Within a transaction for each facial image acquisition or delivery performed for enrolment, verification or identification, all data defined in `FaceAcquisition` (of which some MAY be contained within a `MultiModalProcess`) or `FaceDelivery` SHALL be collected, if available.
- During an acquisition process, the available details for all captures SHALL be logged.

- If a veto was put by the operator the type of veto (OK/NOK) SHALL be set.
- Detailed quality information SHALL be logged at least for the selected facial image. The overall result MAY be omitted if it is undefined. For each component the identifier, upper and lower value bound as well as the upper and lower threshold bound SHALL be included if available. When more than one facial image is present, all face quality elements SHALL reference to the corresponding record element.
- For each performed PAD the detailed PAD quality values accompanied by identifiers, upper and lower value bounds and upper and lower threshold bounds SHALL be collected.
- If a user interface is available during the acquisition process, the displayed information, e.g. an indication of a PAD alert or live feedback screen SHALL be logged.
- In case of abnormal termination of the facial image acquisition process or any of its sub-processes, the error code SHALL be logged. The vendor SHALL provide a detailed list of all error codes used with complete semantic descriptions. In the special case that image acquisition is canceled, logging of information is only expected in the border control domain.

4.11.4 FM LOG-FP-GENERIC

This Function Module describes requirements and interfaces for the logging of information regarding fingerprint images for all profiles.

4.11.4.1 Requirements

- Within a transaction for each fingerprint acquisition or delivery performed for enrolment, verification, control verification or identification, all data defined in `FingerAcquisition` (of which some MAY be contained within a `MultiModalProcess`) or `FingerDelivery` SHALL be collected, if available. If a fingerprint could not be acquired, the reason for each missing finger SHALL be logged.
- For each capture process of a dedicated fingerprint or slap, all available information SHALL be logged. In case of multiple captures for a finger or slap the number of the capture details for which slap was selected as the best capture SHALL be specified. Within the finger capture the reference to the corresponding record of the probe SHALL be set. Further the details of each during the capture performed attempt SHALL be provided, including the reference to the corresponding record if available. In case of an unacceptable capture attempt the reason for rejection of this capture attempt SHALL be selected. If the rejection reason is other an error code detailing the reason of rejection SHALL be set.
- If a veto was put by the operator the type of veto (OK/NOK) SHALL be set.
- For the best capture attempt, detailed quality information about the result SHALL be logged. For all other capture attempts quality information, if calculated during the process, SHOULD be logged. For each finger or slap within a capture the quality result value and the threshold SHALL be presented within a range from 0 to 100 when available. If an overall quality value can be estimated by the quality assessment algorithm it SHALL be specified.
- If a slap classification is performed during the acquisition process, the details SHALL be logged as `FingerClassifierInformation`. This includes the classification results, information about the configured threshold of the algorithm and whether the classifier has been used in evaluation mode.
- When a uniqueness check is performed, the results SHALL be collected. If the FMR is known, the security level for the uniqueness check SHALL be contained. The log SHALL specify all detected duplicate fingers.
- For each performed PAD the detailed PAD quality values accompanied by identifiers, upper and lower value bounds and upper and lower threshold bounds SHALL be collected. In case the probe is a slap and a PAD result is expected for each individual finger of the slap, the finger code SHALL be defined and PAD information SHALL be present for each finger.
- If a user interface is available during the acquisition process, the displayed information, e.g. an indication of a PAD alert or live feedback screen SHALL be logged.
- In unsupervised acquisition scenarios all available surveillance information SHALL be stored for each corresponding capture attempt. The surveillance image contained within a record SHALL be linked to the fingerprint capture attempt.

- It SHALL be logged if multiple persons have been detected or not during the fingerprint acquisition process or single capture attempts.
- When the acquisition process is performed with the presence of a configured timeout the corresponding value SHALL be specified in milliseconds. The logging of the configured value SHALL be independent from the occurrence of a timeout.
- If a control verification is performed (e.g. for rolled vs flat fingerprints or for fingerprints acquired at a SSS vs fingerprints acquired at the counter) all available information SHALL be logged within a *Verification* element.
- In case of abnormal termination of the fingerprint acquisition process or any of its sub-processes, the error code SHALL be logged. Errors during the fingerprint segmentation or uniqueness check SHALL be specified additionally by their corresponding error element. The vendor SHALL provide a detailed list of all error codes used with complete semantic descriptions. In the special case that image acquisition is canceled, logging of information is only expected in the border control domain.
- Information about the configured pixel density in dpi (dots-per-inch) of the fingerprint scanner SHALL be contained in *FingerAcquisition/Hardware/ConfigurationInformation* using *PixelDensity* as type.

4.12 FM Category Coding

This Function Module Coding (COD) contains the procedures to encode quality data as well as biometric data in defined formats. Interoperability is provided by means of standard compliant coding.

4.12.1 FM COD-ALL-ARE

This Function Module describes requirements and interfaces for the overall coding of biometric and biographic data used within the context of the Arrival Attestation Document.

4.12.1.1 Requirements on Biometric and Biographic Data Encoding for the Central Foreigners Register

Biographic data and the facial image are delivered to the Central Foreigners Register in the compressed format as defined by ▶Section 4.6 with further encoding.

4.12.1.2 Requirements on Biometric and Biographic Data Encoding in GSAT 3

In general the XML-based standard [BIB_GSAT3] does apply for coding of both biometric and biographic data of an applicant and process related data. Depending on the biometric modality, the corresponding coding Function Module SHALL be considered. The current version of the GSAT3 SHALL be used.

4.12.1.3 Requirements on Encoding Logging Data

- The logging data as defined by the ▶Section 4.11 SHALL be encoded as XML according to the schema definition as *are-log* element. The XML encoding is defined by the XML schema definition in the file „are6v1.xsd“ and referenced schema files.
- Optional attributes and elements of the schema SHALL be considered as far as possible (e.g. error codes only need to be logged, in case an error occurred; an acquisition element is only required, in case an acquisition process has at least been started).
- All log data SHALL be encoded as far as it is available throughout the acquisition process (e.g. fingerprint quality data is encoded if and only if fingerprint capture was performed).
- The GSAT3 transaction container SHALL be embedded in the XML log as *XMLRecord* element.

4.12.2 FM COD-FI-GSAT3

This Function Module describes requirements and interfaces for the coding of facial images according to the German Standard for AFIS transactions in XML format.

4.12.2.1 Requirements on Encoding

For data format and encoding, the XML-based standard [BIB_GSAT3] SHALL apply. The current version of GSAT3 SHALL be used.

4.12.3 FM COD-FP-GSAT3

This Function Module describes requirements and interfaces for the coding of fingerprint images according to the German Standard for AFIS transactions in XML format.

4.12.3.1 Requirements on Encoding

For data format and encoding, the XML-based standard [BIB_GSAT3] SHALL apply. The current version of the GSAT3 SHALL be used.

Note, if all fingers are available, a total number of 14 fingerprint records (`it1:PackageFingerprintImageRecord`) is to be transferred (10 fingerprints plus 4 slap images of right hand, left hand, right thumb and left thumb), regardless of the setting in use (4-1-4-1 or 4-4-2).

List of Abbreviations

Abbreviation	Description
ABIS	Automated Biometric Identification System
AFIS	Automated Fingerprint Identification System
AH	Acquisition Hardware
ARE	Alien Register Enrolment
AS	Acquisition Software
BEA	Biometric Evaluation Authority
BIP	Biometric Image Processing
CIR	Central Identity Register
CMP	Biometric Comparison
COD	Coding
COM	Compression
CTF	contrast transfer function
EBTS	Electronic Biometric Transmission Specification
FM	Function Module
FMR	false-match-rate
FNMR	false-non-match-rate
GSAT3	German Standard for AFIS Transactions Version 3
HLBS	High Level Biometric Services
LOG	Logging
NFIQ2.2	NIST Fingerprint Image Quality 2.2
O	Operation
PAD	Presentation Attack Detection
PAP	Partial Application Process
PIV	Personal Identity Verification
QA	Quality Assessment
REF	Reference Storage
SNR	signal-to-noise ratio
SSS	self-service system
UI	User Interface
WSQ	Wavelet Scalar Quantisation

Bibliography

- [BIB_AKNV] *Ankunftsachweisverordnung*.
- [BIB_AsyIG] *Asylgesetz of 02. September 2008 (BGBl. I S. 1798), last changed by law from 20. July 2017 (BGBl. I S. 2780)*.
- [BIB_AZRG] *Allgemeine Verwaltungsvorschrift zum Gesetz über das Ausländerzentralregister und zur Verordnung zur Durchführung des Gesetzes über das Ausländerzentralregister of 26. October 2009*.
- [BIB_AZRGDV] *Verordnung zur Durchführung des Gesetzes über das Ausländerzentralregister of 17. May 1995 (BGBl. I S. 695), last changed by Art. 3 VO zur Umsetzung aufenthaltsrechtlicher Richtlinien der EU zur Arbeitsmigration of 1. August 2017 (BGBl. I S. 3066)*.
- [BIB_EBTS/F] *FBI Electronic Biometric Transmission Specification Version 11, Appendix F, April 2021*.
- [BIB_GSAT3] *German Standard for AFIS transactions. XML schema files current version*.
- [BIB_ICAO_TR_Portrait_Quality] *ICAO Technical Report: Portrait Quality (Reference Facial Images for MRTD), version 1.0, April 2018*.
- [BIB_ISO_10918-1] *ISO/IEC 10918-1:1994 "Information technology – Digital compression and coding of continuous-tone still images: Requirements and guidelines"*.
- [BIB_ISO_19794_FACE] *ISO/IEC 19794-5:2005 "Information technology – Biometric data interchange formats – Part 5: Face image data"*.
- [BIB_ISO_19794_FINGER] *ISO/IEC 19794-4:2005 "Information technology – Biometric data interchange formats – Part 4: Finger image data"*.
- [BIB_ISO_PAD_1] *ISO/IEC 30107-1:2023 "Information technology – Biometric presentation attack detection – Part 1: Framework"*.
- [BIB_ISO_PAD_3] *ISO/IEC 30107-3:2023 "Information technology – Biometric presentation attack detection – Part 3: Testing and reporting"*.
- [BIB_NFIQ2.2] *NIST Fingerprint Image Quality 2.2*.
- [BIB_PIV] *Personal Identity Verification (PIV) Image Quality Specification for Single Finger Capture Devices, FBI/CJIS Biometric Specifications, 10 July 2006*.