

MCU/MPU Filters

★



Commercial Part Number

STM32F103C8

STM32F103C8T6

STM32F103C8T6TR

STM32F103C8T7

STM32F103C8T7TR

Q

PRODUCT INFO

Segment

>

Series

>

Line

>

Marketing Status

>

Price

>

Package

>

Core

>

Coprocessor

>

MEMORY

Flash = 64 (kBytes)

64

EEPROM = 0 (Bytes)

Featu...

Block Diagr...

Docs & Resour...

CAD Resour...

Datash...

...

Start Proj...

★

STM32WL3R two-in-one wireless SoC


Compact, long-life RF solutions for remote controls



MCUs/MPUs List: 4 items

Export

*	Commercial...	Part No	Reference	Marketin...	Unit Price for ...	Bo...	Package	Flash	RAM	I/O	Freq...
☆	STM32F103C...	STM32F10...	STM32F103...	Active	2.7946		LQFP 48 7x7x1.4 mm	64 kBy...	20 kBy...	37	72 MHz
☆	STM32F103C...		STM32F103...	Active	2.7946		LQFP 48 7x7x1.4 mm	64 kBy...	20 kBy...	37	72 MHz
☆	STM32F103C...		STM32F103...	Active	2.9903		LQFP 48 7x7x1.4 mm	64 kBy...	20 kBy...	37	72 MHz
☆	STM32F103C...		STM32F103...	Active	2.9903		LQFP 48 7x7x1.4 mm	64 kBy...	20 kBy...	37	72 MHz

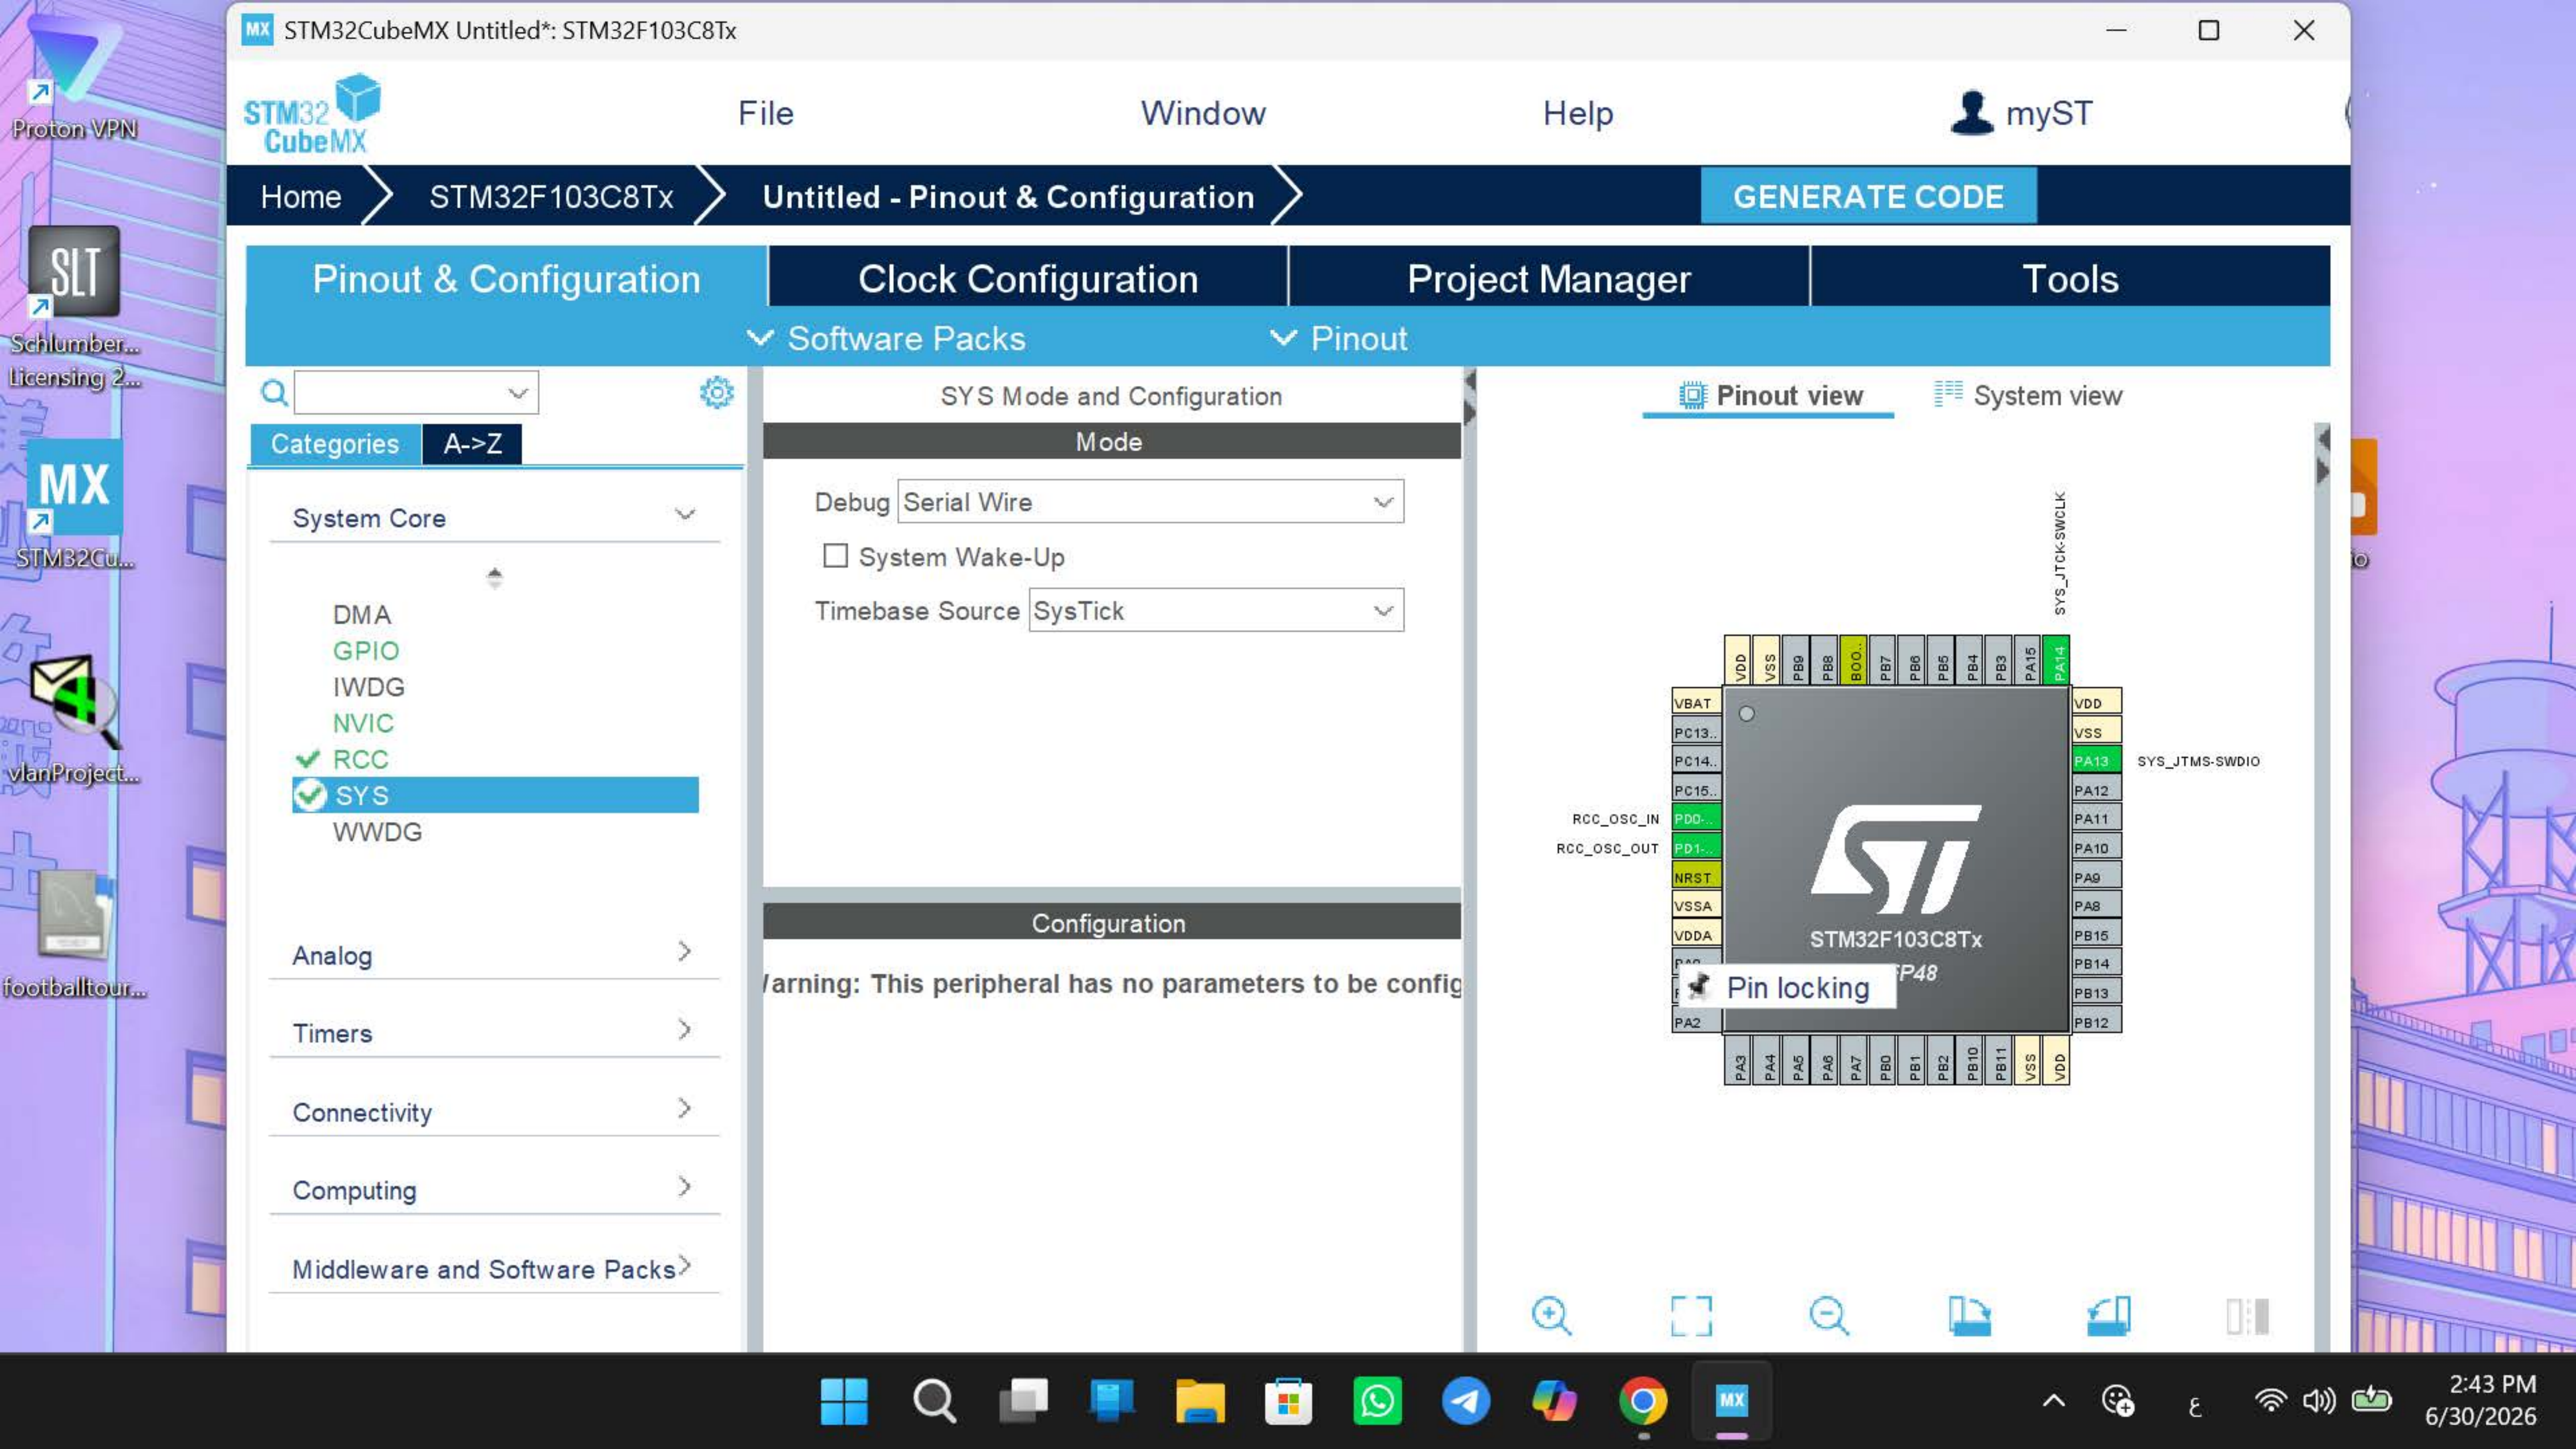

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

⚠ SYS

WWDG

Analog

Timers

Connectivity

Computing

Middleware and Software ...

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Crystal/Ceramic Resonator

Low Speed Clock (LSE) Disable

☐ Master Clock Output

Configuration

Reset Configuration

✓ NVIC Settings

✓ GPIO Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Search (Ctrl+F)



System Parameters

VDD voltage (V)





3.3 V

Prefetch Buffer

Enabled

Pinout view

System view

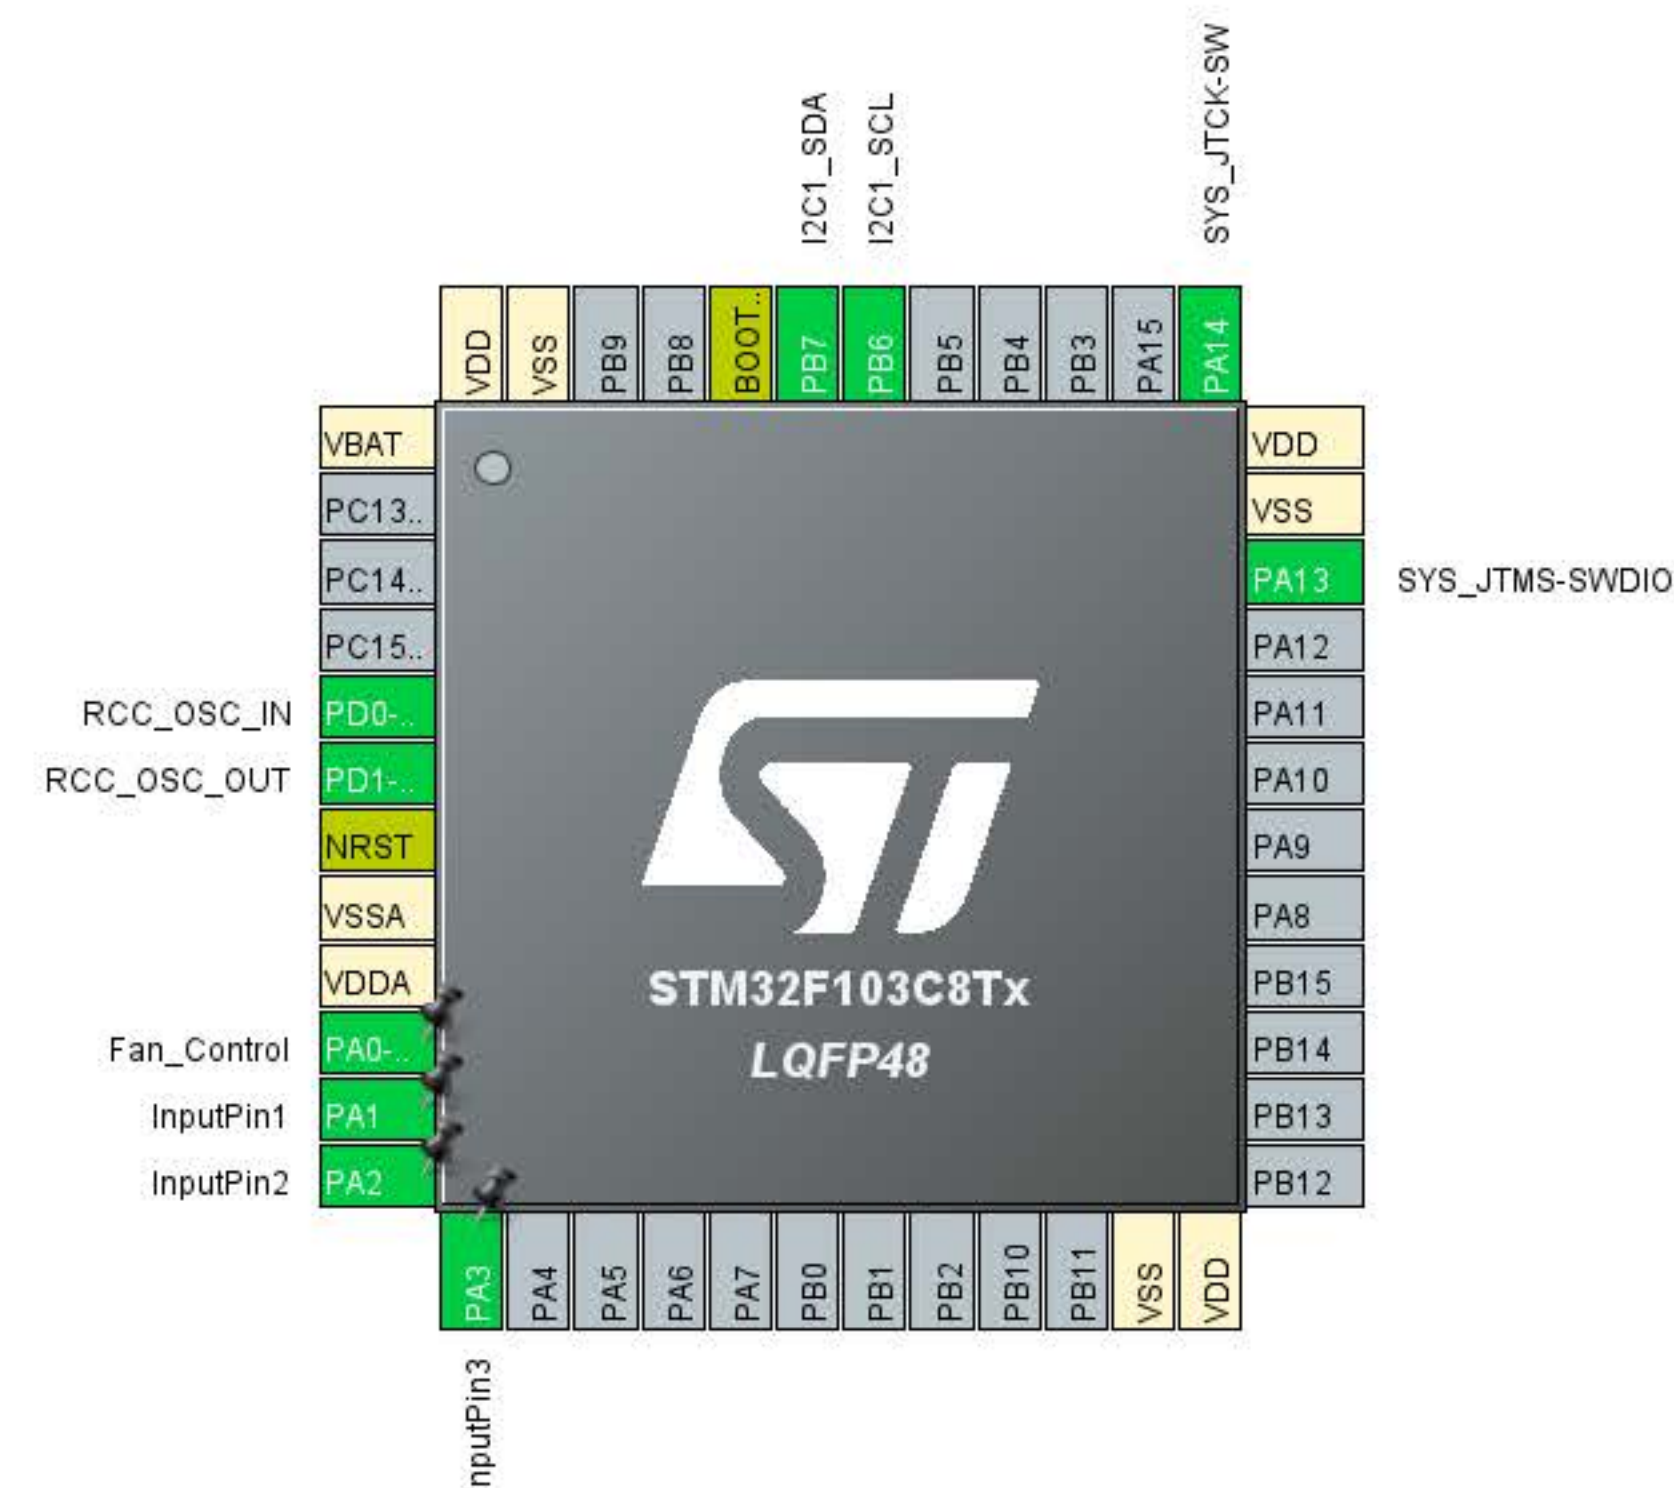

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

⚠ SYS

WWDG

Analog

Timers

Connectivity

Computing

Middleware and Software ...

GPIO Mode and Configuration

Configuration

Group By Peripherals

✓ GPIO

✓ I2C

✓ RCC

✓ SYS

Search Signals

Search (Ctrl+F)






☐ Show only Modified Pins

Pin ...	Signal ...	GPIO ...	GPIO ...	GPIO ...	Maxim...	User L...	Modified
PA0-...	n/a	Low	Output...	No pull...	Low	Fan_C...	✓
PA1	n/a	n/a	Input ...	Pull-up	n/a	InputPin1	✓
PA2	n/a	n/a	Input ...	Pull-up	n/a	InputPin2	✓
PA3	n/a	n/a	Input ...	Pull-up	n/a	InputPin3	✓

? Select Pins from table to configure them. **Multiple selection is Allowed.**

Pinout view

System view

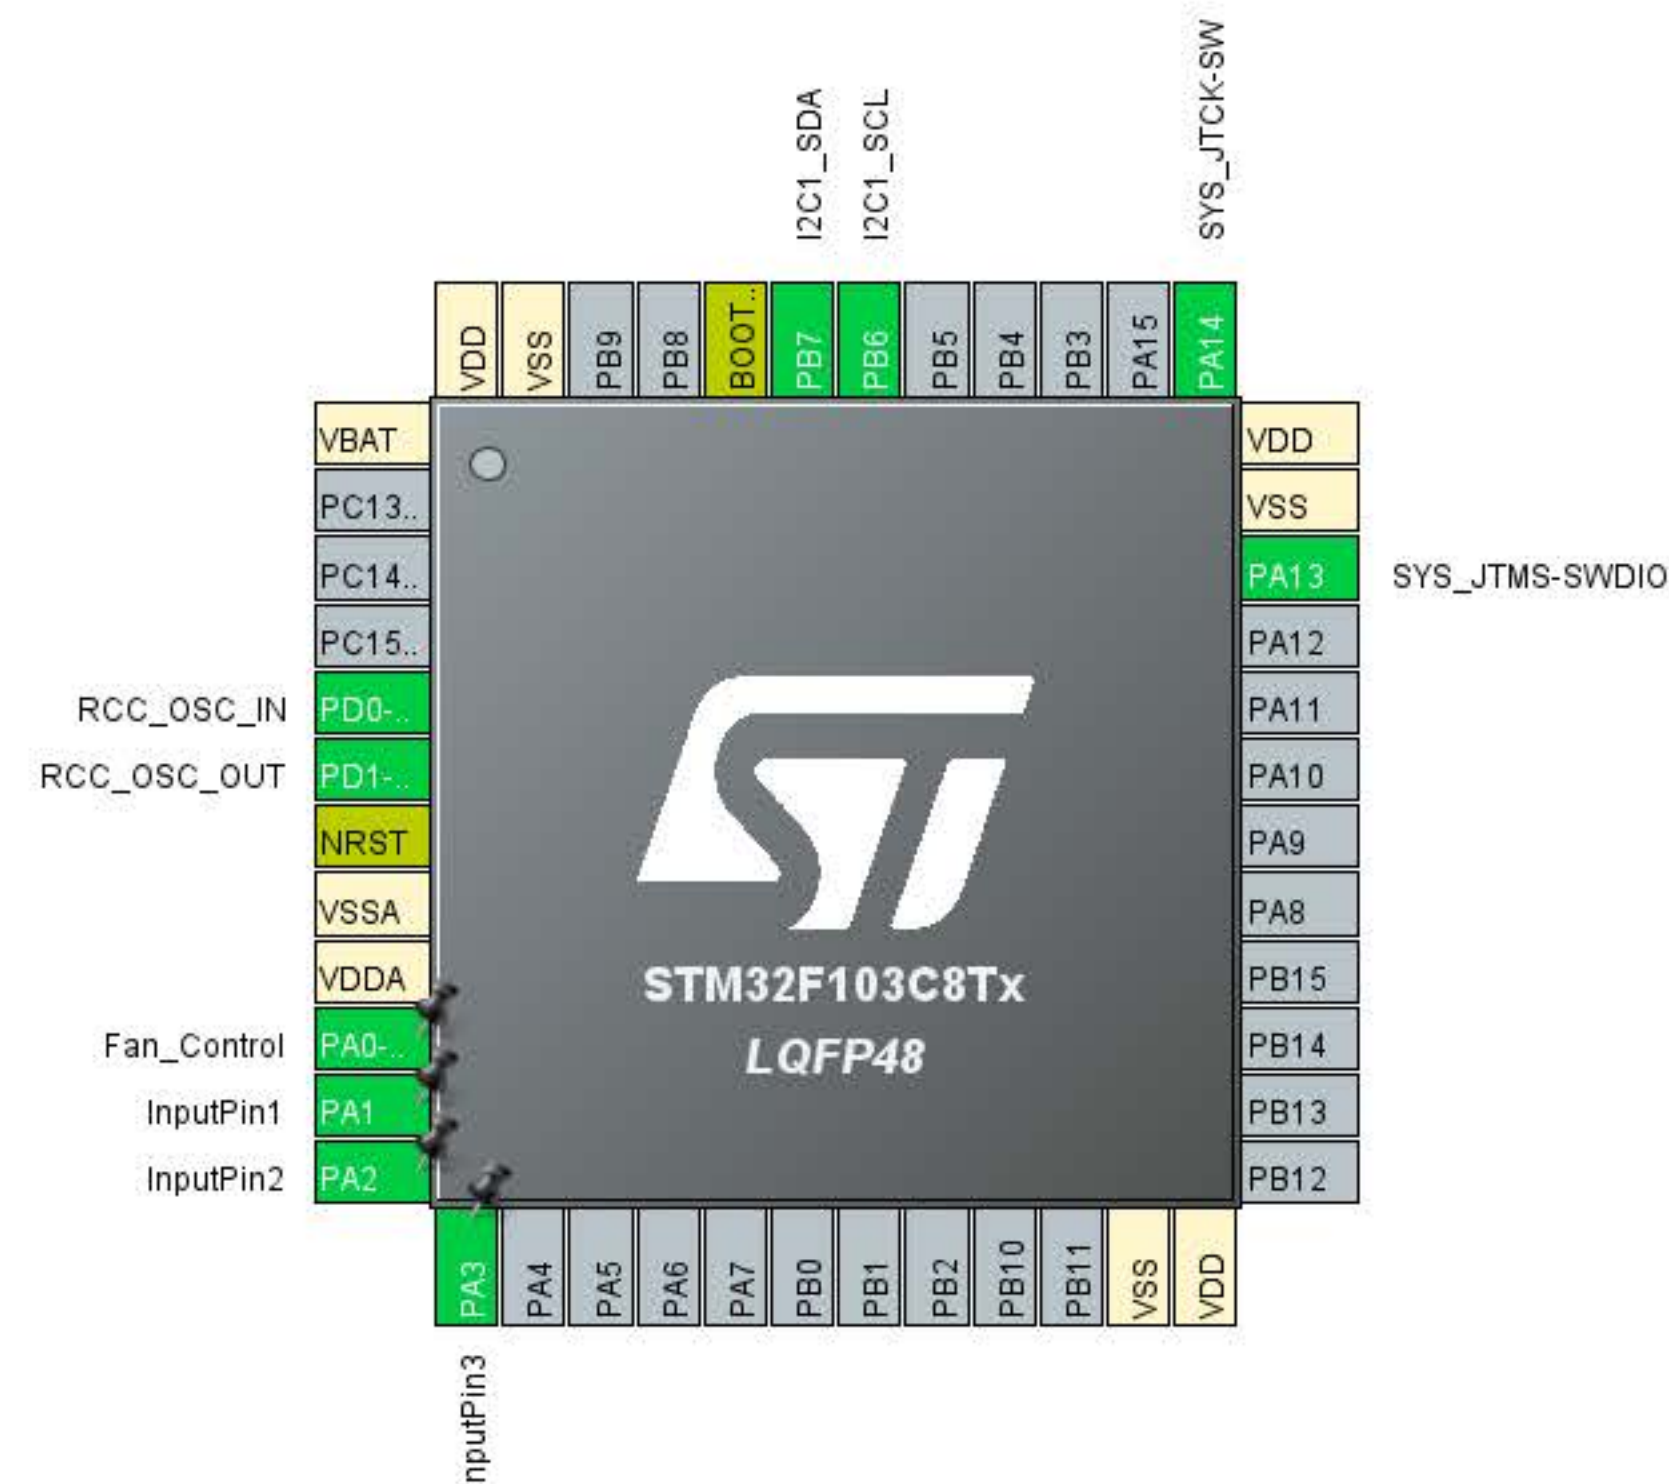

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

TIM3 Mode and Configuration

Mode

Slave Mode Trigger Source ☒ Internal ClockChannel1 Channel2 Channel3 Channel4 Combined Channels

Configuration


Reset Configuration

☒ NVIC Settings☒ DMA Settings☒ Parameter Settings☒ User Constants

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

Pinout view

System view

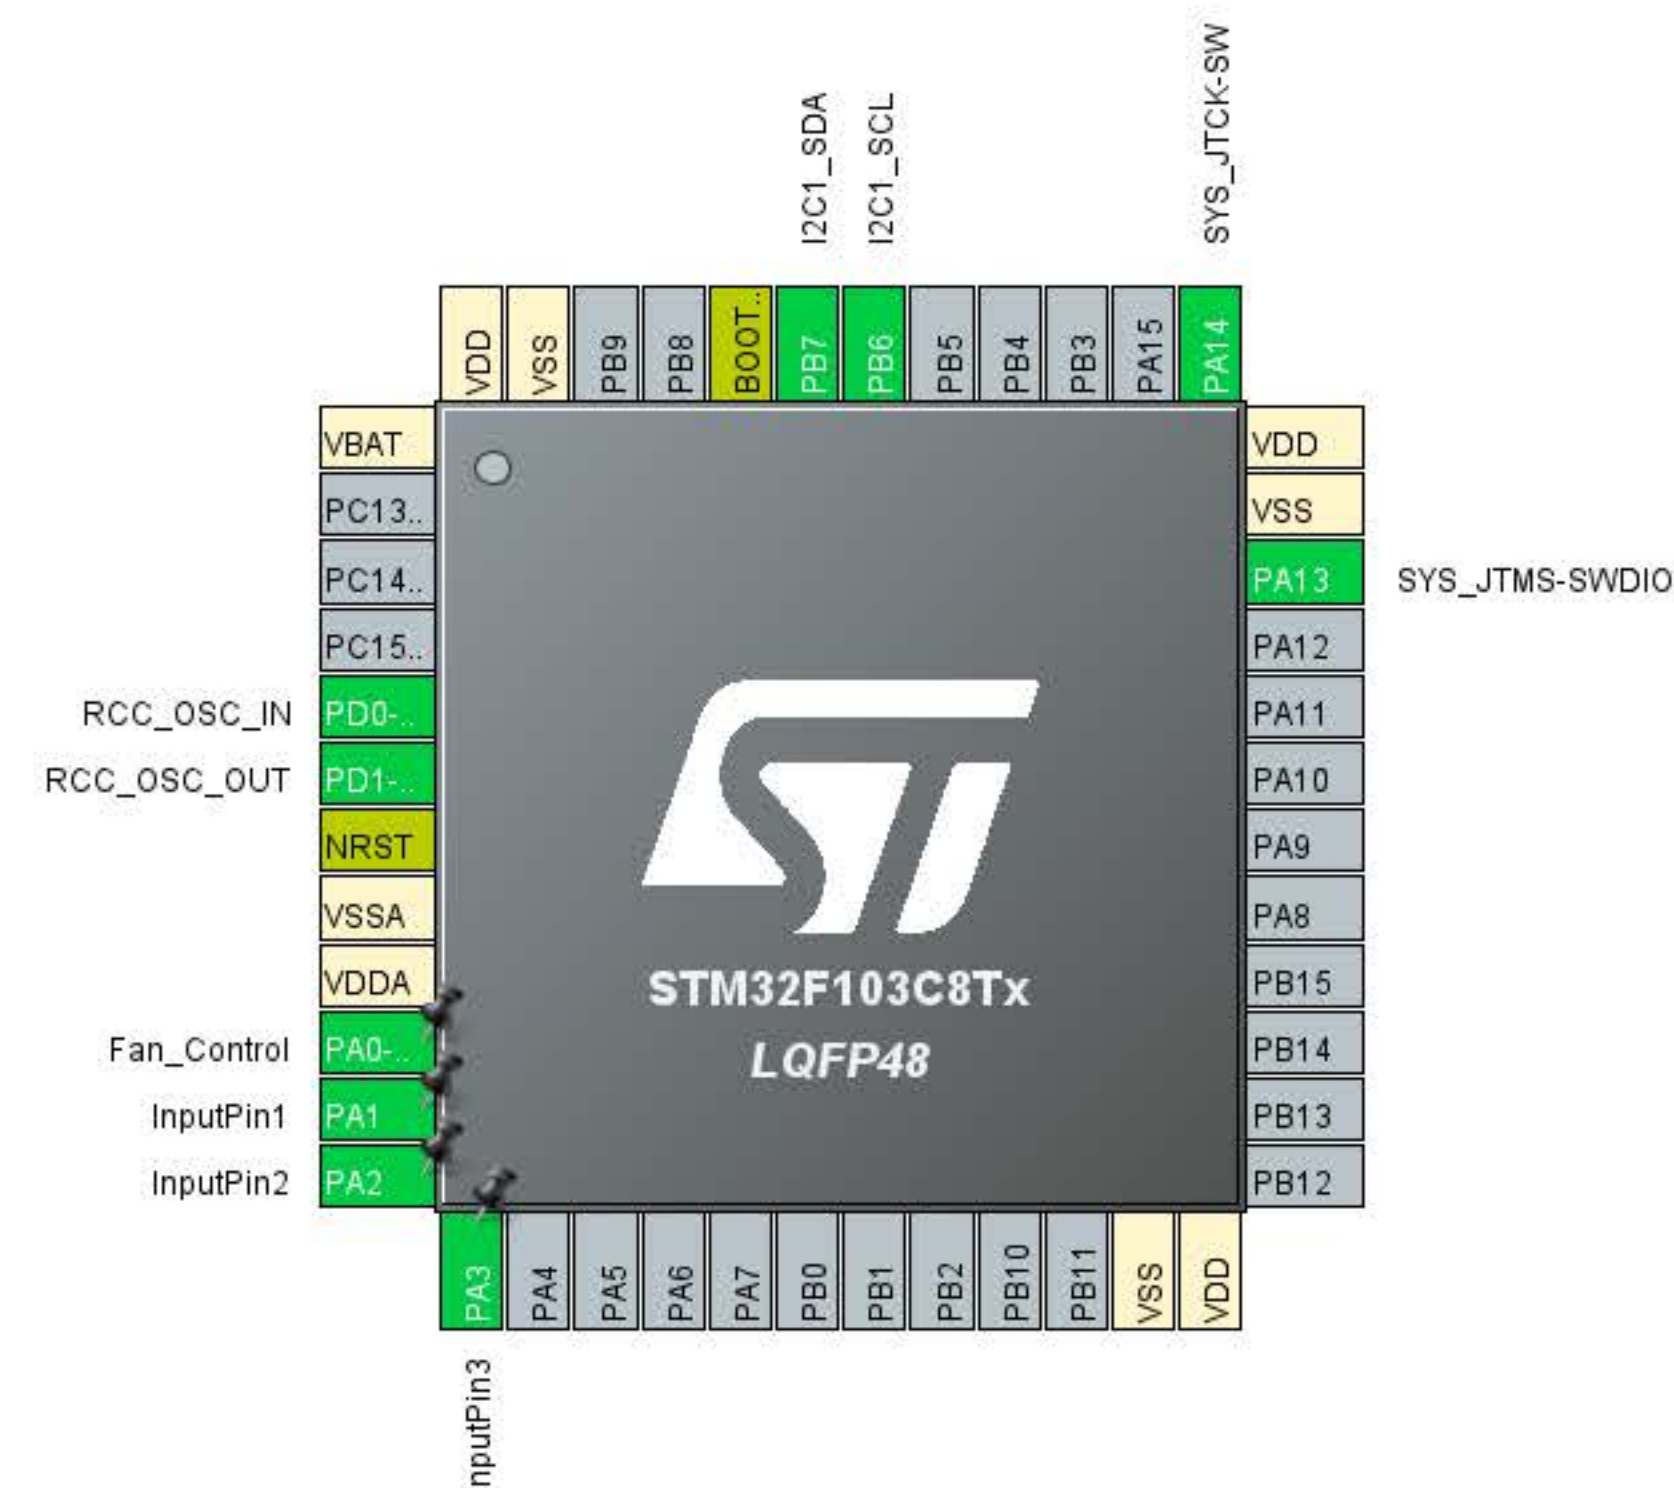

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

TIM3 Mode and Configuration

Mode

Slave Mode Trigger Source ☒ Internal ClockChannel1 Channel2

Configuration

Reset Configuration

☒ NVIC Settings☒ DMA Settings☒ Parameter Settings☒ User Constants

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bit...) 7999

Counter Mode Up

Counter Period (AutoRel...) 499


Internal Clock Division (...) No Division

auto-reload preload Disable

Trigger Output (TRGO) Param...

Pinout view

System view

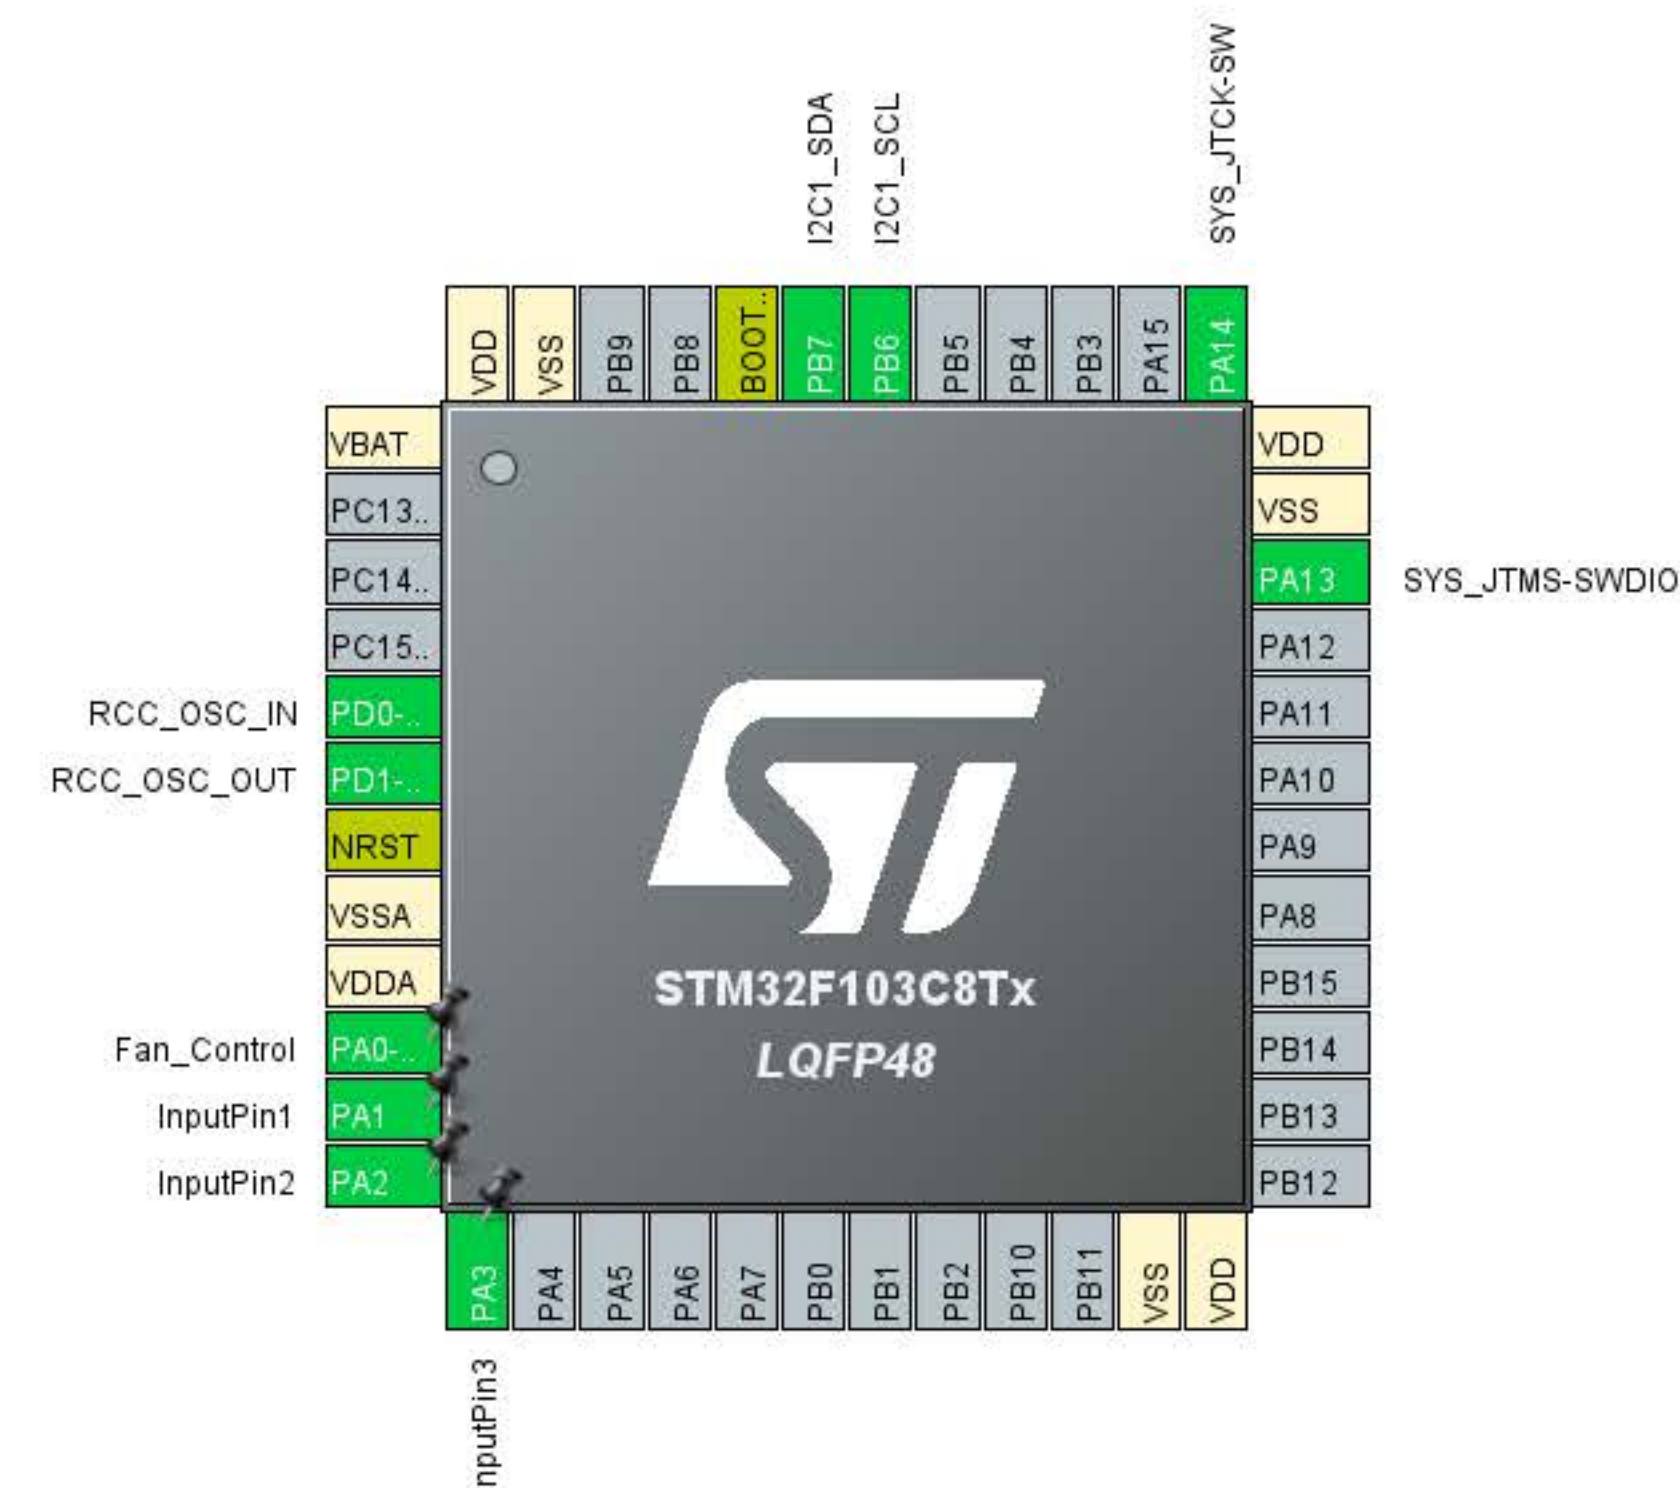

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A->Z

Timers

RTC

TIM1

TIM2

✓ TIM3

⚠ TIM4

Connectivity

CAN

✓ I2C1

I2C2

SPI1

SPI2

USART1

⊘ USART2

USART3

USB

I2C1 Mode and Configuration

Mode

I2C

I2C

Configuration

Reset Configuration

✓ NVIC Settings

✓ DMA Settings

✓ GPIO Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Search (Ctrl+F)



Master Features

I2C Speed Mode

Standard Mode

I2C Clock Speed (Hz)

100000

Slave Features

Clock No Stretch Mode

Disabled

Primary Address Length...

7-bit

Dual Address Acknowledge...

Disabled

Pinout view

System view

