



01 ESP32-C5 / BOOT / RESET

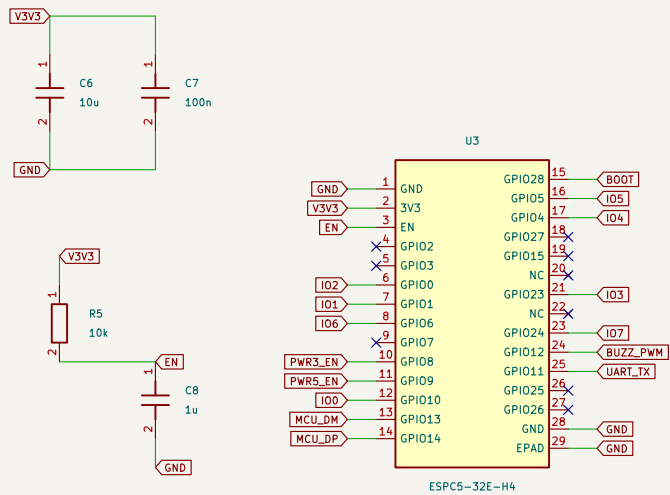


External dual-band U.FL antenna; 3.3 V GPIO only.

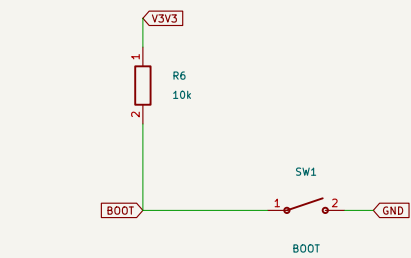


Hold BOOT, then power on or short EN to GND.

SW1: EVQP7A01P / small side-push / front edge

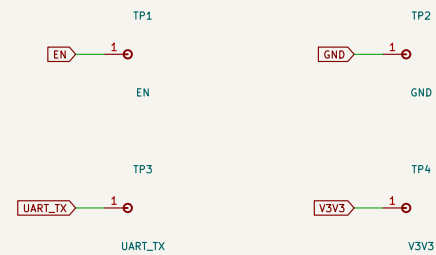


02 USB-C / INPUT PROTECTION

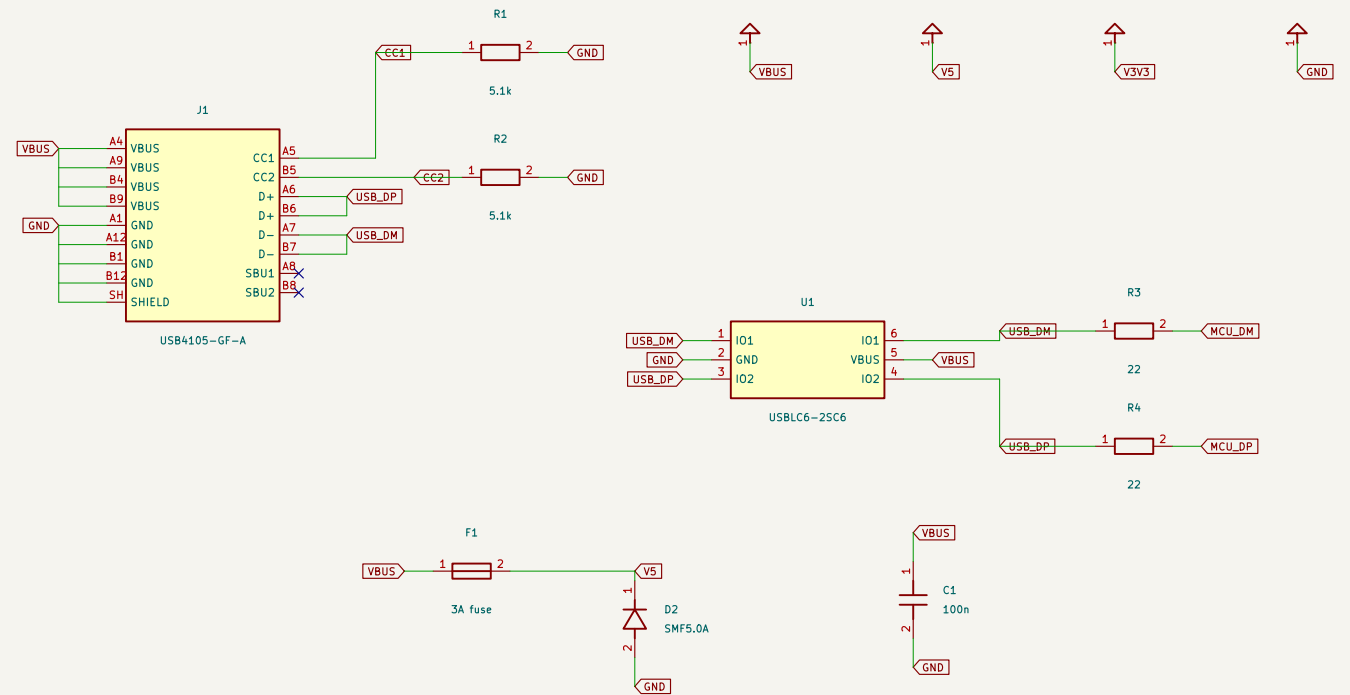


5 V / 3 A supply. No PD or OTG. External loads OFF on PC USB.

03 SGM6232 / ALWAYS-ON 3.3 V

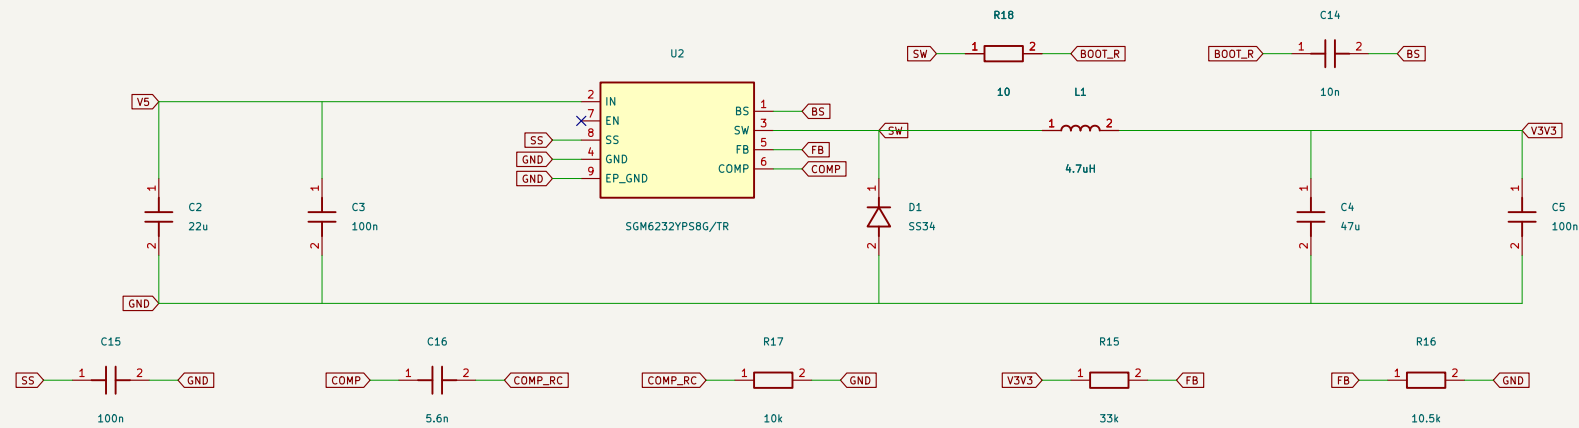


EN open: auto-start. EP to GND. FB divider $33k / 10.5k = 3.314$ V.

05 PASSIVE 5020 BUZZER

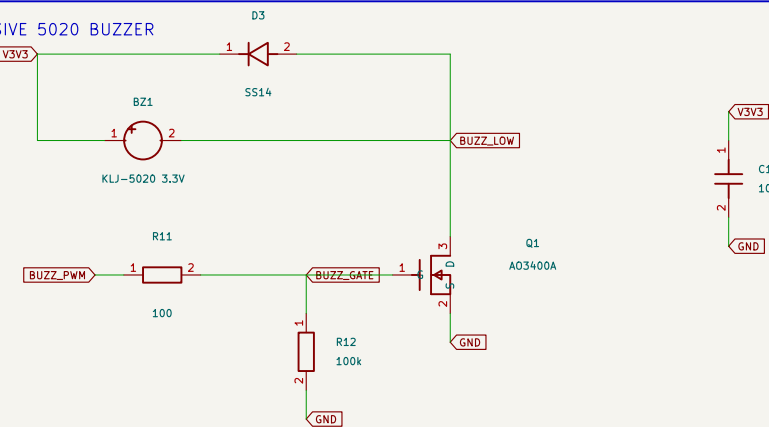


4 kHz / 50% duty. GPIO12 reserved.

06 12-PIN MALE HEADER

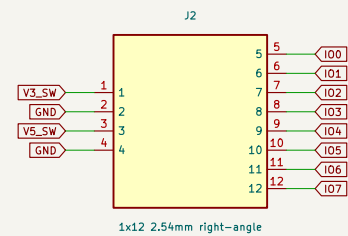

04 SWITCHED OUTPUTS / 1 A NOMINAL LIMIT

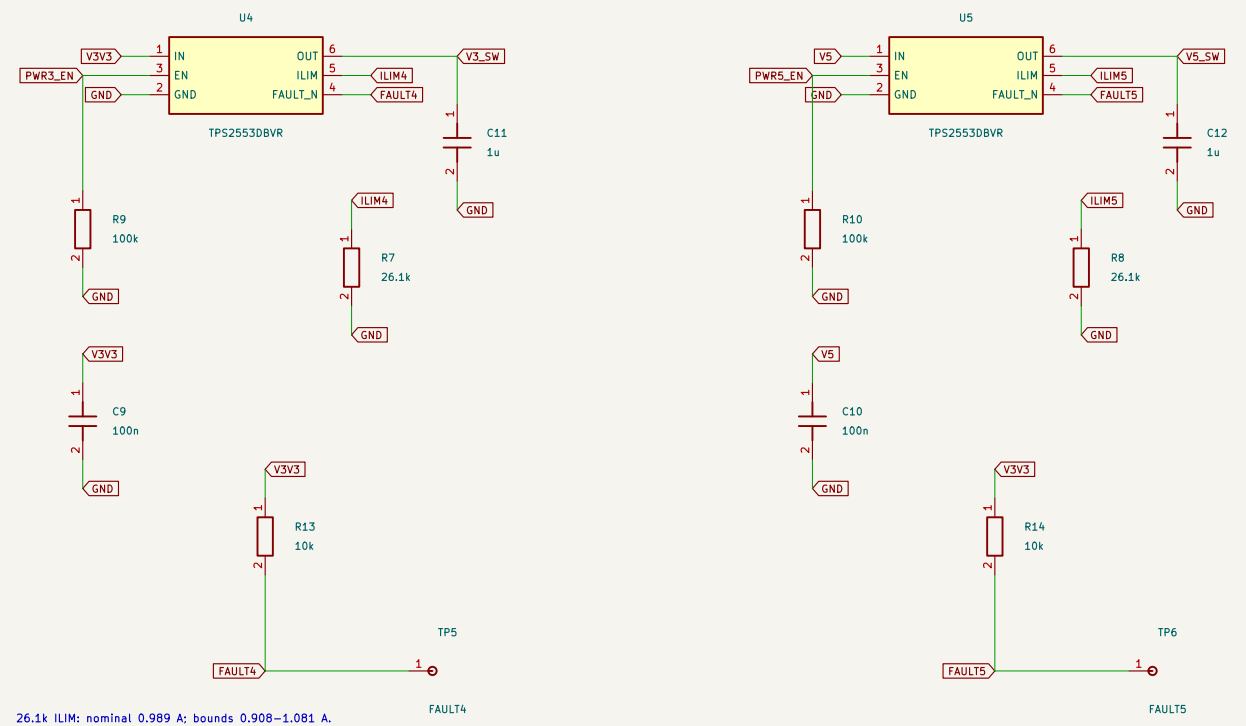

PROTOTYPE VALIDATION

Check startup, dropout, ripple, heat.

Use specified 5 V / 3 A adapter.

Verify current limit and both loaded rails.

48 x 28 mm / 2 layers / SGM6232 / prototype

GPT6-Astra / xqe2011

Sheet: /
File: saihub.kicad_sch

Title: SAIHub-Mini – ESP32-C5 GPIO CONTROLLER

Size: A3 Date: 2026-09-18

Size: A5	
KiCad E.D.A. 10.0.6	

Rev: A

id: 1/1