
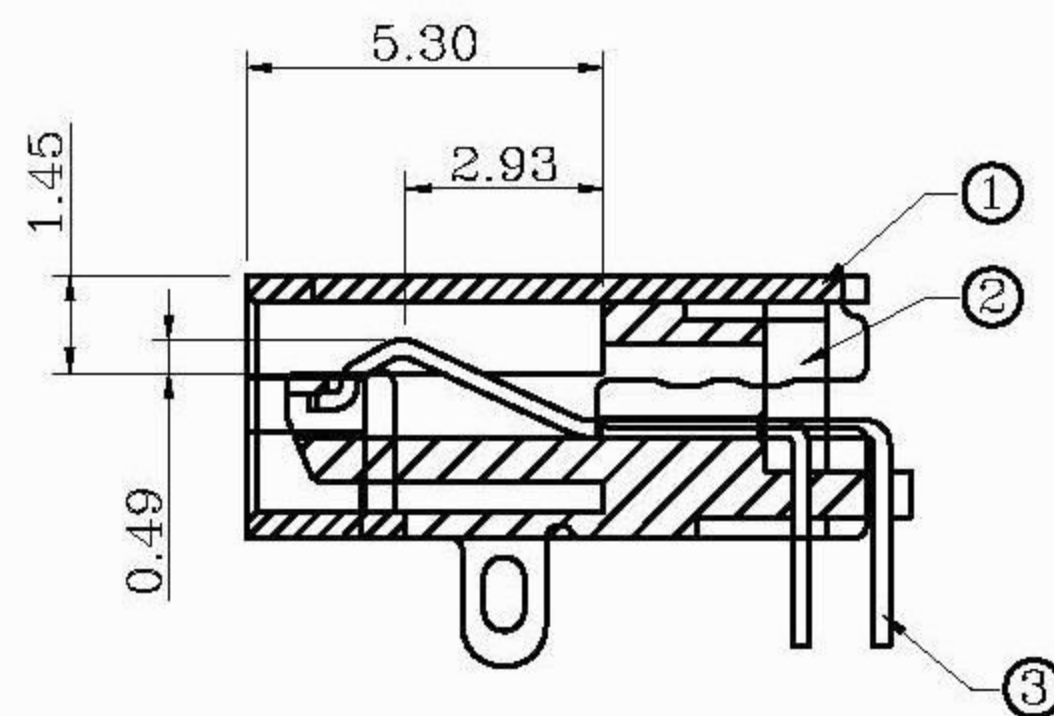
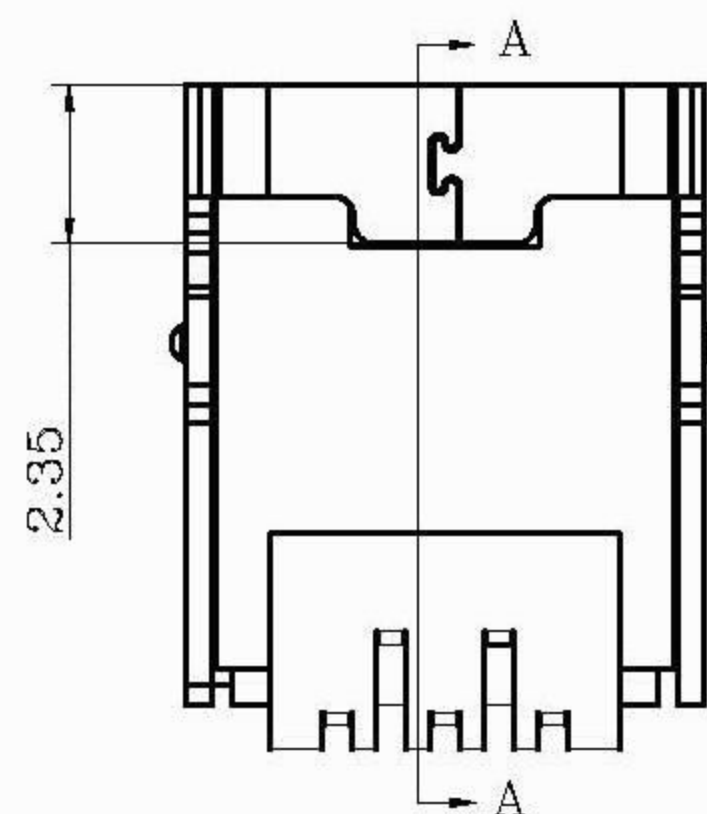
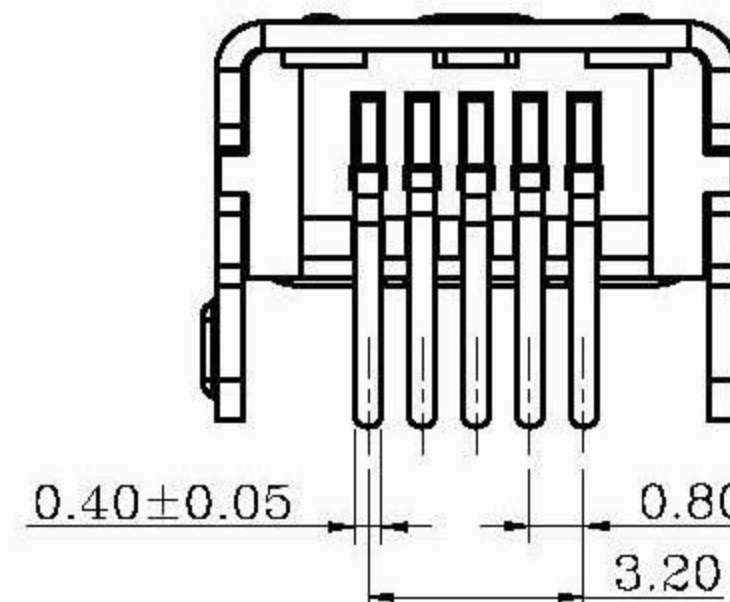
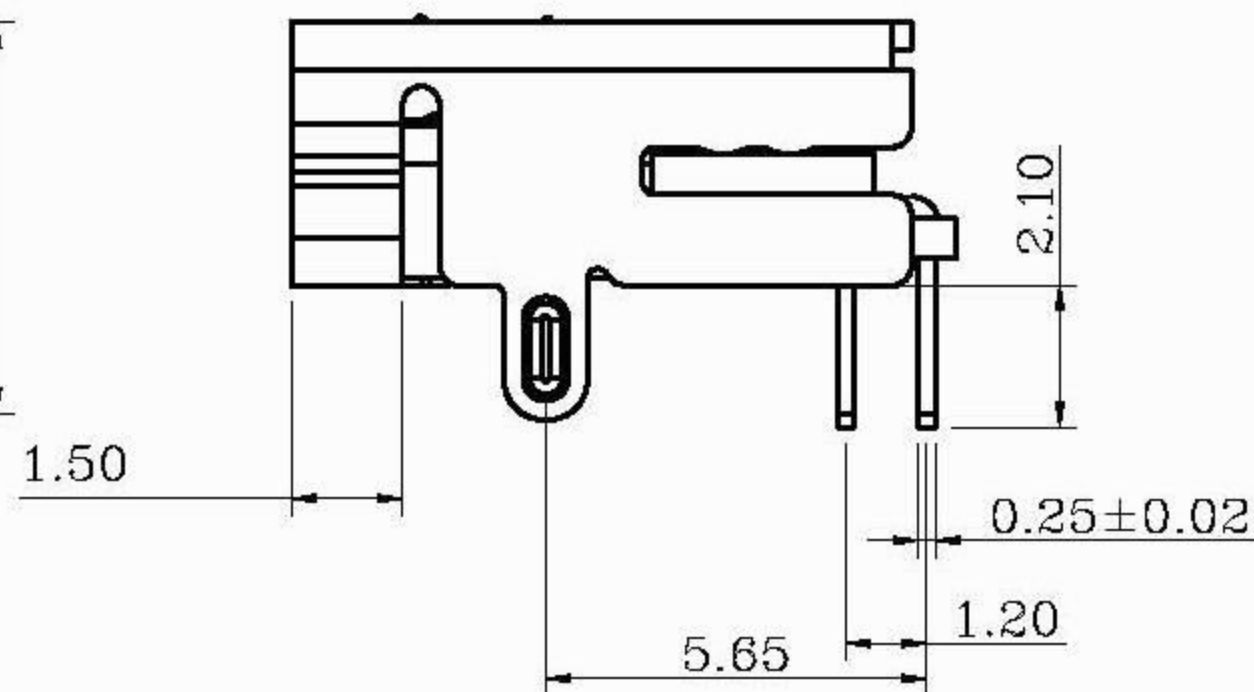


Recommended PCB Layout

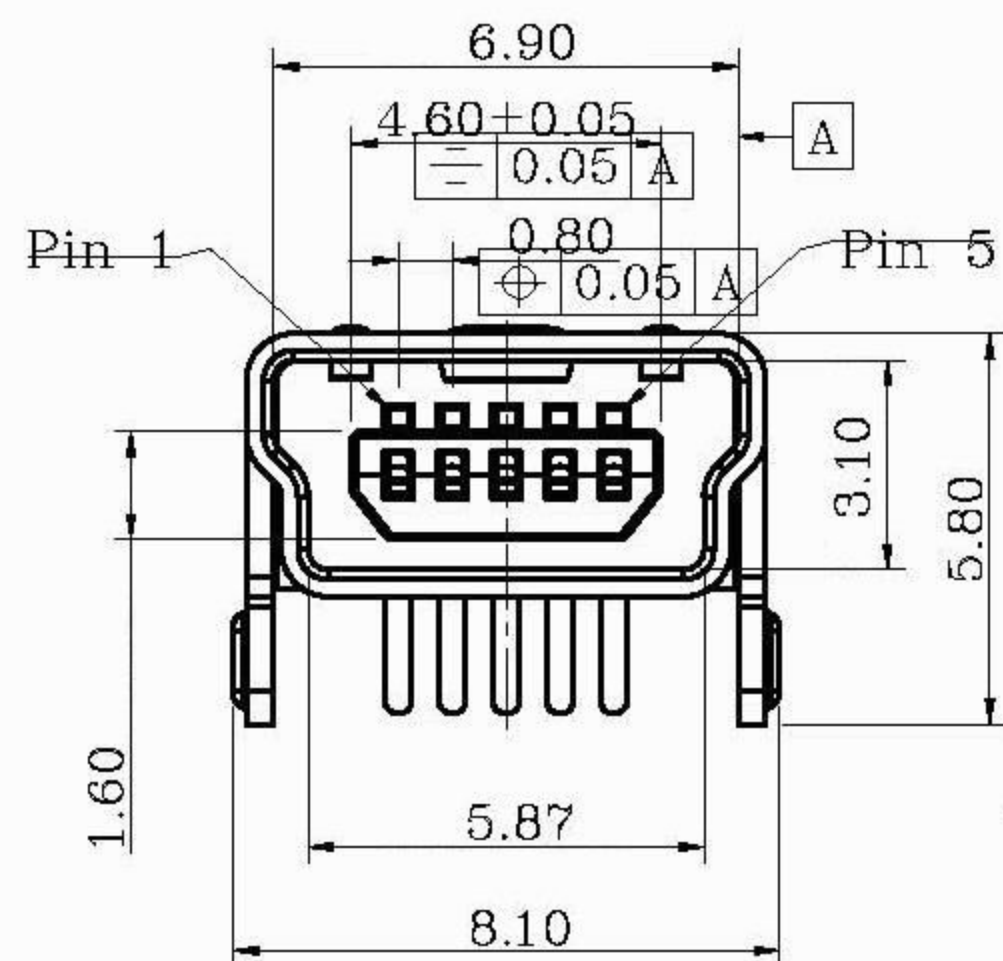

SECTION:A-A

Specification:

- 1 Current rating:1.0A AC/DC
- 2 Voltage rating:50V AC/DC
- 3 Contact resistance:30m milliohms max
- 4 Insulation resistance:500 Mega ohms min
- 5 Withstanding voltage:500V AC/minute
- 6 Temperature range:-25°C to +80°C

③	CONTACT	5	C2680	GOLD PLATED OVER NICKEL
②	HOUSING	1	LCP	UL94V-0
①	SHELL	1	BRASS	GOLD PLATING
ITEM	PART NAME	Q'TY/PCS	MATETIALS	NOTE

GENERAL TOLERANCE				DWG NO	DRAWING		BOBY	SCALE	NA
X± 0.35	x.'±2'	TITLE	MINI USB 5PIN DIP (两脚)	CHECKED	APPROVAL	DATE	20160302	UNIT	mm
.X± 0.30	.x'±1'								
.XX± 0.25	.xx'±0.1'	PART NO							
.XXX± 0.08	.xxx'±0.05'	SHEET							
REV	A	SIZE	A4	1/1					