



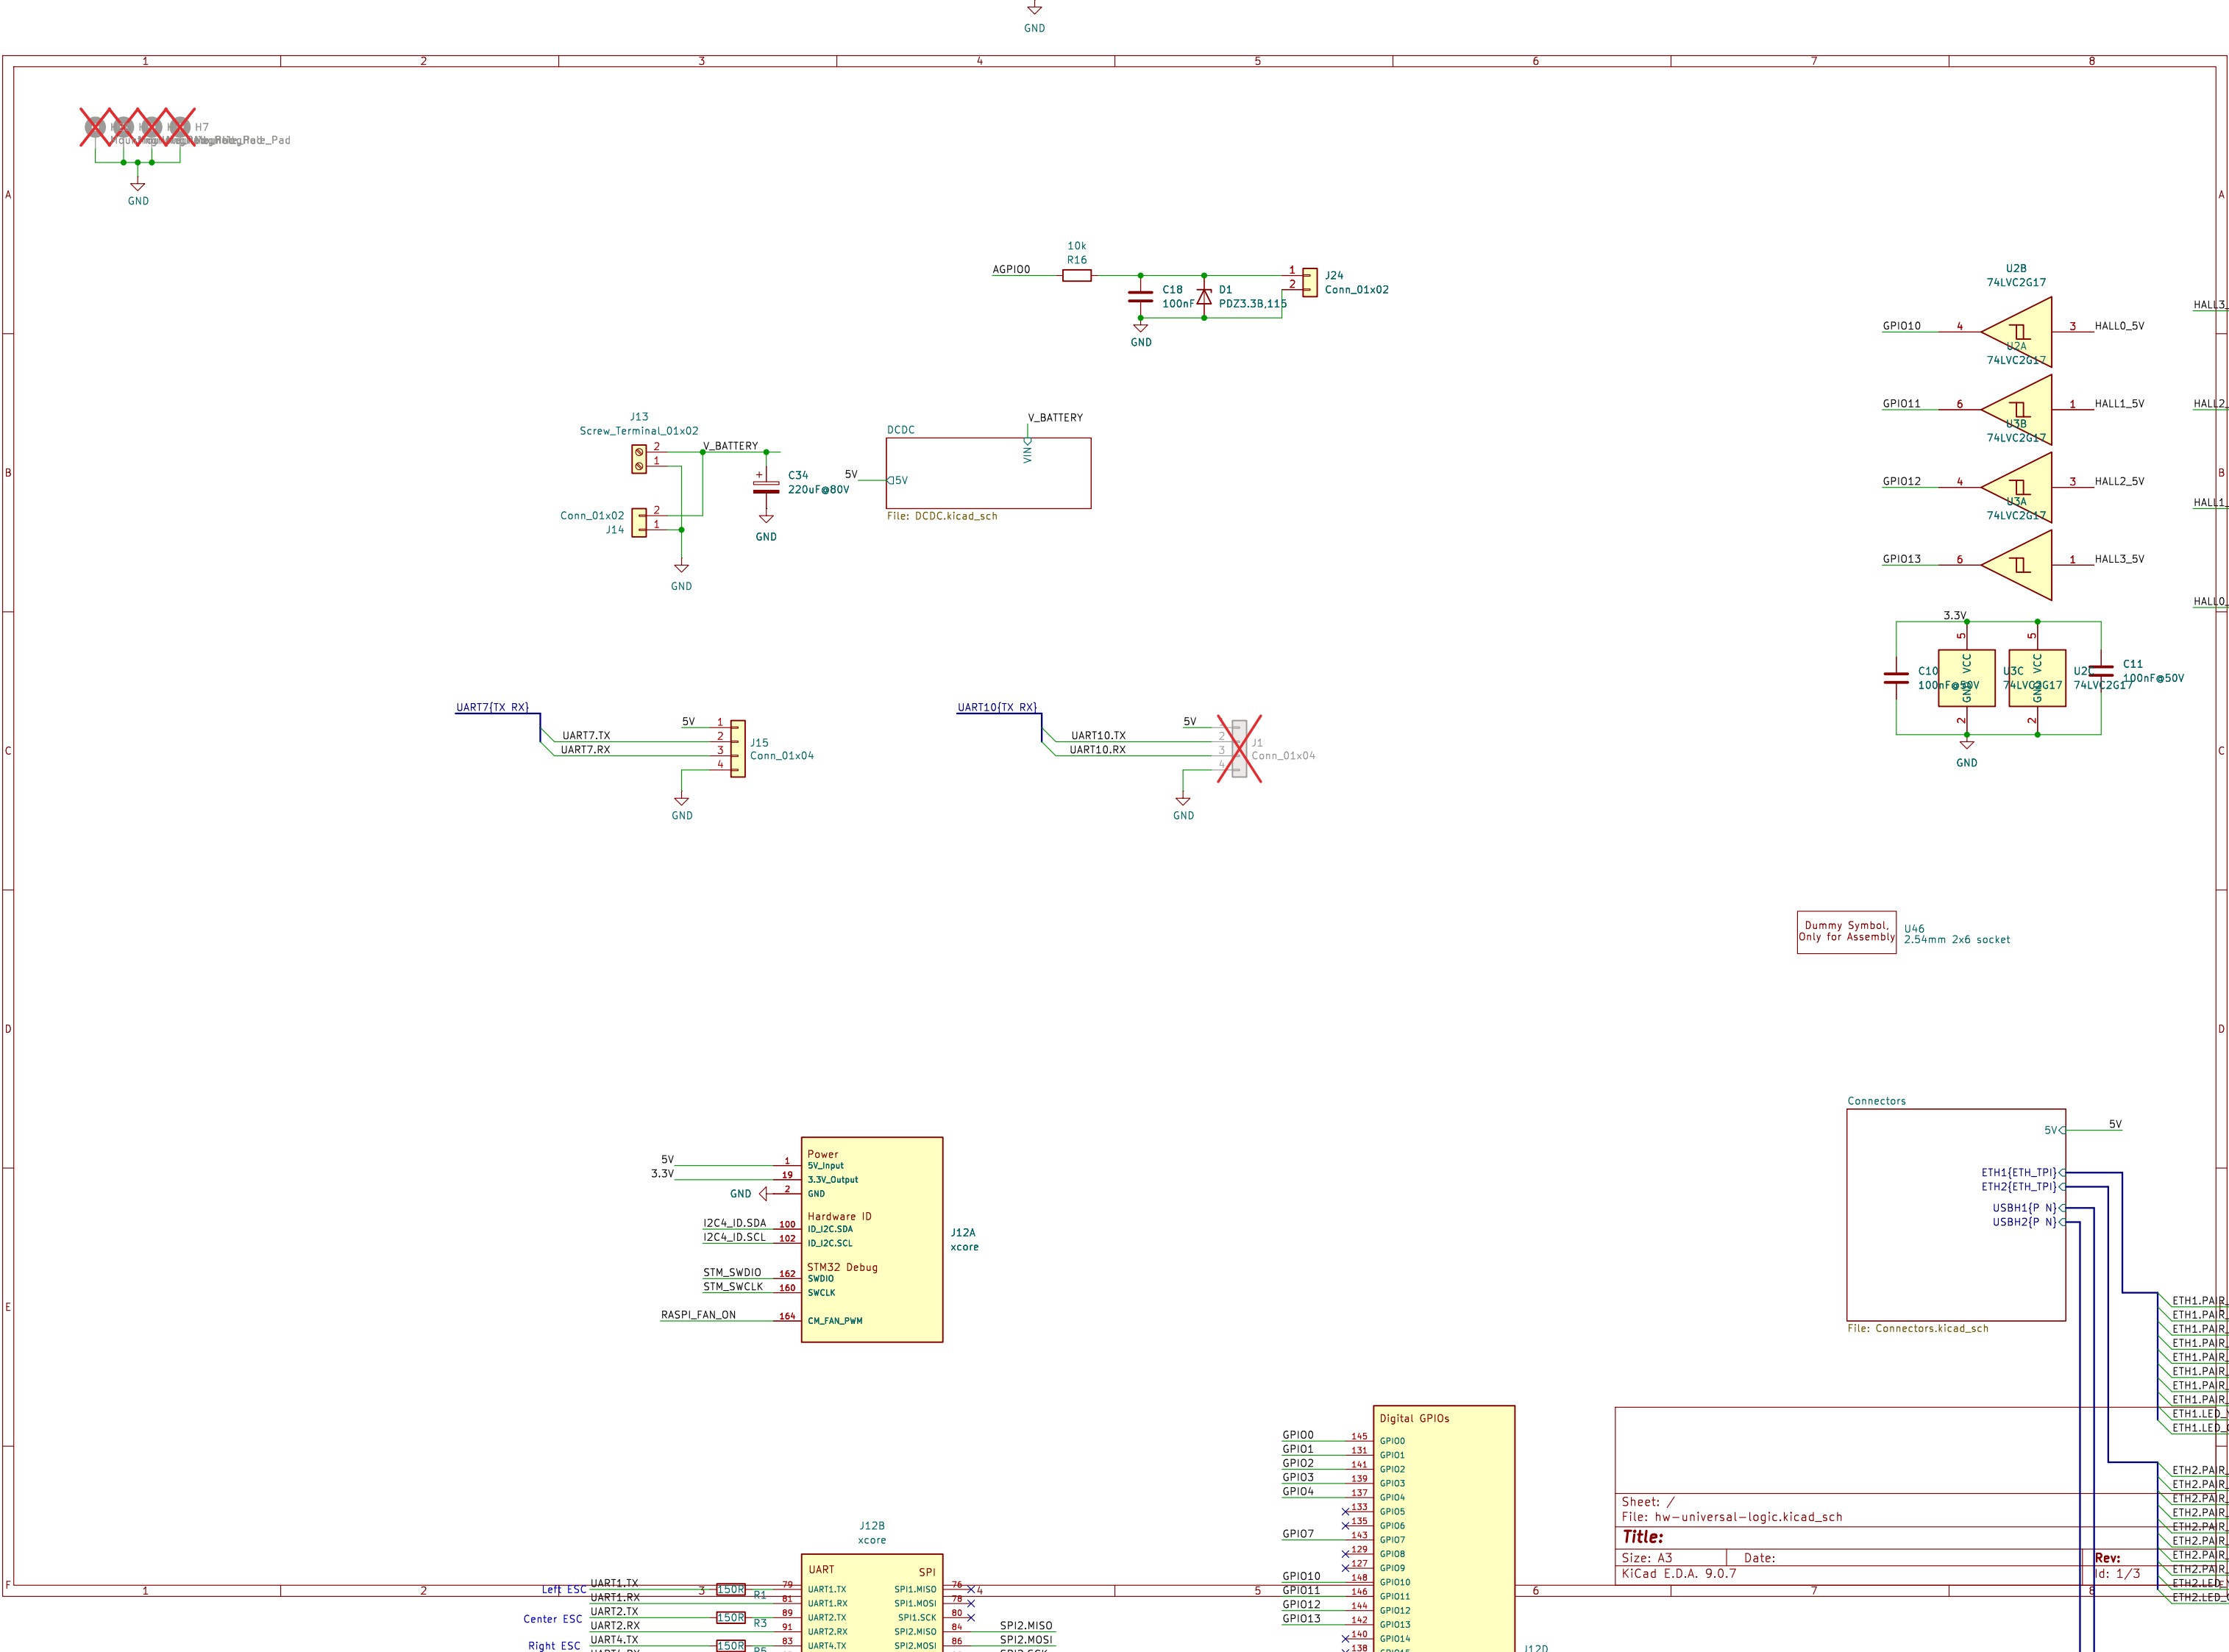

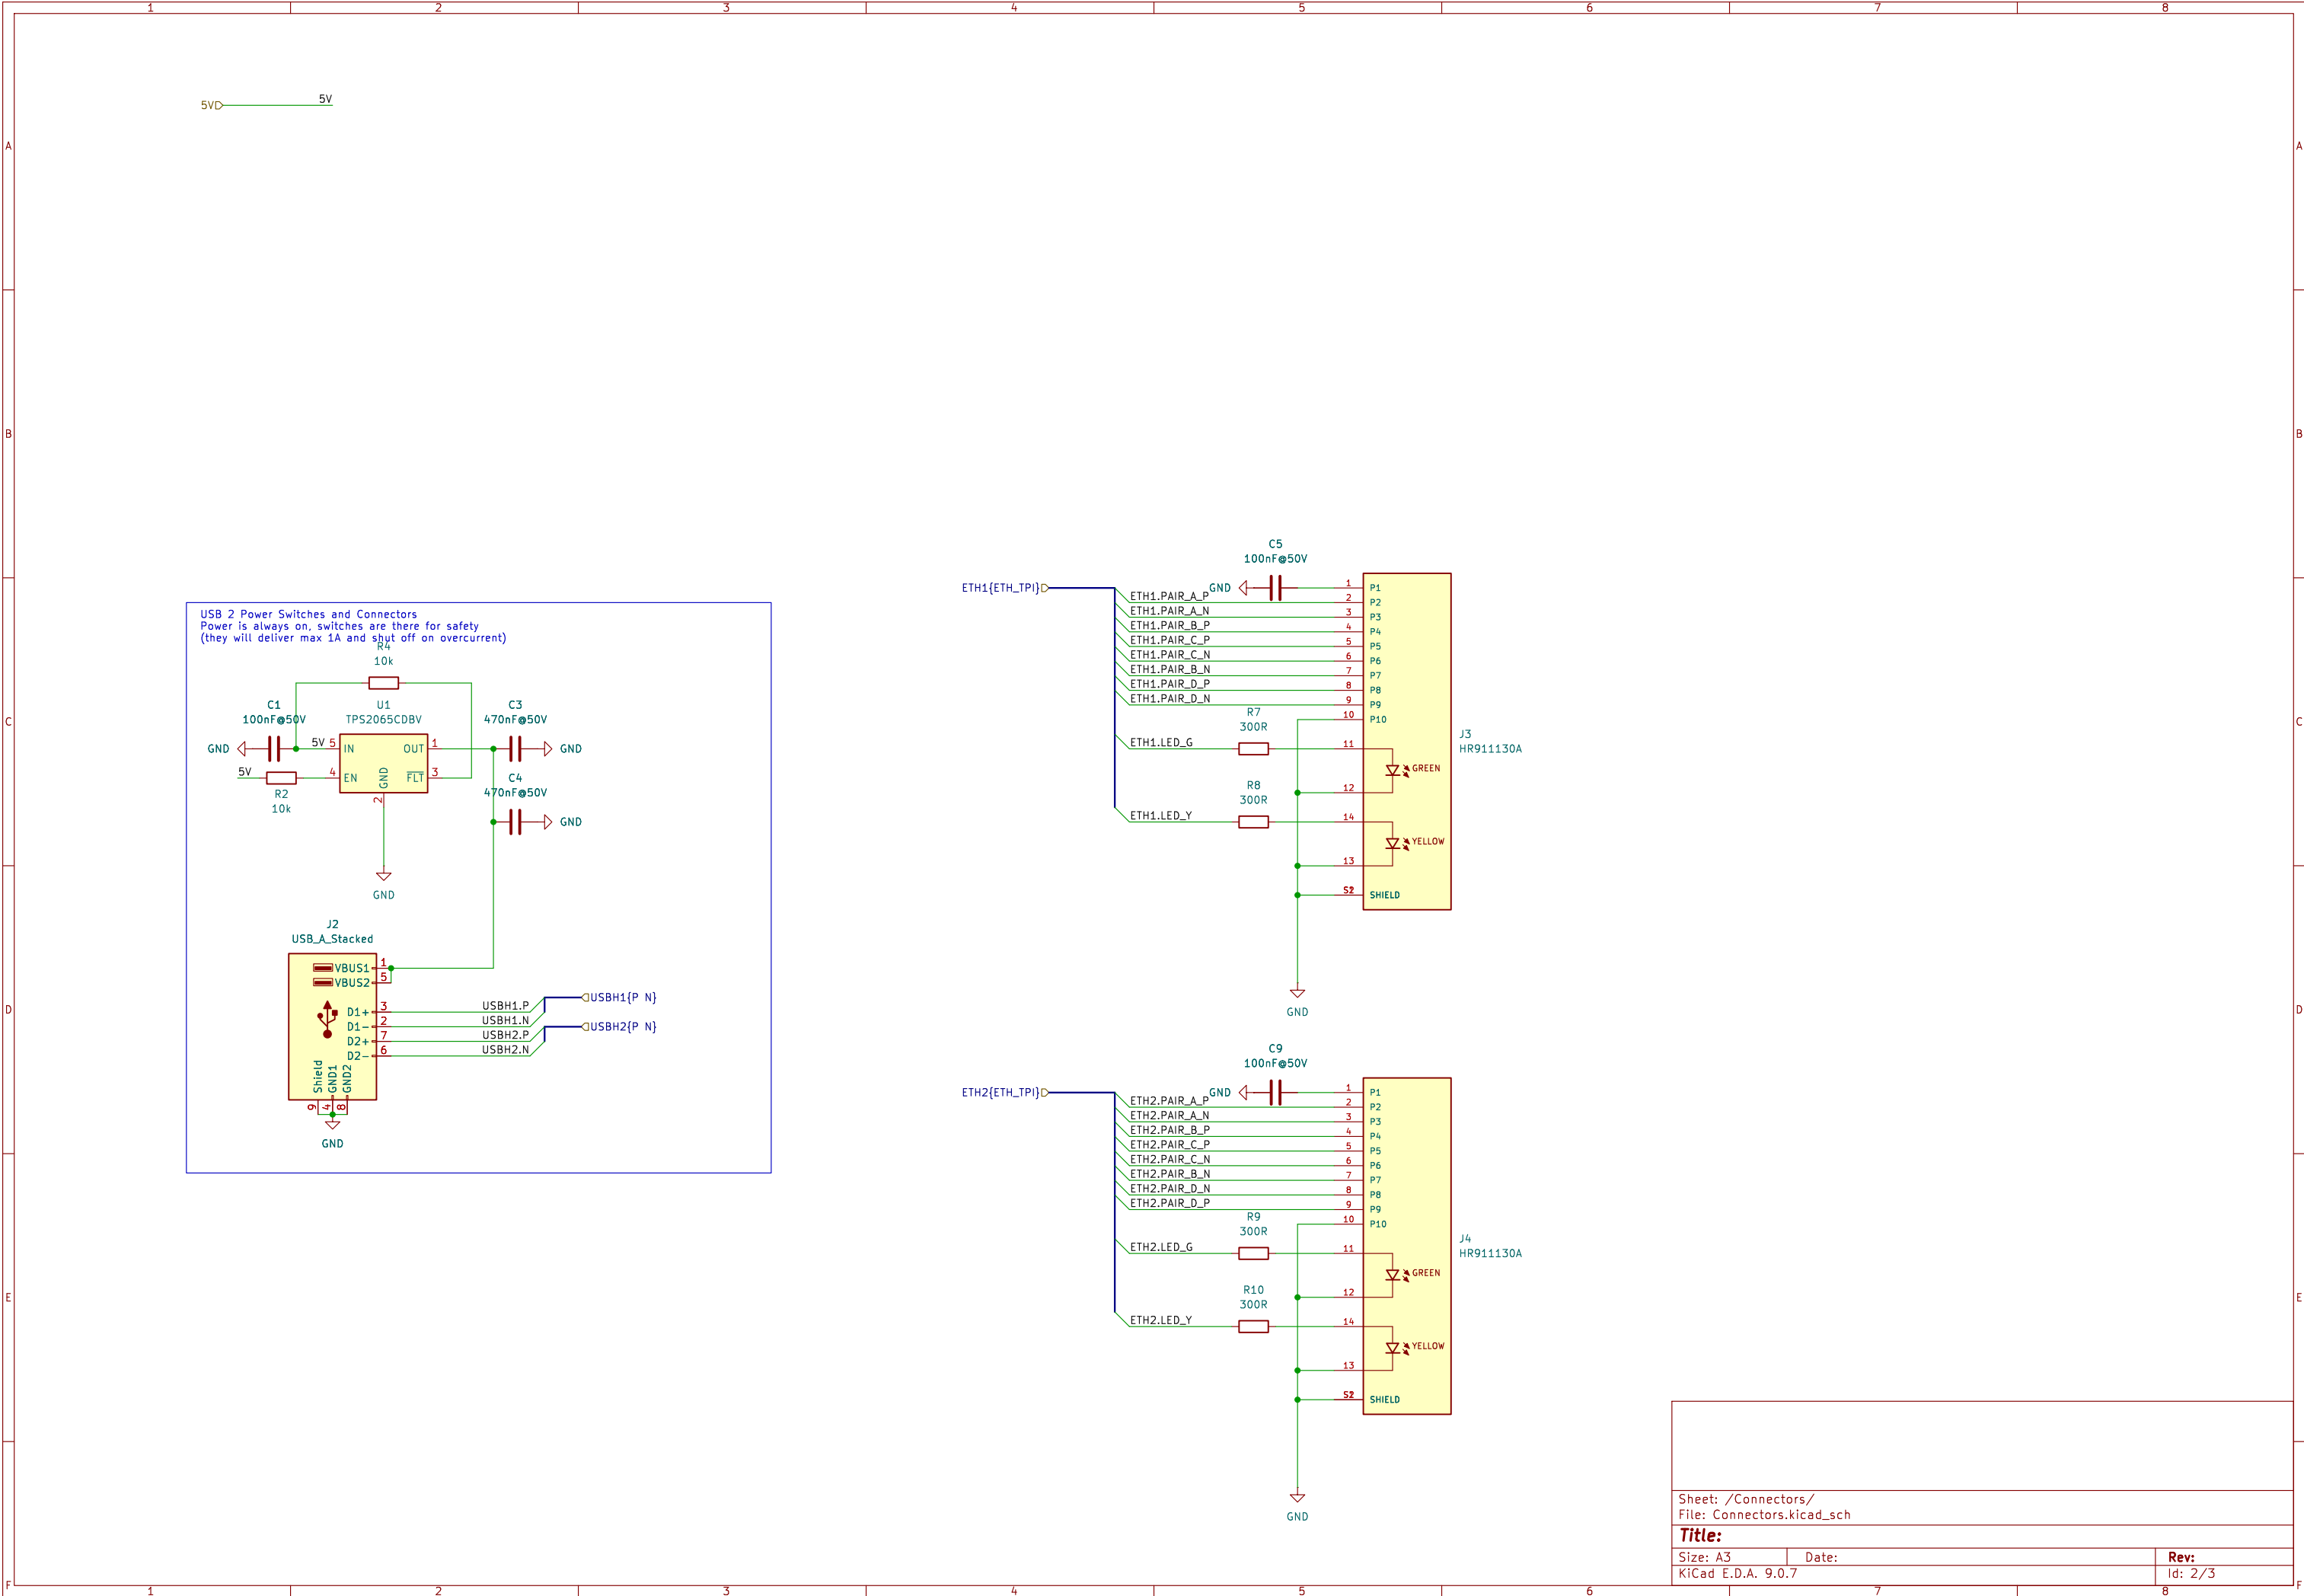

USB 2 Power Switches and Connectors
Power is always on, switches are there for safety
(they will deliver max 1A and shut off on overcurrent)

5V 5VD

10k R2

100nF@50V C1

TPS2065CDBV U1

470nF@50V C3

470nF@50V C4

J2 USB_A_Stacked

VBUS1 1

VBUS2 5

D1+ 3

D1- 2

D2+ 7

D2- 6

Shield 4

GND1 8

GND2 9

USBH1.P

USBH1.N

USBH2.P

USBH2.N

USBH1{P N}

USBH2{P N}

ETH1{ETH_TPI}

ETH1.PAIR_A_P

ETH1.PAIR_A_N

ETH1.PAIR_B_P

ETH1.PAIR_B_N

ETH1.PAIR_C_P

ETH1.PAIR_C_N

ETH1.PAIR_D_P

ETH1.PAIR_D_N

ETH1.LED_G

ETH1.LED_Y

GREEN

YELLOW

SHIELD

GND

J3 HR911130A

ETH2{ETH_TPI}

ETH2.PAIR_A_P

ETH2.PAIR_A_N

ETH2.PAIR_B_P

ETH2.PAIR_B_N

ETH2.PAIR_C_P

ETH2.PAIR_C_N

ETH2.PAIR_D_P

ETH2.PAIR_D_N

ETH2.LED_G

ETH2.LED_Y

GREEN

YELLOW

SHIELD

GND

J4 HR911130A

Sheet: /Connectors/
File: Connectors.kicad_sch

Title:

Size: A3 Date: Rev: Id: 2/3

